デベロッパーガイド

AWS SDK for Go v2

Copyright © 2026 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

AWS SDK for Go v2: デベロッパーガイド

Copyright © 2026 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

Amazon の商標およびトレードドレスは Amazon 以外の製品およびサービスに使用することはできません。また、お客様に誤解を与える可能性がある形式で、または Amazon の信用を損なう形式で使用することもできません。Amazon が所有していないその他のすべての商標は Amazon との提携、関連、支援関係の有無にかかわらず、それら該当する所有者の資産です。

Table of Contents

AWS SDK for Go v2 とは ... 1
SDK メジャーバージョンのメンテナンスとサポート ... 1
はじめに ... 2
Amazon アカウントを取得する ... 2
AWS SDK for Go v2 をインストールする ... 2
AWS アクセスキーを取得する ... 3
アクセスキー ID とシークレットアクセスキーを取得するには: ... 3
関連トピック ... 4
オペレーションを呼び出す ... 4
SDK を設定 ... 6
AWS 共有設定ファイルのロード ... 6
AWS リージョンの指定 ... 7
環境変数を使用してリージョンを設定する ... 7
リージョンをプログラムで指定する ... 7
認証情報の指定 ... 7
タスク用の IAM ロール ... 9
Amazon EC2 インスタンスの IAM ロール ... 9
共有認証情報と設定 ... 9
環境可変 ... 12
認証情報をプログラムで指定する ... 13
認証 ... 17
定義 ... 17
認証スキームの解決ワークフロー ... 20
ネイティブでサポートされている `AuthScheme` ... 21
クライアントエンドポイント ... 23
カスタマイズ ... 24
V2: `EndpointResolverV2` + `BaseEndpoint` ... 24
V1: `EndpointResolver` ... 28
移行 ... 31
HTTP クライアント ... 34
設定ロード時のオーバーライド ... 35
タイムアウト ... 35
Dialer ... 35
トランスポート ... 36

インターセプター ... 39
インターセプターとミドルウェアの比較 ... 40
使用可能なインターセプターフック ... 40
インターセプターの登録 ... 41
グローバルなインターセプター設定 ... 42
ログ記録 ... 43
ロガー ... 43
ClientLogMode ... 43
トレースとメトリクス ... 44
トレース ... 44
メトリクス ... 45
再試行とタイムアウト ... 47
標準リトライヤ ... 48
NopRetryer ... 48
動作のカスタマイズ ... 48
タイムアウト ... 53
SDK の使用 ... 55
サービスクライアントの作成 ... 55
NewFromConfig ... 55
新 ... 56
サービスオペレーションの呼び出し ... 58
サービスオペレーションへのパラメータの受け渡し ... 58
オペレーション呼び出し時のクライアントオプションのオーバーライド ... 59
オペレーションレスポンスの処理 ... 60
サービスクライアントの同時使用 ... 62
オペレーションページネーターの使用 ... 64
ウェーターを使用する ... 65
ウェーター設定のオーバーライド ... 67
高度なウェーター設定のオーバーライド ... 68
SDK でのエラー処理 ... 70
エラーのログ記録 ... 70
サービスクライアントのエラー ... 70
リクエスト ID の取得 ... 72
AWS サービスを使用する ... 74
Amazon S3 チェックサム ... 74
オブジェクトのアップロード ... 75

オブジェクトのダウンロード ... 78
SDK ユーティリティ ... 79
Amazon RDS ユーティリティ ... 79
IAM 認証 ... 79
Amazon CloudFront ユーティリティ ... 80
Amazon CloudFront URL Signer ... 80
Amazon EC2 インスタンスメタデータサービス ... 81
Amazon S3 ユーティリティ ... 82
Amazon S3 転送マネージャー ... 82
シーク不可能なストリーミング入力 ... 92
ミドルウェア ... 94
カスタムミドルウェアの記述 ... 95
すべてのクライアントへのミドルウェアのアタッチ ... 97
特定のオペレーションへのミドルウェアのアタッチ ... 97
スタック下層へのメタデータの受け渡し ... 98
SDK が提供するメタデータ ... 99
スタック上層へのメタデータの受け渡し ... 100
よくある質問 ... 102
SDK の HTTP クライアントを設定するにはどうすればよいですか? ガイドラインやベストプラクティスはありますか? ... 102
オペレーションのタイムアウトはどう設定すればよいですか? ... 102
SDK によるリクエストがタイムアウトする、または処理に時間がかかりすぎる場合、どうすればよいですか? ... 102
`read: connection reset` エラーを修正するにはどうすればよいですか? ... 103
HTTP プロキシを SDK で使用しているときに「invalid signature」 (無効な署名) エラーが発生するのはなぜですか? ... 104
SDK オペレーションのタイミング計測 ... 104
ユニットテスト ... 111
クライアントオペレーションのモック化 ... 111
ページネーターのモック化 ... 113
コードの例 ... 116
API ゲートウェイ ... 117
AWS コミュニティへの貢献 ... 117
Aurora ... 118
はじめに ... 118
基本 ... 120

アクション 138
Amazon Bedrock 158
はじめに 118
アクション 138
Amazon Bedrock ランタイム 161
はじめに 118
Amazon Nova 164
Amazon Titan Image Generator 165
Anthropic Claude 168
CloudFormation 169
アクション 138
CloudWatch Logs 171
アクション 138
Amazon Cognito ID プロバイダー 173
はじめに 118
アクション 138
シナリオ 189
Amazon DocumentDB 256
サーバーレスサンプル 256
DynamoDB 257
基本 120
アクション 138
シナリオ 189
サーバーレスサンプル 256
AWS コミュニティへの貢献 117
IAM 331
はじめに 118
基本 120
アクション 138
Kinesis 393
サーバーレスサンプル 256
Lambda 396
はじめに 118
基本 120
アクション 138
シナリオ 189

サーバーレスサンプル 256
AWS コミュニティへの貢献 117
Amazon MSK 508
サーバーレスサンプル 256
パートナーセントラル 509
アクション 138
Amazon RDS 512
はじめに 118
基本 120
アクション 138
サーバーレスサンプル 256
Amazon Redshift 548
はじめに 118
基本 120
アクション 138
Amazon S3 567
開始方法 118
基本 120
アクション 138
シナリオ 189
サーバーレスサンプル 256
Amazon SNS 657
はじめに 118
アクション 138
シナリオ 189
サーバーレスサンプル 256
Amazon SQS 686
はじめに 118
アクション 138
シナリオ 189
サーバーレスサンプル 256
v2 への移行 719
Go の最小バージョン要件 719
モジュール化 719
設定のロード 720
例 26

モック化と *iface ... 723
認証情報と認証情報プロバイダー ... 724
静的な認証情報 ... 13
Amazon EC2 IAM ロールの認証情報 ... 726
エンドポイント認証情報 ... 727
プロセス認証情報 ... 727
AWS Security Token Service 認証情報 ... 728
サービスクライアント ... 730
クライアントの作成 ... 731
エンドポイント ... 733
認証 ... 733
API オペレーションの呼び出し ... 734
サービスデータ型 ... 735
ポインタパラメータ ... 735
エラー型 ... 736
ページネーター ... 738
ウェーター ... 739
事前署名リクエスト ... 739
リクエストのカスタマイズ ... 741
オペレーションの入力/出力 ... 742
HTTP リクエスト/レスポンス ... 746
ハンドラーフェーズ ... 748
機能 ... 750
Amazon EC2 インスタンスメタデータサービス ... 750
Amazon S3 Transfer Manager ... 751
Amazon CloudFront 署名ユーティリティ ... 751
Amazon S3 暗号化クライアント ... 752
サービスカスタマイズの変更点 ... 752
Amazon S3 ... 752
セキュリティ ... 755
データ保護 ... 755
コンプライアンス検証 ... 756
耐障害性 ... 757
最小 TLS バージョンの適用 ... 757
TLS バージョンの設定 ... 758
ドキュメント履歴 ... 760

..... dcclxi

AWS SDK for Go v2 とは

AWS SDK for Go v2 は、Amazon Elastic Compute Cloud (Amazon EC2) や Amazon Simple Storage Service (Amazon S3) などの AWS サービスを使用する Go アプリケーションをビルドするデベロッパー向けに、API やユーティリティを提供します。

この SDK を使用すると、ウェブサービスインターフェイスに直接対応するコードの複雑さを解消できます。認証、リクエストの再試行、エラー処理など、多くの低レベルの処理は内部で実行されます。

この SDK には便利なユーティリティも含まれています。例えば、Amazon S3 のダウンロードおよびアップロードマネージャーは、大きなオブジェクトを複数のパートに分割して並列で転送できます。

SDK のインストール、設定、使用方法については、AWS SDK for Go デベロッパーガイドが役立ちます。このガイドには、設定情報、サンプルコード、SDK ユーティリティ概要が含まれています。

SDK メジャーバージョンのメンテナンスとサポート

SDK メジャーバージョンのメンテナンスとサポート、およびその基礎的な依存関係については、AWS SDK とツール共有設定および認証情報リファレンスガイド で以下を参照してください。

- AWS SDK とツールのメンテナンスポリシー
- AWS SDK とツールのバージョンサポートマトリクス

AWS SDK for Go の開始方法

AWS SDK for Go を使用するには、Go 1.23 以上のバージョンが必要です。次のコマンドを実行することで、Go の現在のバージョンを確認できます。

```
go version
```

Go のインストールやアップグレードの方法については、Go のドキュメントの「Download and install」を参照してください。

Amazon アカウントを取得する

AWS SDK for Go v2 を使用するには、Amazon アカウントが必要です。詳細については、「AWS アカウントを作成する」を参照してください。

AWS SDK for Go v2 をインストールする

AWS SDK for Go v2 は Go モジュールを使用します。これは Go 1.11 で導入された機能です。次の Go コマンドを実行してローカルプロジェクトを初期化します。

```
go mod init example
```

Go モジュールプロジェクトを初期化した後、`go get` コマンドを使用して SDK とその必要な依存関係を取得できるようになります。これらの依存関係は、前のコマンドで作成された `go.mod` ファイルに記録されます。

次のコマンドは、アプリケーションで使用する標準的な SDK モジュール群の取得方法を示しています。

```
go get github.com/aws/aws-sdk-go-v2
go get github.com/aws/aws-sdk-go-v2/config
```

これにより、コア SDK モジュールと、AWS 共有設定のロードに使用される設定モジュールが取得されます。

次に、アプリケーションに必要な 1 つ以上の AWS サービス API クライアントをインストールできます。すべての API クライアントは `github.com/aws/aws-sdk-go-v2/service` インポート階層下にあります。現在サポートされている API クライアントの一覧はこちらで確認できます。サー

ビスクライアントをインストールするには、次のコマンドを実行してモジュールを取得し、依存関係を go.mod ファイルに記録します。この例では、Amazon S3 API クライアントを取得します。

```
go get github.com/aws/aws-sdk-go-v2/service/s3
```

AWS アクセスキーを取得する

アクセスキーはアクセスキー ID とシークレットアクセスキーから成り、AWS に対するプログラムによるリクエストに署名するときに使用されます。アクセスキーがない場合は、AWS マネジメントコンソールを使用して作成できます。AWS ルートアカウントのアクセスキーの代わりに、IAM のアクセスキーを使用することをお勧めします。IAM では、AWS アカウントでの AWS サービスとリソースへのアクセスを安全に制御できます。

> **Note**
>
> アクセスキーを作成するには、必要な IAM アクションを実行するためのアクセス許可が必要です。詳細については、「IAM ユーザーガイド」の「IAM リソースにアクセスするために必要なアクセス許可」を参照してください。

アクセスキー ID とシークレットアクセスキーを取得するには:

1. [IAM コンソール] を開きます。
2. ナビゲーションメニューで [ユーザー] を選択します。
3. IAM ユーザー名 (チェックボックスではありません) を選択します。
4. [認証情報] タブを開き、次に [アクセスキーの作成] を選択します。
5. 新しいアクセスキーを表示するには、[表示] を選択します。認証情報は次のようになります。
   - アクセスキー ID: AKIAIOSFODNN7EXAMPLE
   - シークレットアクセスキー: wJalrXUtnFEMI/K7MDENG/bPxRfiCYEXAMPLEKEY
6. キーペアをダウンロードするには、[Download .csv file.csv (.csv ファイルのダウンロード)] を選択します。このキーは安全な場所に保存してください。

> **Warning**
>
> AWS アカウントを保護するために、これらのキーは厳重に管理し、組織外の誰とも共有しないでください。

関連トピック

- 「IAM ユーザーガイド」の「IAM とは」。
- 「Amazon Web Services 全般的なリファレンス」の「AWS セキュリティの認証情報」。

オペレーションを呼び出す

SDK をインストールした後、Go アプリケーションに AWS パッケージをインポートすることで SDK を使用できます。次の例では、AWS、Config、および Amazon S3 ライブラリをインポートしています。SDK パッケージをインポートした後、AWS SDK の共有設定がロードされ、クライアントが作成されて、API オペレーションが呼び出されます。

```
package main

import (
    "context"
    "log"
    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/s3"
)

func main() {
    // Load the Shared AWS Configuration (~/.aws/config)
    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Fatal(err)
    }

    // Create an Amazon S3 service client
    client := s3.NewFromConfig(cfg)

    // Get the first page of results for ListObjectsV2 for a bucket
    output, err := client.ListObjectsV2(context.TODO(), &s3.ListObjectsV2Input{
        Bucket: aws.String("amzn-s3-demo-bucket"),
    })
    if err != nil {
        log.Fatal(err)
    }

    log.Println("first page results")
```

```
    for _, object := range output.Contents {
        log.Printf("key=%s size=%d", aws.ToString(object.Key), *object.Size)
    }
}
```

SDK を設定

AWS SDK for Go V2 では、ロガー、ログレベル、再試行設定など、サービスクライアントの一般的な設定を行うことができます。ほとんどの設定はオプションです。ただし、サービスクライアントごとに、 AWS リージョンと認証情報を指定する必要があります。SDK はこれらの値を使用して、正しいリージョンにリクエストを送信し、正しい認証情報でリクエストに署名します。これらの値は、コード内でプログラムで指定することも、実行環境から取得することもできます。

AWS 共有設定ファイルのロード

サービス API クライアントを初期化する方法はいくつかありますが、次に示すのはユーザーに推奨される最も一般的なパターンです。

AWS 共有設定ファイルを使用するように SDK を設定するには、次のコードを使用します。

```
import (
  "context"
  "log"
  "github.com/aws/aws-sdk-go-v2/config"
)

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
  log.Fatalf("failed to load configuration, %v", err)
}
```

`config.LoadDefaultConfig(context.TODO())` は、 AWS 共有設定ソースを使用して aws.Config を構築します。これには、認証情報プロバイダーの設定、 AWS リージョンの設定、サービス固有の設定のロードが含まれます。ロードされた `aws.Config` を使用してサービスクライアントを作成することで、クライアントの作成方法に一貫性を持たせることができます。

AWS 共有設定ファイルの詳細については、「SDK およびツールリファレンスガイド」の「設定」を参照してください。 AWS SDKs

AWS リージョンの指定

リージョンを指定するときは、us-west-2 や us-east-2 など、リクエストの送信先を指定します。各サービスのリージョンのリストについては、「 Amazon Web Services 全般のリファレンス」の「サービスエンドポイントとクォータ」を参照してください。

SDK にはデフォルトのリージョンはありません。リージョンを指定するには:

- AWS_REGION 環境変数を設定して、デフォルトのリージョンを指定します。
- 設定のロード時に config.LoadDefaultConfig に config.WithRegion を引数として渡して、明示的にリージョンを設定します。

注: これらすべての方法でリージョンを設定した場合、SDK は明示的に指定したリージョンを使用します。

環境変数を使用してリージョンを設定する

Linux、macOS、または Unix

```
export AWS_REGION=us-west-2
```

Server

```
set AWS_REGION=us-west-2
```

リージョンをプログラムで指定する

```
cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithRegion("us-west-2"))
```

認証情報の指定

には、リクエストに署名するための認証情報 (アクセスキーとシークレットアクセスキー) AWS SDK for Go が必要です AWS。特定のユースケースに応じて、認証情報をいくつかの場所で指定できます。認証情報の取得については、「AWS SDK for Go の開始方法」を参照してください。

を使用してaws.Configインスタンスを初期化するとconfig.LoadDefaultConfig、SDK はデフォルトの認証情報チェーンを使用して AWS 認証情報を検索します。このデフォルトの認証情報チェーンは、次の順序で認証情報を検索します。

1. 環境変数。
    1. 静的な認証情報 (`AWS_ACCESS_KEY_ID`、`AWS_SECRET_ACCESS_KEY`、`AWS_SESSION_TOKEN`)
    2. ウェブ ID トークン (`AWS_WEB_IDENTITY_TOKEN_FILE`)
2. 共有設定ファイル。
    1. SDK は、ユーザーのコンピュータのホームフォルダ内にある `.aws` フォルダ下の `credentials` ファイルを共有設定ファイルのデフォルトとして使用します。
    2. SDK は、ユーザーのコンピュータのホームフォルダ内にある `.aws` フォルダ下の `config` ファイルを共有設定ファイルのデフォルトとして使用します。
3. アプリケーションが Amazon ECS タスク定義または RunTask API オペレーションを使用している場合は、タスクの IAM ロール。
4. アプリケーションが Amazon EC2 インスタンスで動作している場合は、Amazon EC2 の IAM ロール。

SDK は、これらの組み込みプロバイダーを自動的に検出して使用するため、手動での設定は不要です。例えば、Amazon EC2 インスタンスの IAM ロールを使用している場合、アプリケーションは自動的にそのインスタンスの認証情報を使用します。アプリケーション側で認証情報を手動で設定する必要はありません。

ベストプラクティスとして、 では、次の順序で認証情報を指定 AWS することをお勧めします。

1. アプリケーションが Amazon ECS のタスク定義または RunTask API オペレーションを使用している場合は、タスクの IAM ロールを使用します。
2. アプリケーションが Amazon EC2 インスタンスで動作している場合は、Amazon EC2 の IAM ロールを使用します。

   IAM ロールは、 AWS 呼び出しを行うための一時的なセキュリティ認証情報をインスタンスでアプリケーションに提供します。また IAM ロールは、複数の Amazon EC2 インスタンスに認証情報を分散して管理するための簡単な方法を提供します。
3. 共有認証情報または設定ファイルを使用します。

   これらの認証情報と設定ファイルは、他の AWS SDK や AWS CLIと共有されます。セキュリティのベストプラクティスとして、アクセスキー ID やシークレットキーなどの機密情報は認証情報ファイルで設定することをお勧めします。これらの各ファイルのフォーマット要件は次のとおりです。
4. 環境変数を使用します。

Amazon EC2 インスタンス以外のマシンで開発作業を行う場合は、環境変数を設定すると便利です。

タスク用の IAM ロール

アプリケーションが Amazon ECS タスク定義または RunTask オペレーションを使用している場合は、タスクの IAM ロールを使用して、タスクのコンテナで使用できる IAM ロールを指定します。

Amazon EC2 インスタンスの IAM ロール

Amazon EC2 インスタンスでアプリケーションを実行している場合は、そのインスタンスの IAM ロールを利用して、 AWSへの呼び出しに使用する一時的なセキュリティ認証情報を取得します。

IAM ロールを使用するようにインスタンスを設定している場合、SDK はその認証情報を自動的に使用してアプリケーションを認証します。これらの認証情報を手動で指定する必要はありません。

共有認証情報と設定

共有認証情報と設定ファイルは、 AWS SDKs やその他のツール間で共通の設定を共有するために使用できます。ツールやアプリケーションごとに異なる認証情報を使用している場合は、プロファイルを使用して複数のアクセスキーを同じ設定ファイル内に設定できます。

config.LoadOptions を使用して複数の認証情報ファイルや設定ファイルの場所を指定できますが、SDK はデフォルトで、「認証情報の指定」に記載されている既定の場所に保存されたファイルをロードします。

```
import (
    "context"
    "github.com/aws/aws-sdk-go-v2/config"
)

// ...

cfg , err := config.LoadDefaultConfig(context.TODO(),
    config.WithSharedCredentialsFiles(
    []string{"test/credentials", "data/credentials"},
    ),
    config.WithSharedConfigFiles(
        []string{"test/config", "data/config"},
```

```
    )
)
```

共有認証情報ファイルと設定ファイルを使用する場合、同じプロファイルが複数定義されていると、それらはマージされてプロファイルが解決されます。マージの競合が発生した場合:

1. 同じ認証情報/設定ファイル内でプロファイルが重複している場合は、後に記述されたプロファイルのプロパティが優先されます。
2. 複数の認証情報ファイルまたは複数の設定ファイル間でプロファイルが重複している場合は、config.LoadOptions に渡されたファイルの順序に基づいて、後のファイルのプロパティが優先されます。後のファイルのプロパティが優先されます。
3. 認証情報ファイルと設定ファイルの両方に同じプロファイルが存在する場合は、認証情報ファイルのプロパティが優先されます。

必要に応じて、config.LoadOptions で LogConfigurationWarnings を有効にして、プロファイル解決の手順をログに記録することもできます。

認証情報ファイルの作成

共有認証情報ファイル (.aws/credentials) がない場合は、任意のテキストエディタを使用してホームディレクトリ内に作成できます。認証情報ファイルに次の内容を追加し、*<YOUR_ACCESS_KEY_ID>* と *<YOUR_SECRET_ACCESS_KEY>* を実際の認証情報に置き換えます。

```
[default]
aws_access_key_id = <YOUR_ACCESS_KEY_ID>
aws_secret_access_key = <YOUR_SECRET_ACCESS_KEY>
```

[default] 見出しは、デフォルトプロファイルの認証情報を定義します。別のプロファイルを使用するように設定していない限り、SDK はこのデフォルトプロファイルを使用します。

次の例のように、セッショントークンをプロファイルに追加することで、一時的なセキュリティ認証情報を使用することもできます。

```
[temp]
aws_access_key_id = <YOUR_TEMP_ACCESS_KEY_ID>
aws_secret_access_key = <YOUR_TEMP_SECRET_ACCESS_KEY>
aws_session_token = <YOUR_SESSION_TOKEN>
```

認証情報ファイル内のデフォルト以外のプロファイルのセクション名は、profile という単語で始めることはできません。詳細については、「AWS SDK とツールのリファレンスガイド」を参照してください。

設定ファイルの作成

共有認証情報ファイル (.aws/config) がない場合は、任意のテキストエディタを使用してホームディレクトリ内に作成できます。次の内容を設定ファイルに追加し、*<REGION>* を必要なリージョンに置き換えます。

```
[default]
region = <REGION>
```

[default] 見出しは、デフォルトプロファイルの設定を定義します。別のプロファイルを使用するように設定していない限り、SDK はこのデフォルトプロファイルを使用します。

次の例のように、名前付きプロファイルを使用することもできます。

```
[profile named-profile]
region = <REGION>
```

設定ファイル内のデフォルト以外のプロファイルのセクション名は、必ず profile という単語で始まり、その後に目的のプロファイル名が続く必要があります。詳細については、「AWS SDK とツールのリファレンスガイド」を参照してください。

プロファイルの指定

アクセスキーの各セットをプロファイルに関連付けることで、同じ設定ファイルに複数のアクセスキーを含めることができます。例えば、認証情報ファイルでは、次のように複数のプロファイルを宣言できます。

```
[default]
aws_access_key_id = <YOUR_DEFAULT_ACCESS_KEY_ID>
aws_secret_access_key = <YOUR_DEFAULT_SECRET_ACCESS_KEY>

[test-account]
aws_access_key_id = <YOUR_TEST_ACCESS_KEY_ID>
aws_secret_access_key = <YOUR_TEST_SECRET_ACCESS_KEY>

[prod-account]
```

```
; work profile
aws_access_key_id = <YOUR_PROD_ACCESS_KEY_ID>
aws_secret_access_key = <YOUR_PROD_SECRET_ACCESS_KEY>
```

デフォルトでは、SDK は AWS_PROFILE 環境変数を確認して、使用するプロファイルを決定します。AWS_PROFILE 変数が設定されていない場合、SDK は defaultプロファイルを使用します。

アプリケーションで別のプロファイルを使用する場合もあります。例えば、test-account アプリケーションで myapp 認証情報を使用する場合です。このようなプロファイルを使用するには、次のコマンドを実行します。

```
$ AWS_PROFILE=test-account myapp
```

また、SDK がプロファイルを選択するようにするには、config.LoadDefaultConfig を呼び出す前に os.Setenv("AWS_PROFILE", "test-account") を呼び出すか、次の例のように明示的にプロファイルを引数として渡します。

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
    config.WithSharedConfigProfile("test-account"))
```

> **Note**
>
> 環境変数で認証情報を指定している場合は、どのプロファイルを指定していても、SDK は常にその環境変数の認証情報を使用します。

環境可変

デフォルトでは、SDK は環境で設定された AWS 認証情報を検出し、それらを使用してリクエストに署名します AWS。この方法では、アプリケーションで認証情報を管理する必要はありません。

SDK は次の環境変数から認証情報を検索します。

- AWS_ACCESS_KEY_ID
- AWS_SECRET_ACCESS_KEY
- AWS_SESSION_TOKEN (オプション)

次の例では、環境変数の設定方法を示しています。

Linux、OS X、Unix

```
$ export AWS_ACCESS_KEY_ID=YOUR_AKID
$ export AWS_SECRET_ACCESS_KEY=YOUR_SECRET_KEY
$ export AWS_SESSION_TOKEN=TOKEN
```

Server

```
> set AWS_ACCESS_KEY_ID=YOUR_AKID
> set AWS_SECRET_ACCESS_KEY=YOUR_SECRET_KEY
> set AWS_SESSION_TOKEN=TOKEN
```

認証情報をプログラムで指定する

`config.LoadDefaultConfig` では、共有設定ソースをロードするときに、明示的な aws.CredentialProvider を指定できます。共有設定をロードするときに明示的な認証情報プロバイダーを渡すには、config.WithCredentialsProvider を使用します。例えば、`customProvider` が `aws.CredentialProvider` 実装のインスタンスを参照している場合、次のように設定のロード時に渡すことができます。

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
    config.WithCredentialsProvider(customProvider))
```

この例のように、明示的に認証情報を指定した場合、SDK はその認証情報のみを使用します。

> **Note**
>
> `LoadDefaultConfig` との間で受け渡しされるすべての認証情報プロバイダーは CredentialsCache に自動的にラップされます。これにより、スレッドセーフなキャッシュと認証情報のローテーションが可能になります。`aws.Config` でプロバイダーを直接明示的に設定する場合は、NewCredentialsCache を使用してそのプロバイダーをこの型で明示的にラップする必要があります。

静的な認証情報

credentials.NewStaticCredentialsProvider 認証プロバイダーを利用して、使用するアクセスキーを明示的に設定することで、アプリケーションに認証情報をハードコードすることもできます。例えば、次のようになります。

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
    config.WithCredentialsProvider(credentials.NewStaticCredentialsProvider("AKID",
 "SECRET_KEY", "TOKEN")),
)
```

> **Warning**
>
> ただし、アプリケーション内に認証情報を埋め込まないでください。この方法はテスト目的にのみ使用してください。

シングルサインオン認証情報

SDK は、 を使用して一時的な認証情報を取得するための AWS 認証情報プロバイダーを提供します AWS IAM アイデンティティセンター。を使用して AWS CLI、 AWS アクセスポータルで認証し、一時的な AWS 認証情報へのアクセスを許可します。次に、シングルサインオン (SSO) プロファイルをロードするようにアプリケーションを設定します。SDK は SSO 認証情報を使用して一時的な AWS 認証情報を取得し、有効期限が切れると自動的に更新されます。SSO 認証情報の有効期限が切れた場合は、 を使用して IAM Identity Center アカウントに再度ログインして、明示的に更新する必要があります AWS CLI。

たとえば、プロファイルを作成し、 `dev-profile`を使用してそのプロファイルを認証および認可し AWS CLI、以下に示すようにアプリケーションを設定できます。

1. まず、`profile` と `sso-session` を作成します。

```
[profile dev-profile]
sso_session = dev-session
sso_account_id = 012345678901
sso_role_name = Developer
region = us-east-1

[sso-session dev-session]
sso_region = us-west-2
sso_start_url = https://company-sso-portal.awsapps.com/start
sso_registration_scopes = sso:account:access
```

2. を使用してログイン AWS CLI し、SSO プロファイルを認証および認可します。

```
$ aws --profile dev-profile sso login
Attempting to automatically open the SSO authorization page in your default browser.
If the browser does not open or you wish to use a different device to authorize this
 request, open the following URL:

https://device.sso.us-west-2.amazonaws.com/

Then enter the code:

ABCD-EFGH
Successully logged into Start URL: https://company-sso-portal.awsapps.com/start
```

3. その後、SSO プロファイルを使用するようにアプリケーションを設定します。

```
import "github.com/aws/aws-sdk-go-v2/config"

// ...

cfg, err := config.LoadDefaultConfig(
    context.Background(),
    config.WithSharedConfigProfile("dev-profile"),
)
if err != nil {
    return err
}
```

SSO プロファイルの設定と を使用した認証の詳細については、 ユーザーガイドの「 を使用する AWS CLI ように AWS IAM アイデンティティセンターを設定する AWS CLI 」を参照してください。AWS CLI SSO 認証情報プロバイダーをプログラムで作成する方法の詳細については、「ssocreds API リファレンスドキュメント」を参照してください。

ログイン認証情報

既存の AWS マネジメントコンソールのサインイン認証情報を使用して、 AWS サービスにプログラムでアクセスできます。ブラウザベースの認証フローの後、 は CLI AWS Tools for PowerShell や AWS SDKs AWS などのローカル開発ツールで動作する一時的な認証情報 AWS を生成します。この機能は、特に長期的なアクセスキーの管理よりもインタラクティブな認証を希望する場合に、CLI AWS 認証情報の設定と管理のプロセスを簡素化します。

1. AWS CLI を使用してログインフローを開始し、ブラウザのプロンプトに従います。この例では、ログインセッションを新しいプロファイル に保存しますがdev-profile、これはオプションです。

```
$ aws --profile dev-profile login
```

2. (オプション) AWS 共有設定ファイルを調べて、セッションが確立されたことを確認します。

```
[profile dev-profile]
login_session = arn:aws:sts::account id>:role
```

3. 次に、ログインプロファイルを使用するようにアプリケーションを設定します。

```
import "github.com/aws/aws-sdk-go-v2/config"

// ...

cfg, err := config.LoadDefaultConfig(
    context.Background(),
    // only necessary if login session is saved to a non-default profile
    config.WithSharedConfigProfile("dev-profile"),
)
if err != nil {
    return err
}
```

ログインプロファイルの設定と CLI AWS を使用した認証の詳細については、「コンソール認証情報を使用した AWS ローカル開発のログイン」を参照してください。

その他の認証情報プロバイダー

SDK には、credentials モジュール内で他にもさまざまな認証情報取得方法が提供されています。たとえば、 から一時的なセキュリティ認証情報を取得 AWS Security Token Service したり、暗号化されたストレージから認証情報を取得したりできます。

使用可能な認証情報プロバイダー:

- ec2rolecreds – Amazon EC2 IMDS 経由で、Amazon EC2 インスタンスロールから認証情報を取得します。
- endpointcreds – 任意の HTTP エンドポイントから認証情報を取得します。

- processcreds – ホスト環境のシェルで実行される外部プロセスから認証情報を取得します。
- stscreds – から認証情報を取得する AWS STS

認証を設定する

AWS SDK for Go には、認証動作サービスを設定する機能が用意されています。ほとんどの場合、デフォルト設定で十分ですが、カスタム認証を設定すると、プレリリースサービス機能の使用など追加の動作が可能になります。

定義

このセクションでは、AWS SDK for Go での認証ロジックの構成要素の概要を示します。

AuthScheme

AuthScheme は、オペレーションリクエストに呼び出し元の ID をアタッチするワークフローを、SDK 内で定義するインターフェイスです。

認証スキームでは、次の構成要素を使用します (詳細は後述)。

- スキームを識別する一意の ID
- 署名プロセスで使用される呼び出し元 ID (AWS 認証情報など) を返す ID リゾルバー
- 署名ロジック。呼び出し元の ID をオペレーションのトランスポートリクエストに実際に挿入します (例: `Authorization` HTTP ヘッダー)

各サービスクライアントのオプションには `AuthSchemes` フィールドが含まれており、デフォルトではそのサービスでサポートされている認証スキームのリストが入力されています。

AuthSchemeResolver

各サービスクライアントのオプションには `AuthSchemeResolver` フィールドが含まれています。このインターフェイスはサービスごとに定義され、各オペレーションで使用可能な認証オプションを決定するために SDK によって呼び出される API です。

> **Important**
>
> 認証スキームリゾルバーは、使用する認証スキームを決定するものではありません。代わりに、使用可能なスキームのリスト (「Options」) を返し、最終的なスキームはこちらで説明している固定アルゴリズムによって選択されます。

オプション

`ResolverAuthSchemes` を呼び出した結果として返される Option は、認証の候補オプションを表します。

Option は 3 つの情報セットで構成されます。

- 使用可能なスキームを表す ID
- スキームの ID リゾルバーに渡される不透明なプロパティの集合
- スキームの署名ロジックに渡される不透明なプロパティの集合

プロパティに関する注意事項

ほとんど (99%) のユースケースでは、呼び出し元は ID 解決および署名のための不透明なプロパティを意識する必要はありません。SDK は各スキームに必要なプロパティを自動的に抽出し、SDK で公開している厳密に型付けされたインターフェイスに渡します。例えば、サービスごとのデフォルトの認証リゾルバーは、SigV4 オプションに「署名名」と「リージョン」の情報を含む署名ロジックプロパティをエンコードします。これらの値は、SigV4 が選択されたときに、クライアントに設定された v4.HTTPSigner 実装に渡されます。

ID

Identity は、SDK の呼び出し元を抽象的に表すものです。

SDK で最も一般的に使用される Identity の型は `aws.Credentials` です。ほとんどのユースケースでは、呼び出し元は `Identity` という抽象型を意識せず、具体的な型をそのまま扱うことができます。

> **Note**
>
> 下位互換性の維持と API の混乱防止のため、AWS SDK 固有の Identity の型 `aws.Credentials` は、`Identity` インターフェイスを直接実装していません。このマッピングは内部で処理されます。

IdentityResolver

IdentityResolver は、`Identity` を取得するためのインターフェイスです。

`IdentityResolver` の具体的な実装は、SDK に厳密な型付き形式で含まれており (aws.CredentialsProvider など)、これらのマッピングは SDK が内部で処理します。

呼び出し元は、外部の認証スキームを定義する場合にのみ、`IdentityResolver` インターフェイスを直接実装する必要があります。

Signer

Signer は、取得された呼び出し元の `Identity` をリクエストに追加するためのインターフェイスです。

`Signer` の具体的な実装は、SDK に厳密な型付き形式で含まれており (v4.HTTPSigner など)、これらのマッピングは SDK が内部で処理します。

呼び出し元は、外部の認証スキームを定義する場合にのみ、`Signer` インターフェイスを直接実装する必要があります。

AuthResolverParameters

各サービスは、それぞれ専用の入力値セットを受け取り、それを `AuthResolverParameters` としてサービスパッケージ内で定義された解決関数に渡します。

基本的なリゾルバーパラメータは次のとおりです。

名前	type	description
`Operation`	`string`	呼び出されるオペレーションの名前。

名前	type	description
`Region`	`string`	クライアントの AWS リージョン。SigV4[A] を使用するサービスでのみ存在します。

独自のリゾルバーを実装する場合でも、これらのパラメータのインスタンスを自分で作成する必要はありません。SDK がリクエストごとにこれらの値を取得し、カスタム実装に渡します。

認証スキームの解決ワークフロー

SDK 経由で AWS サービスのオペレーションを呼び出すと、リクエストのシリアル化後に次の一連のアクションが実行されます。

1. SDK はクライアントの `AuthSchemeResolver.ResolveAuthSchemes()` API を呼び出して必要な入力パラメータを取得して、そのオペレーションで使用可能な Options のリストを取得します。
2. SDK はそのリストを反復処理し、次の条件を満たす最初のスキームを選択します。
   - ID が一致するスキームがクライアント自身の `AuthSchemes` リストに存在する
   - スキームの ID リゾルバーがクライアントのオプション内に存在する (`nil` でない) (このチェックはスキームの `GetIdentityResolver` メソッドを通じて行われ、前述の具体的な ID リゾルバー型へのマッピングは内部で処理されます) (1)
3. 有効なスキームが選択されると、SDK はその `GetIdentityResolver()` API を呼び出して呼び出し元の ID を取得します。例えば、組み込みの SigV4 認証スキームは、クライアントの `Credentials` プロバイダーに内部でマッピングされます。
4. SDK は ID リゾルバーの `GetIdentity()` (例: SigV4 の場合は `aws.CredentialProvider.Retrieve()`) を呼び出します。
5. SDK はエンドポイントリゾルバーの `ResolveEndpoint()` を呼び出して、リクエストのエンドポイントを見つけます。このエンドポイントには、署名プロセスに影響する追加のメタデータ (S3 Object Lambda 用の一意の署名名など) が含まれている場合があります。
6. SDK は認証スキームの `Signer()` API を呼び出して署名ロジックを取得し、その `SignRequest()` API を使用して、取得済みの呼び出し元の ID でリクエストに署名します。

(1) SDK がリスト内で匿名オプション (ID `smithy.api#noAuth`) を検出した場合、対応する ID リゾルバーがないため、自動的にそのオプションが選択されます。

ネイティブでサポートされている AuthScheme

次の認証スキームは AWS SDK for Go でネイティブにサポートされています。

名前	スキーム ID	ID リゾルバー	Signer	メモ
SigV4	aws.auth#sigv4	aws.CredentialsProvider	v4.HTTPSigner	現時点でほとんどの AWS サービスオペレーションで使用されるデフォルトです。
SigV4A	aws.auth#sigv4a	aws.CredentialsProvider	該当なし	SigV4A の使用は現時点では限定的であり、署名ロジックの実装は内部的なものです。HTTP リクエストに署名するための汎用 API を公開する新しいオプトインモジュール aws-http-auth については、こちらのお知らせを参照してください。
SigV4Express	com.amazonaws.s3#sigv4express	s3.ExpressCredentialsProvider	v4.HTTPSigner	Express One Zone に使用されます。

名前	スキーム ID	ID リゾルバー	Signer	メモ
HTTP Bearer	`smithy.api#httpBearerAuth`	smithybearer.TokenProvider	smithybearer.Signer	codecatalyst によって使用されます。
Anonymous	`smithy.api#noAuth`	該当なし	該当なし	認証なし - ID は不要で、リクエストは署名も認証もされません。

ID の設定

AWS SDK for Go では、認証スキームの ID 構成要素は SDK クライアントの `Options` で設定されます。SDK は、オペレーションが呼び出されたときに選択したスキームに対して、これらの構成要素の値を自動的に取得して使用します。

> **Note**
>
> 下位互換性の理由から、ID リゾルバーが設定されていない場合、SDK は匿名認証スキームの使用を暗黙的に許可します。これは、クライアントの `Options` にあるすべての ID リゾルバーを `nil` に設定することで手動でも可能です (sigv4 の ID リゾルバーを `aws.AnonymousCredentials{}` に設定することもできます)。

Signer の設定

AWS SDK for Go では、認証スキームの署名ロジック構成要素は SDK クライアントの `Options` で設定されます。SDK は、オペレーションが呼び出されたときに選択したスキームに対して、これらの構成要素の値を自動的に取得して使用します。追加の設定は不要です。

カスタム認証スキーム

カスタム認証スキームを定義して使用するには、呼び出し元で以下を行う必要があります。

1. AuthScheme 実装を定義する
2. そのスキームを SDK クライアントの `AuthSchemes` リストに登録する

3. SDK クライアントの `AuthSchemeResolver` を調整して、必要に応じてスキーム ID を含む auth `Option` を返すようにします。

> **Warning**
>
> 次のサービスでは、独自またはカスタムの認証動作が実装されています。カスタム認証動作が必要な場合は、まずはデフォルト実装に処理を委譲し、その上で適切にラップしてカスタマイズすることをお勧めします。

サービス	メモ
S3	オペレーションの入力に応じて SigV4A および SigV4Express を条件付きで使用。
EventBridge	オペレーションの入力に応じて SigV4A を条件付きで使用。
Cognito	一部のオペレーションは匿名専用。
SSO	一部のオペレーションは匿名専用。
STS	一部のオペレーションは匿名専用。

クライアントエンドポイントを設定する

> **Warning**
>
> エンドポイントの解決は上級者向けの SDK トピックです。これらの設定を変更すると、コードが動作しなくなる可能性があります。デフォルト設定は、本番環境のほとんどのユーザーに適しています。

AWS SDK for Go は、サービスに使用するカスタムエンドポイントを設定する機能を提供します。ほとんどの場合、デフォルトの設定で十分です。カスタムエンドポイントを設定することで、サービスのプレリリースバージョンとの連携など、追加の動作が可能になります。

カスタマイズ

SDK では、エンドポイント解決の設定に 2 つの「バージョン」があります。

- v2。2023 年第 3 四半期にリリース。以下で設定:
  - EndpointResolverV2
  - BaseEndpoint
- v1。SDK と同時にリリース。以下で設定:
  - EndpointResolver

新しいエンドポイント関連のサービス機能にアクセスできるようにするため、v1 エンドポイント解決のユーザーは v2 に移行することをお勧めします。

V2: **EndpointResolverV2** + **BaseEndpoint**

エンドポイント解決 v2 では、EndpointResolverV2 がエンドポイント解決の決定的なメカニズムです。リゾルバーの ResolveEndpoint メソッドは、SDK で行うすべてのリクエストのワークフローの一部として呼び出されます。リゾルバーが返す Endpoint のホスト名はリクエスト時にそのまま使用されます (ただし、オペレーションシリアライザが HTTP パスに追記することはできます)。

エンドポイント解決 v2 では、クライアントレベルの追加設定 BaseEndpoint が含まれており、サービスインスタンスの「ベース」ホスト名を指定するために使用されます。ここで設定された値は決定的なものではなく、最終的にはクライアントの EndpointResolverV2 にパラメータとして渡され、最終解決に使用されます (EndpointResolverV2 パラメータの詳細については後述)。その後、リゾルバーの実装により、この値が検査 (場合によっては変更) されて、最終的なエンドポイントが決定されます。

例えば、BaseEndpoint を指定したクライアントで、特定のバケットに対して S3 GetObject リクエストを実行する場合、デフォルトのリゾルバーは、バケットが仮想ホスト対応であればホスト名にバケット名を挿入します (クライアント設定で仮想ホスティングを無効にしていない場合)。

実際には、BaseEndpoint はほとんどの場合、クライアントの接続先を開発インスタンスやプレビューインスタンスに指定するために使用されます。

EndpointResolverV2 個のパラメータ

各サービスは、それぞれ専用の入力値セットを受け取り、それを EndpointParameters としてサービスパッケージ内で定義された解決関数に渡します。

すべてのサービスには、 AWS内での一般的なエンドポイント解決を容易にする次の基本パラメータが含まれています。

名前	型	説明
`Region`	`string`	クライアントの AWS リージョン
`Endpoint`	`string`	クライアント設定での `BaseEndpoint` の値
`UseFips`	`bool`	クライアント設定で FIPS エンドポイントが有効かどうか
`UseDualStack`	`bool`	クライアント設定でデュアルスタックエンドポイントが有効かどうか

サービスは、エンドポイント解決に必要な追加のパラメータを指定できます。例えば、S3 の `EndpointParameters` にはバケット名や、仮想ホストアドレッシングが有効かどうかなど、S3 固有の機能設定が含まれます。

独自の `EndpointResolverV2` を実装する場合でも、`EndpointParameters` のインスタンスを自分で作成する必要はありません。SDK がリクエストごとにそれらの値を取得し、カスタム実装に渡します。

Amazon S3 に関する注意事項

Amazon S3 は、バケットの仮想ホスティングや S3 MRAP など、複雑なエンドポイントのカスタマイズによって多くの機能が設計されている高度なサービスです。

このため、S3 クライアントの `EndpointResolverV2` 実装を置き換えないことをお勧めします。エンドポイントの追加設定を行ったローカル開発スタックにリクエストを送信するなど、解決動作を拡張する場合は、デフォルトの実装をラップし、その中で必要に応じて元の実装に処理を委譲 (フォールバック) することをお勧めします (以下の例を参照)。

例

BaseEndpoint の場合

次のコードスニペットでは、S3 クライアントの接続先をローカルのサービスインスタンス (この例ではループバックデバイスのポート 8080) に指定する方法を示しています。

```
client := s3.NewFromConfig(cfg, func (o *svc.Options) {
    o.BaseEndpoint = aws.String("https://localhost:8080/")
})
```

EndpointResolverV2 の場合

次のコードスニペットでは、EndpointResolverV2 を使用して S3 のエンドポイント解決にカスタム動作を挿入する方法を示しています。

```
import (
    "context"
    "net/url"

    "github.com/aws/aws-sdk-go-v2/service/s3"
    smithyendpoints "github.com/aws/smithy-go/endpoints"
)

type resolverV2 struct {
    // you could inject additional application context here as well
}

func (*resolverV2) ResolveEndpoint(ctx context.Context, params s3.EndpointParameters) (
        smithyendpoints.Endpoint, error,
    ) {
    if /* input params or caller context indicate we must route somewhere */ {
        u, err := url.Parse("https://custom.service.endpoint/")
        if err != nil {
            return smithyendpoints.Endpoint{}, err
        }
        return smithyendpoints.Endpoint{
            URI: *u,
        }, nil
    }

    // delegate back to the default v2 resolver otherwise
    return s3.NewDefaultEndpointResolverV2().ResolveEndpoint(ctx, params)
```

```
}

func main() {
    // load config...

    client := s3.NewFromConfig(cfg, func (o *s3.Options) {
        o.EndpointResolverV2 = &resolverV2{
            // ...
        }
    })
}
```

両方を使用

次のサンプルプログラムでは、BaseEndpoint と EndpointResolverV2 の相互動作を示しています。これは、高度なユースケースです。

```
import (
    "context"
    "fmt"
    "log"
    "net/url"

    "github.com/aws/aws-sdk-go-v2"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/s3"
    smithyendpoints "github.com/aws/smithy-go/endpoints"
)

type resolverV2 struct {}

func (*resolverV2) ResolveEndpoint(ctx context.Context, params s3.EndpointParameters) (
        smithyendpoints.Endpoint, error,
    ) {
    // s3.Options.BaseEndpoint is accessible here:
    fmt.Printf("The endpoint provided in config is %s\n", *params.Endpoint)

    // fallback to default
    return s3.NewDefaultEndpointResolverV2().ResolveEndpoint(ctx, params)
}

func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
```

```
    if (err != nil) {
        log.Fatal(err)
    }

    client := s3.NewFromConfig(cfg, func (o *s3.Options) {
        o.BaseEndpoint = aws.String("https://endpoint.dev/")
        o.EndpointResolverV2 = &resolverV2{}
    })

    // ignore the output, this is just for demonstration
    client.ListBuckets(context.Background(), nil)
}
```

このプログラムを実行すると、次の出力が得られます。

```
The endpoint provided in config is https://endpoint.dev/
```

V1: `EndpointResolver`

> **Warning**
>
> エンドポイント解決 v1 は下位互換性のために保持されており、v2 の最新の動作とは分離されています。呼び出し元が `EndpointResolver` フィールドを設定した場合にのみ使用されます。
> v1 を使用すると、v2 リリース以降に導入されたエンドポイント関連のサービス機能にアクセスできなくなる可能性が高くなります。アップグレード方法の手順については、「移行」を参照してください。

EndpointResolver を設定することで、サービスクライアントにカスタムエンドポイント解決ロジックを提供できます。カスタムエンドポイントリゾルバーを使用して、すべてのエンドポイント、または特定のリージョンエンドポイントに対して、サービスのエンドポイント解決ロジックをオーバーライドできます。カスタムエンドポイントリゾルバーが、あるエンドポイントの解決を行わない場合 (意図的にスキップする場合など)、サービスのエンドポイント解決ロジックにフォールバックさせることができます。EndpointResolverWithOptionsFunc を使用すると、関数を簡単にラップして `EndpointResolverWithOptions` インターフェイスを実装できます。

`EndpointResolver` は、WithEndpointResolverWithOptions でラップされたリゾルバーを LoadDefaultConfig に渡すことで簡単に設定でき、認証情報のロード時にエンドポイントをオーバー

ライドしたり、結果として得られる aws.Config にカスタムエンドポイントリゾルバーを設定したりできます。

エンドポイントリゾルバーにはサービス名とリージョンが文字列として渡されるため、リゾルバーはその動作を動的に制御できます。各サービスクライアントパッケージには、どのサービスクライアントがエンドポイントリゾルバーを呼び出しているかを特定するための ServiceID 定数がエクスポートされています。

エンドポイントリゾルバーは、EndpointNotFoundError のセンチネルエラー値を使用して、サービスクライアントのデフォルト解決ロジックにフォールバックさせます。これにより、フォールバックロジックを個別に扱うことなく、1 つ以上のエンドポイントを選択的にシームレスにオーバーライドできます。

エンドポイントリゾルバーが EndpointNotFoundError 以外のエラーを返した場合、エンドポイント解決は停止し、サービスオペレーションはアプリケーションにエラーを返します。

例

フォールバックあり

DynamoDB の 1 つのサービスエンドポイントをオーバーライドし、他のエンドポイントにはフォールバック動作を適用する方法を示すコードスニペットです。

```
customResolver := aws.EndpointResolverWithOptionsFunc(func(service, region string,
 options ...interface{}) (aws.Endpoint, error) {
    if service == dynamodb.ServiceID && region == "us-west-2" {
        return aws.Endpoint{
            PartitionID:   "aws",
            URL:           "https://test.us-west-2.amazonaws.com",
            SigningRegion: "us-west-2",
        }, nil
    }
    // returning EndpointNotFoundError will allow the service to fallback to it's
 default resolution
    return aws.Endpoint{}, &aws.EndpointNotFoundError{}
})

cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithEndpointResolverWithOptions(customResolver))
```

フォールバックなし

DynamoDB の 1 つのサービスエンドポイントをオーバーライドし、他のエンドポイントにはフォールバック動作を適用しない方法を示すコードスニペットです。

```
customResolver := aws.EndpointResolverWithOptionsFunc(func(service, region string,
 options ...interface{}) (aws.Endpoint, error) {
    if service == dynamodb.ServiceID && region == "us-west-2" {
        return aws.Endpoint{
            PartitionID:   "aws",
            URL:           "https://test.us-west-2.amazonaws.com",
            SigningRegion: "us-west-2",
        }, nil
    }
    return aws.Endpoint{}, fmt.Errorf("unknown endpoint requested")
})

cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithEndpointResolverWithOptions(customResolver))
```

変更不可のエンドポイント

> **Warning**
>
> エンドポイントを変更不可として設定すると、一部のサービスクライアント機能が正しく動作しなくなり、未定義の動作が発生する可能性があります。エンドポイントを変更不可として定義する際は注意が必要です。

Amazon S3 などの一部のサービスクライアントでは、特定のサービスオペレーションに対してリゾルバーが返すエンドポイントを変更する場合があります。例えば Amazon S3 では、仮想バケットアドレス指定を自動的に処理するために、解決されたエンドポイントを変更します。HostnameImmutable を `true` に設定することで、SDK がカスタムエンドポイントを変更しないようにできます。例えば、次のようになります。

```
customResolver := aws.EndpointResolverWithOptionsFunc(func(service, region string,
 options ...interface{}) (aws.Endpoint, error) {
    if service == dynamodb.ServiceID && region == "us-west-2" {
        return aws.Endpoint{
            PartitionID:   "aws",
            URL:           "https://test.us-west-2.amazonaws.com",
```

```
            SigningRegion: "us-west-2",
            HostnameImmutable: true,
        }, nil
    }
    return aws.Endpoint{}, fmt.Errorf("unknown endpoint requested")
})

cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithEndpointResolverWithOptions(customResolver))
```

移行

エンドポイント解決を v1 から v2 に移行する際は、次の一般的な原則が適用されます。

- HostnameImmutable を `false` に設定した Endpoint を返すことは、`BaseEndpoint` を v1 から元々返された URL に設定し、`EndpointResolverV2` をデフォルトのままにすることとほぼ同等です。
- HostnameImmutable を `true` に設定した Endpoint を返すことは、v1 から元々返された URL を返す `EndpointResolverV2` を実装することとほぼ同等です。
  - 主な例外は、エンドポイントのプレフィックスがモデルとして定義されているオペレーションに該当する場合です。これに関する注意点は後述します。

これらのケースの例を次に示します。

> **Warning**
>
> v1 の変更不可エンドポイントと v2 の解決ロジックは、動作上は同等ではありません。例えば、S3 Object Lambda などのカスタム機能に対する署名のオーバーライドは、v1 コードで返された変更不可エンドポイントには適用されますが、v2 では適用されません。

ホストプレフィックスに関する注意事項

一部のオペレーションでは、解決されたエンドポイントの前にホストプレフィックスが付加されます。この動作は ResolveEndpointV2 の出力と連携して機能する必要があるため、ホストプレフィックスはその結果に引き続き適用されます。

ミドルウェアを適用することで、エンドポイントホストのプレフィックスを手動で無効にできます (例のセクションを参照)。

例

変更可能なエンドポイント

次のコードサンプルは、変更可能なエンドポイントを返す基本的な v1 エンドポイントリゾルバーをどのように移行するかを示しています。

```
// v1
client := svc.NewFromConfig(cfg, func (o *svc.Options) {
    o.EndpointResolver = svc.EndpointResolverFromURL("https://custom.endpoint.api/")
})

// v2
client := svc.NewFromConfig(cfg, func (o *svc.Options) {
    // the value of BaseEndpoint is passed to the default EndpointResolverV2
    // implementation, which will handle routing for features such as S3 accelerate,
    // MRAP, etc.
    o.BaseEndpoint = aws.String("https://custom.endpoint.api/")
})
```

変更不可のエンドポイント

```
// v1
client := svc.NewFromConfig(cfg, func (o *svc.Options) {
    o.EndpointResolver = svc.EndpointResolverFromURL("https://custom.endpoint.api/",
 func (e *aws.Endpoint) {
        e.HostnameImmutable = true
    })
})

// v2
import (
    smithyendpoints "github.com/aws/smithy-go/endpoints"
)

type staticResolver struct {}

func (*staticResolver) ResolveEndpoint(ctx context.Context, params
 svc.EndpointParameters) (
        smithyendpoints.Endpoint, error,
    ) {
    // This value will be used as-is when making the request.
    u, err := url.Parse("https://custom.endpoint.api/")
```

```
    if err != nil {
        return smithyendpoints.Endpoint{}, err
    }
    return smithyendpoints.Endpoint{
        URI: *u,
    }, nil
}

client := svc.NewFromConfig(cfg, func (o *svc.Options) {
    o.EndpointResolverV2 = &staticResolver{}
})
```

ホストプレフィックスを無効にする

```
import (
    "context"
    "fmt"
    "net/url"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/<service>"
    smithyendpoints "github.com/aws/smithy-go/endpoints"
    "github.com/aws/smithy-go/middleware"
    smithyhttp "github.com/aws/smithy-go/transport/http"
)

// disableEndpointPrefix applies the flag that will prevent any
// operation-specific host prefix from being applied
type disableEndpointPrefix struct{}

func (disableEndpointPrefix) ID() string { return "disableEndpointPrefix" }

func (disableEndpointPrefix) HandleInitialize(
    ctx context.Context, in middleware.InitializeInput, next
 middleware.InitializeHandler,
) (middleware.InitializeOutput, middleware.Metadata, error) {
    ctx = smithyhttp.SetHostnameImmutable(ctx, true)
    return next.HandleInitialize(ctx, in)
}

func addDisableEndpointPrefix(o *<service>.Options) {
    o.APIOptions = append(o.APIOptions, (func(stack *middleware.Stack) error {
```

```
        return stack.Initialize.Add(disableEndpointPrefix{}, middleware.After)
    }))
}

type staticResolver struct{}

func (staticResolver) ResolveEndpoint(ctx context.Context, params
 <service>.EndpointParameters) (
    smithyendpoints.Endpoint, error,
) {
    u, err := url.Parse("https://custom.endpoint.api/")
    if err != nil {
        return smithyendpoints.Endpoint{}, err
    }

    return smithyendpoints.Endpoint{URI: *u}, nil
}


func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        panic(err)
    }

    svc := <service>.NewFromConfig(cfg, func(o *<service>.Options) {
        o.EndpointResolverV2 = staticResolver{}
    })

    _, err = svc.<Operation>(context.Background(), &<service>.<OperationInput>{ /* ...
 */ },
        addDisableEndpointPrefix)
    if err != nil {
        panic(err)
    }
}
```

HTTP クライアントをカスタマイズする

AWS SDK for Go は、デフォルトの設定値を持つ標準の HTTP クライアントを使用します。一部の設定値は変更できますが、高スループットかつ低レイテンシーを要件とする環境で AWS SDK for Go を使用する顧客にとって、標準の HTTP クライアントとトランスポート設定では十分でありませ

ん。設定の推奨事項はワークロードによって異なるため、詳細については「よくある質問」を参照してください。このセクションでは、カスタム HTTP クライアントを設定し、そのクライアントを使用して AWS SDK for Go 呼び出しを作成する方法について説明します。

カスタム HTTP クライアントの作成に役立つように、このセクションでは NewBuildableClient を使用してカスタム設定を行い、そのクライアントを AWS SDK for Go サービスクライアントで使用する方法について説明します。

カスタマイズする内容を定義しましょう。

設定ロード時のオーバーライド

カスタム HTTP クライアントは、LoadDefaultConfig を呼び出す際に、WithHTTPClient でラップして LoadDefaultConfig に渡すことで提供できます。例えば、customClient をクライアントとして渡すには次のようにします。

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithHTTPClient(customClient))
```

タイムアウト

BuildableHTTPClient には、リクエストのタイムアウト制限を設定できます。このタイムアウトには、接続時間、リダイレクトの処理時間、レスポンス本文全体の読み取り時間が含まれます。例えば、クライアントのタイムアウトを変更するには次のようにします。

```
import "github.com/aws/aws-sdk-go-v2/aws/transport/http"

// ...

httpClient := http.NewBuildableClient().WithTimeout(time.Second*5)
```

Dialer

BuildableHTTPClient では、Dialer オプションを変更してクライアントを作成するためのビルダー構造が提供されています。次の例では、クライアントの Dialer 設定を行う方法を示しています。

```
import awshttp "github.com/aws/aws-sdk-go-v2/aws/transport/http"
```

```
import "net"

// ...

httpClient := awshttp.NewBuildableClient().WithDialerOptions(func(d *net.Dialer) {
    d.KeepAlive = -1
    d.Timeout = time.Millisecond*500
})
```

設定

Dialer.KeepAlive

この設定は、アクティブなネットワーク接続のキープアライブ期間を表します。

キープアライブを無効にするには、負の値に設定します。

プロトコルとオペレーティングシステムがサポートしている場合、キープアライブを有効にするには、0 に設定します。

キープアライブをサポートしていないネットワークプロトコルやオペレーティングシステムでは、このフィールドは無視されます。TCP では、デフォルトでキープアライブが有効になっています。

https://golang.org/pkg/net/#Dialer.KeepAlive を参照してください。

`KeepAlive` は time.Duration 型で設定してください。

Dialer.Timeout

この設定は、ダイヤルが接続を確立するまでの最大待機時間を表します。

デフォルトは 30 秒です。

https://golang.org/pkg/net/#Dialer.Timeout を参照してください。

`Timeout` は time.Duration 型で設定してください。

トランスポート

`BuildableHTTPClient` では、Transport オプションを変更してクライアントを作成するためのビルダー構造が提供されています。

プロキシの設定

インターネットに直接接続できない場合は、Go がサポートする環境変数 (HTTP_PROXY/HTTPS_PROXY) を使用するか、カスタム HTTP クライアントを作成してプロキシを設定できます。次の例では、クライアントがプロキシエンドポイントとして PROXY_URL を使用するように設定しています。

```
import awshttp "github.com/aws/aws-sdk-go-v2/aws/transport/http"
import "net/http"

// ...

httpClient := awshttp.NewBuildableClient().WithTransportOptions(func(tr
 *http.Transport) {
    proxyURL, err := url.Parse("PROXY_URL")
    if err != nil {
        log.Fatal(err)
    }
    tr.Proxy = http.ProxyURL(proxyURL)
})
```

その他の設定

次に示しているのは、HTTP クライアントのチューニングに使用できるその他の Transport 設定です。ここで説明されていない追加の設定については、Transport 型に関するドキュメントを参照してください。これらの設定は次の例に示すように適用できます。

```
import awshttp "github.com/aws/aws-sdk-go-v2/aws/transport/http"
import "net/http"

// ...

httpClient := awshttp.NewBuildableClient().WithTransportOptions(func(tr
 *http.Transport) {
    tr.ExpectContinueTimeout = 0
    tr.MaxIdleConns = 10
})
```

Transport.ExpectContinueTimeout

リクエストに [Expect: 100-continue] ヘッダーが含まれている場合、この設定はリクエストヘッダーの送信完了後にサーバーから最初のレスポンスヘッダーを受信するまでの最大待機時間を表しま

す。この時間にはリクエストヘッダーの送信時間は含まれません。このタイムアウトが経過すると、HTTP クライアントはペイロードの送信を開始します。

デフォルトは 1 秒です。

0 に設定するとタイムアウトは無効になり、待機せずにペイロードが送信されます。この設定のユースケースの 1 つは、Amazon S3 を使用する関数のように (後述)、プロキシやサードパーティのサービスでセッション処理に関する問題が発生する場合です。

https://golang.org/pkg/net/http/#Transport.ExpectContinueTimeout を参照してください。

`ExpectContinue` は time.Duration 型で設定してください。

Transport.IdleConnTimeout

この設定は、HTTP リクエスト間でアイドル状態のネットワーク接続を維持する最大時間を表します。

制限なしにするには 0 に設定します。

https://golang.org/pkg/net/http/#Transport.IdleConnTimeout を参照してください。

`IdleConnTimeout` は time.Duration 型で設定してください。

Transport.MaxIdleConns

この設定は、すべてのホストにわたって保持されるアイドル (キープアライブ) 接続の最大数を表します。この値を増やすユースケースの 1 つは、同じクライアントから短期間に多数の接続が行われる場合です。

0 に設定すると無制限になります。

https://golang.org/pkg/net/http/#Transport.MaxIdleConns を参照してください。

`MaxIdleConns` は int 型で設定してください。

Transport.MaxIdleConnsPerHost

この設定は、ホストごとに保持するアイドル (キープアライブ) 接続の最大数を表します。この値を増やすユースケースの 1 つは、同じクライアントから短期間に多数の接続が行われる場合です。

デフォルトでは、ホストごとに 2 つのアイドル接続が保持されます。

0 に設定すると、DefaultMaxIdleConnsPerHost (2) が使用されます。

https://golang.org/pkg/net/http/#Transport.MaxIdleConnsPerHost を参照してください。

`MaxIdleConnsPerHost` は int 型で設定してください。

Transport.ResponseHeaderTimeout

この設定は、クライアントがレスポンスヘッダーを読み取るまでに待機する最大時間を表します。

クライアントがこの時間内にレスポンスヘッダーを読み取れない場合、リクエストはタイムアウトエラーで失敗します。

長時間実行される Lambda 関数を使用する場合、この値の設定には注意が必要です。Lambda 関数が終了するかタイムアウトするまで、レスポンスヘッダーが返されないためです。ただし、**InvokeAsync** API オペレーションではこのオプションを使用できます。

デフォルトではタイムアウトはなく、無期限に待機します。

https://golang.org/pkg/net/http/#Transport.ResponseHeaderTimeout を参照してください。

`ResponseHeaderTimeout` は time.Duration 型で設定してください。

Transport.TLSHandshakeTimeout

この設定は、TLS ハンドシェイクが完了するまでの最大待機時間を表します。

デフォルトは 10 秒です。

0 に設定すると、タイムアウトは無効になります。

https://golang.org/pkg/net/http/#Transport.TLSHandshakeTimeout を参照してください。

`TLSHandshakeTimeout` は time.Duration 型で設定してください。

HTTP インターセプター

インターセプターを使用して、API リクエストおよびレスポンスの実行フローにフックを挿入できます。インターセプターは、SDK がユーザー定義のコードを呼び出して、リクエスト/レスポンスのライフサイクルに処理を挿入できるようにする、柔軟な仕組みです。これにより、進行中のリクエストの変更、リクエスト処理のデバッグ、例外の確認などを行うことができます。

インターセプターとミドルウェアの比較

AWS SDK for Go v2 では、リクエスト処理をカスタマイズする手段として、インターセプターとミドルウェアの両方を提供しています。いずれも同様の目的に使用できますが、対象ユーザーやユースケースが異なります。

- インターセプターは、HTTP 処理に特化したシンプルな API を使用してリクエスト/レスポンス処理をカスタマイズする SDK ユーザー向けに設計されています。インターセプターはリクエストライフサイクルの特定の段階にフックを挿入でき、HTTP リクエストおよびレスポンスを直接操作します。
- ミドルウェアはより高度なシステムであり、トランスポートに依存しない設計となっており、主に SDK 内部で使用されます。ミドルウェアは強力な反面、SDK の内部構造に関する深い知識や、より複雑なインターフェイスの扱いが求められます。

一般的なユースケースにおいて、インターセプターがミドルウェアより優れている主な点は次のとおりです。

- HTTP に特化: インターセプターは HTTP リクエストおよびレスポンスを直接扱うため、ミドルウェアに必要なトランスポート型の判定が不要です。
- インターフェイスがシンプル: 各インターセプターフックは、特定の用途に特化したシンプルなインターフェイスを備えており、汎用的なミドルウェアとは異なる設計になっています。
- 実行モデルが明確: インターセプターは、リクエストのライフサイクル中の明確に定義されたポイントで実行され、ミドルウェアスタックの順序を理解する必要がありません。

> **Note**
>
> インターセプターは既存のミドルウェアシステムの上に構築されており、両者は同じアプリケーション内で共存できます。ミドルウェアは、トランスポートに依存しない動作や複雑なスタック操作が必要な高度なユースケースに引き続き使用できます。

使用可能なインターセプターフック

AWS SDK for Go v2 では、リクエストライフサイクルのさまざまなステージで使用できるインターセプターフックを提供しています。各フックは、実装できる特定のインターフェイスに対応しています。

- BeforeExecution - オペレーション実行時に最初に呼び出されるフック
- BeforeSerialization - 入力メッセージがトランスポートリクエストにシリアル化される前
- AfterSerialization - 入力メッセージがトランスポートリクエストにシリアル化された後
- BeforeRetryLoop - 再試行ループに入る前
- BeforeAttempt - 再試行ループ内で最初に呼び出されるフック
- BeforeSigning - トランスポートリクエストが署名される前
- AfterSigning - トランスポートリクエストが署名された後
- BeforeTransmit - トランスポートリクエストが送信される前
- AfterTransmit - トランスポートレスポンスを受信した後
- BeforeDeserialization - トランスポートレスポンスが逆シリアル化される前
- AfterDeserialization - トランスポートレスポンスがアンマーシャルされた後
- AfterAttempt - 再試行ループ内で最後に呼び出されるフック
- AfterExecution - オペレーション実行中に最後に呼び出されるフック

1 つのインターセプターで複数のインターフェイスを実装して、リクエストライフサイクルの複数のステージにフックを挿入できます。

インターセプターの登録

インターセプターは、サービスクライアントを作成するときや、特定のオペレーションの設定をオーバーライドするときに登録します。登録方法は、インターセプターをクライアントのすべてのオペレーションに適用するか、特定のオペレーションのみに適用するかによって異なります。

インターセプターは、追加および削除メソッドを備えた登録オブジェクトを通じて管理されます。次の例では、署名処理の前に送信リクエストに AWS X-Ray トレース ID ヘッダーを追加するシンプルなインターセプターを示しています。

```
type recursionDetection struct{}

func (recursionDetection) BeforeSigning(ctx context.Context, in
 *smithyhttp.InterceptorContext) error {
    if traceID := os.Getenv("_X_AMZN_TRACE_ID"); traceID != "" {
        in.Request.Header.Set("X-Amzn-Trace-Id", traceID)
    }
```

```
    return nil
}

// use it on the client
svc := s3.NewFromConfig(cfg, func(o *s3.Options) {
    o.Interceptors.AddBeforeSigning(recursionDetection{})
})
```

インターセプターの登録オブジェクトはクライアントの Options に追加されて、オペレーションごとのインターセプター設定が可能になります。

```
// ... or use it per-operation
s3.ListBuckets(context.Background(), &s3.ListBucketsInput{
}, func(o *s3.Options) {
   o.Interceptors.AddBeforeSigning(recursionDetection{})
})
```

グローバルなインターセプター設定

また、各インターセプター型に対応する適切な config.LoadDefaultConfig オプションを指定して With* 関数を使用することで、インターセプターをグローバルに登録することもできます。これにより、その設定から作成されるすべての AWS サービスクライアントにインターセプターが適用されます。

```
type myExecutionInterceptor struct{}

func (*myExecutionInterceptor) AfterExecution(ctx context.Context, in
 *smithyhttp.InterceptorContext) error {
    // Add your custom logic here
    return nil
}

cfg, err := config.LoadDefaultConfig(context.Background(),
    config.WithAfterExecution(&myExecutionInterceptor{}))
if err != nil {
    panic(err)
}

// every service client created from the above config
// will include this interceptor
svc := s3.NewFromConfig(cfg)
```

ログ記録

AWS SDK for Go には、リクエストの問題や失敗をデバッグ・診断するために、アプリケーションでデバッグ情報を有効にできるログ記録機能があります。Logger インターフェイスと ClientLogMode は、クライアントがログに記録する方法と内容を決定するための主要な構成要素です。

ロガー

LoadDefaultConfig を使用して Config を作成すると、デフォルトで Logger はログメッセージを標準エラー出力 (stderr) に送信するように設定されます。Logger インターフェイスを実装するカスタムロガーは、config.WithLogger でラップして LoadDefaultConfig に引数として渡すことができます。

例えば、クライアントが applicationLogger を使用するように設定するには、次のようにします。

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithLogger(applicationLogger))
```

このように作成された aws.Config を使用するクライアントは、applicationLogger にログメッセージを送信します。

コンテキスト対応ロガー

ロガーの実装では、オプションの ContextLogger インターフェイスを実装できます。このインターフェイスを実装したロガーは、現在のコンテキストで WithContext メソッドを呼び出します。これにより、ログ記録の実装で、コンテキスト内の値に基づいて追加のログメタデータを書き込める新しい Logger を返すことができます。

ClientLogMode

デフォルトでは、サービスクライアントはログメッセージを出力しません。クライアントがデバッグ目的でログメッセージを出力するように設定するには、Config の ClientLogMode メンバーを使用します。ClientLogMode を設定することにより、デバッグ目的で次のログ記録を有効にできます。

- Signature Version 4 (SigV4) 署名処理
- リクエストの再試行
- HTTP リクエスト
- HTTP レスポンス

例えば、HTTP リクエストおよび再試行処理の口グ記録を有効にするには、次のようにします。

```
cfg, err := config.LoadDefaultConfig(context.TODO(),
 config.WithClientLogMode(aws.LogRetries | aws.LogRequest))
```

使用可能なさまざまなクライアントログモードについては、「ClientLogMode」を参照してください。

トレースとメトリクス

AWS SDK for Go は、SDK オペレーションのトレーススパンとクライアント側のメトリクスを記録するように計測されます。デフォルトでは、クライアントはトレースとメトリクスの両方に no-op 実装を使用します。つまり、プロバイダーを設定しない限り、データは収集されません。

サービスクライアントには、オブザーバビリティのための 2 つの設定オプションがあります。

- TracerProvider – トレーサーを作成し、クライアントトレーススパンを記録するためのエントリポイント。
- MeterProvider – メーターを作成し、クライアント側のメトリクスを記録するためのエントリポイント。

OpenTelemetry (OTel) 仕様に着想を得ながら、これらの APIsは で個別に定義されていますsmithy-go。SDK には、具体的な OTel SDK 実装を SDK のプロバイダーインターフェイスに接続するためのアダプターモジュールが用意されています。

トレース

Smithyoteltracing アダプターモジュールを使用して、OTel `trace.TracerProvider`をサービスクライアントに接続します。

次の例は、Amazon S3 クライアントのトレースを設定する方法を示しています。

```
import (
    "github.com/aws/aws-sdk-go-v2/service/s3"
    "github.com/aws/smithy-go/tracing/smithyoteltracing"
    "go.opentelemetry.io/otel/trace"
)

// provider is an OTel trace.TracerProvider that you have configured.
```

```
var provider trace.TracerProvider

svc := s3.NewFromConfig(cfg, func(o *s3.Options) {
    o.TracerProvider = smithyoteltracing.Adapt(provider)
})
```

SDK オペレーションは、リクエストのシリアル化、署名、再試行ループなど、オペレーションライフサイクルの高レベルのコンポーネントをカバーするスパン階層で計測されます。

メトリクス

Smithyotelmetrics アダプターモジュールを使用して、OTel `metric.MeterProvider`をサービスクライアントに接続します。

次の例は、Amazon S3 クライアントのメトリクスを設定する方法を示しています。

```
import (
    "github.com/aws/aws-sdk-go-v2/service/s3"
    "github.com/aws/smithy-go/metrics/smithyotelmetrics"
    "go.opentelemetry.io/otel/metric"
)

// provider is an OTel metric.MeterProvider that you have configured.
var provider metric.MeterProvider

svc := s3.NewFromConfig(cfg, func(o *s3.Options) {
    o.MeterProvider = smithyotelmetrics.Adapt(provider)
})
```

サポートされるメトリクス

SDK クライアントは、次のメトリクスを収集します。

メトリクス名	Unit	型	説明
`client.call.duration`	s	ヒストグラム	再試行、リクエストとレスポンス本文の送受信時間を含む全体的な通話時間。
`client.call.attempts`	{attem	Monotonic Counter	個々のオペレーションの試行回数。

メトリクス名	Unit	型	説明
client.call.errors	{error}	Monotonic Counter	オペレーションのエラーの数。
client.call.attempt_duration	s	ヒストグラム	サービスに接続してリクエストを送信し、HTTP ステータスコードとヘッダーを返す時間 (キューに入れられた送信待機時間を含む) 。
client.call.resolve_endpoint_duration	s	ヒストグラム	リクエストのエンドポイント (DNS ではなくエンドポイントリゾルバー) を解決する時間。
client.call.deserialization_duration	s	ヒストグラム	メッセージ本文を逆シリアル化する時間。
client.call.auth.signing_duration	s	ヒストグラム	リクエストに署名する時間。
client.call.auth.resolve_identity_duration	s	ヒストグラム	ID プロバイダーから ID (AWS 認証情報、ベアラートークンなど) を取得する時間。

該当する場合は、各メトリクスに次の属性 (ディメンション) が含まれます。

- rpc.service – サービス名。
- rpc.method – オペレーション名。
- exception.type – エラータイプ (に付属client.call.errors)。
- auth.scheme_id – 認証スキーム (認証関連のメトリクスに付属) 。

HTTP クライアントメトリクス

SDK の HTTP クライアントは、基盤となる HTTP 接続ライフサイクルに関連する以下の追加のメトリクスを収集します。

メトリクス名	Unit	型	説明
client.http.connections.acquire_duration	s	ヒストグラム	接続の取得リクエストにかかる時間。
client.http.connections.dns_lookup_duration	s	ヒストグラム	DNS ルックアップの実行にかかる時間。
client.http.connections.tls_handshake_duration	s	ヒストグラム	TLS ハンドシェイクの実行にかかる時間。
client.http.connections.usage	{接続}	UpDownCounter	プール内の接続の現在の状態。idle または の値を持つstateディメンションを使用しますacquired。
client.http.do_request_duration	s	ヒストグラム	HTTP リクエストの実行にかかった合計時間。
client.http.time_to_first_byte	s	ヒストグラム	リクエストの送信から最初のレスポンスバイトの受信までの時間。

再試行とタイムアウト

AWS SDK for Go を使用すると、HTTP サービスへのリクエストの再試行動作を設定できます。デフォルトでは、サービスクライアントは retry.Standard をデフォルトのリトライヤとして使用します。デフォルトの設定や動作がアプリケーションの要件を満たさない場合は、リトライヤの設定を調整するか、独自のリトライヤ実装を提供できます。

AWS SDK for Go は、実装する再試行実装に必要なメソッドのセットを定義する aws.Retryer インターフェイスを提供します。SDK には、再試行用に retry.Standard と aws.NoOpRetryer の 2 つの実装が用意されています。

標準リトライヤ

retry.Standard リトライヤは、SDK クライアントが使用するデフォルトの `aws.Retryer` 実装です。標準リトライヤは、レート制限付きの再試行方式を採用しており、最大試行回数を設定できるほか、リクエストのバックオフポリシーも調整できます。

次の表では、このリトライヤのデフォルト値を示しています。

プロパティ	デフォルト
最大試行回数	3
最大バックオフ遅延	20 秒

リクエストの呼び出し時に再試行可能なエラーが発生すると、標準リトライヤは指定された設定に基づいてリクエストを遅延させた後、再試行します。再試行により、リクエストの全体的なレイテンシーが長くなります。そのため、デフォルトの設定がアプリケーションの要件に合わない場合は、リトライヤを設定する必要があります。

標準リトライヤ実装で再試行可能と判断されるエラーの詳細については、retry パッケージのドキュメントを参照してください。

NopRetryer

aws.NopRetryer は、すべての再試行を無効にするために用意されている `aws.Retryer` 実装です。このリトライヤを使用すると、サービスクライアントのオペレーションは 1 回だけ試行され、エラーが発生した場合は呼び出し元のアプリケーションにそのまま返されます。

動作のカスタマイズ

SDK は `aws.Retryer` 実装をラップするためのヘルパーユーティリティ群を提供しており、必要な再試行動作を適用したリトライヤを返します。デフォルトのリトライヤは、アプリケーションの要件に応じて、すべてのクライアント、個別のクライアント、またはオペレーション単位でオーバーライドできます。これを行う方法を示すその他の例については、retry パッケージのドキュメントの例を参照してください。

> **Warning**
>
> config.WithRetryer を使用してグローバルな aws.Retryer 実装を指定する場合は、呼び出しごとに新しい aws.Retryer インスタンスを返すようにする必要があります。これにより、すべてのサービスクライアント間でグローバルな再試行トークンバケットが作成されなくなります。

最大試行回数の制限

retry.AddWithMaxAttempts を使用して aws.Retryer 実装をラップし、最大試行回数を必要な値に設定します。

> **Warning**
>
> retry.AddWithMaxAttempts に 0 を指定すると、SDK はリクエストが成功するか、再試行不能なエラーが返されるまで、すべての再試行可能なエラーに対してリクエストを再試行できます。SDK に無限の再試行を許可すると、ワークロードが暴走し、請求サイクルが増大する可能性があります。

```
import "context"
import "github.com/aws/aws-sdk-go-v2/aws/retry"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

// MaxAttempts will be infinite (will retry indefinitely)
cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithRetryer(func()
 aws.Retryer {
    return retry.AddWithMaxAttempts(retry.NewStandard(), 0)
}))
if err != nil {
    return err
}

client := s3.NewFromConfig(cfg)
```

関数型オプションを使用して MaxAttempts を直接設定してリトライヤをインスタンス化する場合、動作はわずかに異なります。具体的には、0 以下の値を設定すると、無限の再試行ではなく、デフォルトの最大 3 回の再試行が使用されます。

```
import "context"
import "github.com/aws/aws-sdk-go-v2/aws/retry"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

// MaxAttempts will default to 3
cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithRetryer(func()
 aws.Retryer {
    return retry.NewStandard(func(o *retry.StandardOptions) {
        o.MaxAttempts = 0
    })
}))
if err != nil {
    return err
}

client := s3.NewFromConfig(cfg)
```

最大バックオフ遅延の制限

retry.AddWithMaxBackoffDelay を使用して aws.Retryer 実装をラップし、失敗したリクエストの再試行間に発生する最大バックオフ遅延を制限できます。

例えば、次のコードを使用して、標準クライアントのリトライヤに 5 秒の最大遅延を設定できます。

```
import "context"
import "time"
import "github.com/aws/aws-sdk-go-v2/aws/retry"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithRetryer(func()
 aws.Retryer {
```

```
    return retry.AddWithMaxBackoffDelay(retry.NewStandard(), time.Second*5)
}))
if err != nil {
    return err
}

client := s3.NewFromConfig(cfg)
```

追加の API エラーコードを再試行する

retry.AddWithErrorCodes を使用すると、aws.Retryer 実装をラップして、再試行可能と見なす追加の API エラーコードを指定できます。

例えば、次のコードを使用して、標準クライアントリトライヤをラップし、Amazon S3 の NoSuchBucketException 例外を再試行可能として含めることができます。

```
import "context"
import "time"
import "github.com/aws/aws-sdk-go-v2/aws/retry"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/aws-sdk-go-v2/service/s3/types"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithRetryer(func()
 aws.Retryer {
    return retry.AddWithErrorCodes(retry.NewStandard(), (*types.NoSuchBucketException)
(nil).ErrorCode())
}))
if err != nil {
    return err
}

client := s3.NewFromConfig(cfg)
```

クライアント側のレート制限

では、最新の SDK の動作に合わせて、標準の再試行ポリシーに新しいクライアント側のレート制限メカニズム AWS SDK for Go が導入されています。 SDKs この動作は、リトライヤの options にある RateLimiter フィールドによって制御されます。

RateLimiter は、容量を設定されたトークンバケットとして動作し、オペレーションの試行失敗によりトークンを消費します。トークンが不足している状態で再試行を試みると、そのオペレーションは QuotaExceededError により失敗します。

デフォルトの実装では、次のようにパラメータ化されています (各設定値の変更方法を示す例も示しています)。

- 容量は 500 (NewTokenRateLimit を使用して StandardOptions の RateLimiter の値を設定)
- タイムアウトによる再試行は 10 トークンを消費 (StandardOptions の RetryTimeoutCost を設定)
- その他のエラーによる再試行は 5 トークンを消費 (StandardOptions の RetryCost を設定)
- 最初の試行で成功したオペレーションは 1 トークンを追加 (StandardOptions の NoRetryIncrement を設定)
  - 2 回目以降の試行で成功したオペレーションはトークンを追加しない

デフォルトの動作がアプリケーションの要件に合わない場合は、ratelimit.None を使用してレート制限を無効にできます。

例: レート制限を変更

```
import (
    "context"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/aws/ratelimit"
    "github.com/aws/aws-sdk-go-v2/aws/retry"
    "github.com/aws/aws-sdk-go-v2/config"
)

// ...

cfg, err := config.LoadDefaultConfig(context.Background(), config.WithRetryer(func()
 aws.Retryer {
    return retry.NewStandard(func(o *retry.StandardOptions) {
        // Makes the rate limiter more permissive in general. These values are
        // arbitrary for demonstration and may not suit your specific
        // application's needs.
        o.RateLimiter = ratelimit.NewTokenRateLimit(1000)
        o.RetryCost = 1
        o.RetryTimeoutCost = 3
        o.NoRetryIncrement = 10
    })
```

```
}))
```

例: ratelimit.None を使用してレート制限なしに変更

```
import (
    "context"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/aws/ratelimit"
    "github.com/aws/aws-sdk-go-v2/aws/retry"
    "github.com/aws/aws-sdk-go-v2/config"
)

// ...

cfg, err := config.LoadDefaultConfig(context.Background(), config.WithRetryer(func()
 aws.Retryer {
    return retry.NewStandard(func(o *retry.StandardOptions) {
        o.RateLimiter = ratelimit.None
    })
}))
```

タイムアウト

サービスクライアントのオペレーションを呼び出す際には、context パッケージを使用してタイムアウトやデッドラインを設定します。context.WithDeadline を使用してアプリケーションのコンテキストをラップし、呼び出したオペレーションを完了する必要がある特定の時間に期限を設定します。一定時間 `time.Duration` 後にタイムアウトを設定するには、context.WithTimeout を使用します。SDK は、渡された `context.Context` をサービス API の呼び出し時に HTTP トランスポートクライアントに渡します。SDK に渡したコンテキストが既にキャンセルされている、または呼び出し中にキャンセルされた場合、SDK はそれ以上リクエストを再試行せず、呼び出し元アプリケーションに制御を戻します。そのため、SDK に渡すコンテキストがキャンセルされた場合に備えて、アプリケーション側で適切なキャンセル処理を実装する必要があります。

タイムアウトの設定

次の例では、サービスクライアントのオペレーションにタイムアウトを設定する方法を示しています。

```
import "context"
```

```
import "time"

// ...

ctx := context.TODO() // or appropriate context.Context value for your application

client := s3.NewFromConfig(cfg)

// create a new context from the previous ctx with a timeout, e.g. 5 seconds
ctx, cancel := context.WithTimeout(ctx, 5*time.Second)
defer cancel()

resp, err := client.GetObject(ctx, &s3.GetObjectInput{
    // input parameters
})
if err != nil {
    // handle error
}
```

の使用AWS SDK for Go

アプリケーションで AWS SDK for Go を使用してプログラミングを行う際の、一般的かつ推奨される方法について説明します。

トピック

- サービスクライアントの作成
- サービスオペレーションの呼び出し
- サービスクライアントの同時使用
- オペレーションページネーターの使用
- ウェーターを使用する
- AWS SDK for Go V2 でのエラー処理

サービスクライアントの作成

サービスクライアントは、サービスクライアントの Go パッケージに含まれている New または NewFromConfig 関数を使用して作成できます。これらの関数はいずれも、サービス API を呼び出すメソッドを含む Client 構造体型を返します。New と NewFromConfig はどちらもクライアントの作成用に同じ設定オプションを提供しますが、作成パターンに若干の違いがあります。詳細については、以降のセクションで説明します。

NewFromConfig

NewFromConfig 関数は、aws.Config を使用してサービスクライアントを作成するための一貫したインターフェイスを提供します。aws.Config は、config.LoadDefaultConfig を使用してロードできます。aws.Config の作成の詳細については、「SDK を設定」を参照してください。次の例では、aws.Config および NewFromConfig 関数を使用して Amazon S3 サービスクライアントを作成する方法を示しています。

```
import "context"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
```

```
        panic(err)
    }

    client := s3.NewFromConfig(cfg)
```

設定のオーバーライド

NewFromConfig には、クライアントの設定 Options 構造体を変更できる関数型引数を 1 つ以上渡すことができます。これにより、リージョンの変更や、Amazon S3 の UseAccelerate オプションといったサービス固有のオプションの変更など、特定のオーバーライドが可能になります。例:

```
import "context"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        panic(err)
    }

    client := s3.NewFromConfig(cfg, func(o *s3.Options) {
        o.Region = "us-west-2"
        o.UseAccelerate = true
    })
```

クライアントの Options 値に対するオーバーライドは、NewFromConfig に渡される関数型引数の順序によって決まります。

新

> **Note**
>
> New は、クライアントのより高度な作成方法と見なされています。NewFromConfig を使用してクライアントを作成することをお勧めします。aws.Config 構造体を使用した作成が可能になるためです。これにより、アプリケーションで必要な各サービスクライアントのために Options 構造体インスタンスを個別に作成する必要がなくなります。

New 関数はクライアントコンストラクタです。クライアントパッケージの Options 構造体のみを使用してクライアントを作成するためのインターフェイスを提供します。例えば、New を使用して Amazon S3 クライアントを作成するには、次のようにします。

```
import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/credentials"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ...

    client := s3.New(s3.Options{
        Region:      "us-west-2",
        Credentials:
 aws.NewCredentialsCache(credentials.NewStaticCredentialsProvider(accessKey, secretKey,
 "")),
    })
```

設定のオーバーライド

New には、クライアントの設定 Options 構造体を変更できる関数型引数を 1 つ以上渡すことができます。これにより、リージョンの変更や、Amazon S3 の UseAccelerate オプションといったサービス固有のオプションの変更など、特定のオーバーライドが可能になります。例:

```
import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/credentials"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ...

    options := s3.Options{
        Region:      "us-west-2",
        Credentials:
 aws.NewCredentialsCache(credentials.NewStaticCredentialsProvider(accessKey, secretKey,
 "")),
    }

    client := s3.New(options, func(o *s3.Options) {
        o.Region = "us-east-1"
        o.UseAccelerate = true
    })
```

クライアントの Options 値に対するオーバーライドは、New に渡される関数型引数の順序によって決まります。

サービスオペレーションの呼び出し

サービスクライアントのインスタンスを作成した後、それを使用してサービスのオペレーションを呼び出すことができます。例えば、Amazon S3 の GetObject オペレーションを呼び出すには、次のようにします。

```
response, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
        Bucket: aws.String("amzn-s3-demo-bucket"),
        Key:    aws.String("obj-key"),
    })
```

サービスオペレーションを呼び出すと、SDK は入力を同期的に検証し、リクエストをシリアル化し、認証情報で署名して AWS に送信します。その後、レスポンスまたはエラーを逆シリアル化します。ほとんどの場合、サービスオペレーションを直接呼び出すことができます。各サービスオペレーションのクライアントメソッドは、オペレーションのレスポンス構造体とエラーのインターフェイス型を返します。サービスオペレーションのレスポンス構造体にアクセスする前に、error 型を必ず確認してエラーの有無を判断する必要があります。

サービスオペレーションへのパラメータの受け渡し

サービスの各オペレーションは、それぞれのメソッドで context.Context 値を受け取り、リクエストの期限などを設定できます。これらの期限は SDK によって適用されます。また、各サービスオペレーションは、それぞれのサービスの Go パッケージに含まれている <OperationName>Input 構造体を受け取ります。API の入力パラメータは、オペレーションの入力構造体を使用して渡します。

オペレーションの入力構造体には、標準の Go 型 (数値型、boolean 型、文字列型、マップ型、リスト型など) のパラメータを含めることができます。より複雑な API オペレーションでは、入力パラメータのより複雑なモデル化を行う場合があります。サービス固有の構造体や列挙型などは、そのサービスの types Go パッケージに含まれています。

また、サービスによっては、Go 型のデフォルト値とユーザーが明示的に設定した値かを区別する場合があります。そのような場合、対象の型へのポインタ参照で値を渡す必要があります。数値、boolean、文字列などの標準的な Go 型では、変換を容易にするために、aws パッケージには <Type> と From<Type> という便利な関数が用意されています。例えば、aws.String を使用する

と、string 型を *string 型に変換して、文字列へのポインタを必要とする入力パラメータに渡すことができます。逆に、aws.ToString を使用すると、*string 型から string 型に変換できます。同時に、nil ポインタの参照先取得 (dereference) を防ぐこともできます。これらの To<Type> 関数は、サービスのレスポンスを処理する際に便利です。

次に示しているのは、Amazon S3 クライアントを使用して GetObject API を呼び出し、types パッケージと aws.<Type> ヘルパーを使用して入力を作成する方法の例です。

```
import "context"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/s3"
    import "github.com/aws/aws-sdk-go-v2/service/s3/types"

    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        panic(err)
    }

    client := s3.NewFromConfig(cfg)

    resp, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
        Bucket:       aws.String("amzn-s3-demo-bucket"),
        Key:          aws.String("keyName"),
        RequestPayer: types.RequestPayerRequester,
    })
```

オペレーション呼び出し時のクライアントオプションのオーバーライド

関数型引数を使用してクライアントを作成する際にクライアントのオペレーションのオプションを変更できるのと同様に、サービスのオペレーションメソッドの呼び出し時にも 1 つ以上の関数型引数を渡してクライアントのオプションを変更できます。このアクションはスレッドセーフであり、クライアント上の他の並行オペレーションには影響しません。

例えば、クライアントのリージョンを「us-west-2」から「us-east-1」に変更するには、次のようにします。

```
cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithRegion("us-west-2"))
    if err != nil {
```

```
        log.Printf("error: %v", err)
        return
    }

    client := s3.NewFromConfig(cfg)

    params := &s3.GetObjectInput{
        // ...
    }

    resp, err := client.GetObject(context.TODO(), params, func(o *Options) {
        o.Region = "us-east-1"
    })
```

オペレーションレスポンスの処理

サービスの各オペレーションメソッドには、レスポンスメンバーを含む出力構造体が関連付けられています。出力構造体の名前は <OperationName>Output というパターンに従っています。オペレーションによっては、出力構造体にメンバーが定義されていない場合もあります。サービスのオペレーションを呼び出した後は、error 引数の型を必ず確認して、そのオペレーション実行中のエラーの有無を判断する必要があります。返されるエラーは、クライアント側の入力検証エラーから、クライアントに返されるサービス側のエラーレスポンスまで多岐にわたります。クライアントから nil 以外のエラーが返された場合は、オペレーションの出力構造体にアクセスしないようにしてください。

例えば、オペレーションエラーを口グに記録し、呼び出し元の関数から早期に制御を戻すには、次のようにします。

```
response, err := client.GetObject(context.TODO())
    if err != nil {
        log.Printf("GetObject error: %v", err)
        return
    }
```

特定のエラータイプの確認方法を含むエラー処理の詳細については、TODO (参照先は今後提供予定) を参照してください。

io.ReadCloser を含むレスポンス

API オペレーションによっては、出力メンバーとして io.ReadCloser を含むレスポンス構造体を返す場合もあります。これに該当するのは、HTTP レスポンス本文に一部の出力要素を含める API オペレーションの場合です。

例えば、Amazon S3 の GetObject オペレーションでは、オブジェクトのペイロードにアクセスするための io.ReadCloser である Body メンバーを含むレスポンスを返します。

> **Warning**
>
> 出力メンバーの内容を使用したかどうかにかかわらず、io.ReadCloser のすべての出力メンバーに対しては Close() を必ず実行するようにしてください。この処理を実行しないと、リソースリークが発生し、以降呼び出されるオペレーションでレスポンス本文の読み取りに問題が発生する可能性があります。

```
resp, err := s3svc.GetObject(context.TODO(), &s3.GetObjectInput{...})
    if err != nil {
        // handle error
        return
    }
    // Make sure to always close the response Body when finished
    defer resp.Body.Close()

    decoder := json.NewDecoder(resp.Body)
    if err := decoder.Decode(&myStruct); err != nil {
        // handle error
        return
    }
```

レスポンスメタデータ

サービスのすべてのオペレーションの出力構造体には、型 middleware.Metadata の middleware.Metadata メンバーが含まれています。ResultMetadata は、サービスによってモデル化されていないレスポンス情報を SDK のミドルウェアが取得するために使用されます。これには RequestID などのメタデータが含まれます。例えば、AWS サポートによるリクエストのトラブルシューティングに役立つように、サービスのレスポンスに関連付けられた RequestID を取得するには、次のようにします。

```
import "fmt"
    import "log"
    import "github.com/aws/aws-sdk-go-v2/aws/middleware"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ..

    resp, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
        // ...
    })
    if err != nil {
        log.Printf("error: %v", err)
        return
    }

    requestID, ok := middleware.GetRequestIDMetadata(resp.ResultMetadata)
    if !ok {
        fmt.Println("RequestID not included with request")
    }

    fmt.Printf("RequestID: %s\n", requestID)
```

サービスクライアントの同時使用

同じサービスクライアントを複数の goroutine で同時に使用して、複数のリクエストを送信できます。サービスクライアントは任意の数の goroutine で使用できます。

次の例では、Amazon S3 サービスクライアントを複数の goroutine で使用しています。この例では、2 つのオブジェクトを Amazon S3 バケットに同時にアップロードします。

```
import "context"
    import "log"
    import "strings"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/s3"

    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Printf("error: %v", err)
```

```
        return
    }

    client := s3.NewFromConfig(cfg)

    type result struct {
        Output *s3.PutObjectOutput
        Err    error
    }

    results := make(chan result, 2)

    var wg sync.WaitGroup
    wg.Add(2)

    go func() {
    defer wg.Done()
        output, err := client.PutObject(context.TODO(), &s3.PutObjectInput{
            Bucket: aws.String("amzn-s3-demo-bucket"),
            Key:    aws.String("foo"),
            Body:   strings.NewReader("foo body content"),
        })
        results <- result{Output: output, Err: err}
    }()

    go func() {
        defer wg.Done()
        output, err := client.PutObject(context.TODO(), &s3.PutObjectInput{
            Bucket: aws.String("amzn-s3-demo-bucket"),
            Key:    aws.String("bar"),
            Body:   strings.NewReader("bar body content"),
        })
        results <- result{Output: output, Err: err}
    }()

    wg.Wait()

    close(results)

    for result := range results {
        if result.Err != nil {
            log.Printf("error: %v", result.Err)
            continue
        }
```

```
        fmt.Printf("etag: %v", aws.ToString(result.Output.ETag))
    }
```

オペレーションページネーターの使用

通常、アイテムのリストを取得するときは、出力構造体でトークンやマーカーを確認して、AWS サービスがすべての結果を返したかどうかを判断する必要があります。トークンやマーカーが存在する場合は、それを使用して次のページの結果をリクエストします。これらのトークンやマーカーを自分で管理する代わりに、サービスパッケージで提供されているページネーター型を使用できます。

ページネーターヘルパーは、サポートされているサービスオペレーションで使用でき、サービスクライアントの Go パッケージに含まれています。サポートされているオペレーションのページネーターを作成するには、New<OperationName>Paginator 関数を使用します。ページネーターコンストラクタは、サービスの Client、オペレーションの <OperationName>Input 入力パラメータ、および他のオプションのページネーター設定を構成するための関数型引数 (任意) を引数として受け取ります。

返されるオペレーションページネーター型を使用すれば、ページ分割されたオペレーションを簡単に反復処理できます。最終ページに到達するか、アプリケーションが探している項目を見つけるまで処理を続行できます。ページネーター型には HasMorePages と NextPage の 2 つのメソッドがあります。HasMorePages は、最初のページがまだ取得されていない場合や、追加のページが存在する場合に boolean 値の true を返します。オペレーションの最初または後続のページを取得するには、NextPage オペレーションを呼び出す必要があります。NextPage は context.Context を受け取り、オペレーションの出力および対応するエラーを返します。クライアントのオペレーションメソッドの戻り値と同様に、返されるレスポンス構造体を使用する前に、返されるエラーを必ず確認する必要があります。「オペレーションレスポンスの処理」を参照してください。

次の例では、ListObjectsV2 ページネーターを使用して、ListObjectV2 オペレーションから最大 3 ページ分のオブジェクトキーのリストを取得しています。各ページには最大 10 個のキーが含まれており、これは Limit ページネーターオプションで定義されています。

```
import "context"
    import "log"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/service/s3"
```

```
    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Printf("error: %v", err)
        return
    }

    client := s3.NewFromConfig(cfg)

    params := &s3.ListObjectsV2Input{
        Bucket: aws.String("amzn-s3-demo-bucket"),
    }

    paginator := s3.NewListObjectsV2Paginator(client, params, func(o
*s3.ListObjectsV2PaginatorOptions) {
        o.Limit = 10
    })

    pageNum := 0
    for paginator.HasMorePages() && pageNum < 3 {
        output, err := paginator.NextPage(context.TODO())
        if err != nil {
            log.Printf("error: %v", err)
            return
        }
        for _, value := range output.Contents {
            fmt.Println(*value.Key)
        }
        pageNum++
    }
```

クライアントオペレーションメソッドと同様に、NextPage に関数型引数を 1 つ以上渡すことで、リクエストリージョンなどのクライアントオプションを変更できます。オペレーションを呼び出すときのクライアントオプションのオーバーライドの詳細については、「オペレーション呼び出し時のクライアントオプションのオーバーライド」を参照してください。

ウェーターを使用する

非同期の AWS API とやり取りする場合、特定のリソースに対してさらなるアクションを実行するために、そのリソースが使用可能になるまで待機する必要があることがよくあります。

例えば、Amazon DynamoDB の `CreateTable` API は TableStatus として CREATING をすぐに返しますが、ステータスが `ACTIVE` に変わるまでは、読み書きオペレーションを呼び出すことはできません。

テーブルのステータスを定期的にポーリングするロジックを自分で記述するのは、手間がかかりエラーの原因にもなります。ウェーターは、この複雑な処理を簡略化し、ポーリングを自動的に実行するシンプルな API です。

例えば、DynamoDB テーブルが作成されて書き込みオペレーションが可能かどうかをポーリングするために、ウェーターを使用できます。

```
import "context"
    import "fmt"
    import "log"
    import "time"
    import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/dynamodb"

    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Printf("error: %v", err)
        return
    }

    client := dynamodb.NewFromConfig(cfg)

    // we create a waiter instance by directly passing in a client
    // that satisfies the waiters client Interface.
    waiter :=  dynamodb.NewTableExistsWaiter(client)

    // params is the input to api operation used by the waiter
    params := &dynamodb.DescribeTableInput {
        TableName: aws.String("test-table")
    }

    // maxWaitTime is the maximum wait time, the waiter will wait for
    // the resource status.
    maxWaitTime := 5 * time.Minutes

    // Wait will poll until it gets the resource status, or max wait time
```

```
    // expires.
    err := waiter.Wait(context.TODO(), params, maxWaitTime)
    if err != nil {
        log.Printf("error: %v", err)
        return
    }
    fmt.Println("Dynamodb table is now ready for write operations")
```

ウェーター設定のオーバーライド

デフォルトでは、SDK は AWS サービスが各 API に対して最適と定義した最小および最大の遅延値を使用します。ウェーターの作成時やオペレーションの呼び出し時に関数型オプションを指定することで、ウェーター設定をオーバーライドできます。

例えば、ウェーターの作成時に設定をオーバーライドするには、次のようにします。

```
import "context"
    import "fmt"
    import "log"
    import "time"
    import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/dynamodb"

    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Printf("error: %v", err)
        return
    }

    client := dynamodb.NewFromConfig(cfg)

    // we create a waiter instance by directly passing in a client
    // that satisfies the waiters client Interface.
    waiter :=  dynamodb.NewTableExistsWaiter(client, func (o
 *dynamodb.TableExistsWaiterOptions) {

        // override minimum delay to 10 seconds
        o.MinDelay = 10 * time.Second
```

```
        // override maximum default delay to 300 seconds
        o.MaxDelay = 300 * time.Second
    })
```

各ウェーターの Wait 関数でも関数型オプションを受け取ることができます。上記の例と同様に、Wait リクエストごとにウェーター設定をオーバーライドできます。

```
// params is the input to api operation used by the waiter
    params := &dynamodb.DescribeTableInput {
        TableName: aws.String("test-table")
    }

    // maxWaitTime is the maximum wait time, the waiter will wait for
    // the resource status.
    maxWaitTime := 5 * time.Minutes

    // Wait will poll until it gets the resource status, or max wait time
    // expires.
    err := waiter.Wait(context.TODO(), params, maxWaitTime, func (o
 *dynamodb.TableExistsWaiterOptions) {

        // override minimum delay to 5 seconds
        o.MinDelay = 5 * time.Second

        // override maximum default delay to 120 seconds
        o.MaxDelay = 120 * time.Second
    })
    if err != nil {
        log.Printf("error: %v", err)
        return
    }
    fmt.Println("Dynamodb table is now ready for write operations")
```

高度なウェーター設定のオーバーライド

再試行可能なカスタム関数を指定することで、ウェーターのデフォルト動作をカスタマイズすることもできます。ウェーター固有のオプションでは、オペレーションのミドルウェアをカスタマイズするための APIOptions も提供されています。

例えば、高度なウェーター設定のオーバーライドを定義するには、次のようにします。

```
import "context"
    import "fmt"
    import "log"
    import "time"
    import "github.com/aws/aws-sdk-go-v2/aws"
    import "github.com/aws/aws-sdk-go-v2/config"
    import "github.com/aws/aws-sdk-go-v2/service/dynamodb"
    import "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
    // ...

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Printf("error: %v", err)
        return
    }

    client := dynamodb.NewFromConfig(cfg)

    // custom retryable defines if a waiter state is retryable or a terminal state.
    // For example purposes, we will configure the waiter to not wait
    // if table status is returned as `UPDATING`
    customRetryable := func(ctx context.Context, params *dynamodb.DescribeTableInput,
        output *dynamodb.DescribeTableOutput, err error) (bool, error) {
        if output.Table != nil {
            if output.Table.TableStatus == types.TableStatusUpdating {
                // if table status is `UPDATING`, no need to wait
                return false, nil
            }
        }
    }

    // we create a waiter instance by directly passing in a client
    // that satisfies the waiters client Interface.
    waiter :=  dynamodb.NewTableExistsWaiter(client, func (o
 *dynamodb.TableExistsWaiterOptions) {

        // override the service defined waiter-behavior
        o.Retryable = customRetryable
    })
```

AWS SDK for Go V2 でのエラー処理

AWS SDK for Go は、Go の error インターフェイス型を満たすエラーを返します。Error() メソッドを使用することで、特別な処理をせずに SDK のエラーメッセージをフォーマットされた文字列として取得できます。SDK から返されるエラーの中には、Unwrap メソッドを実装しているものがあります。Unwrap メソッドは、根本原因となるエラーやエラー連鎖へのアクセスを提供しつつ、追加のコンテキスト情報を付加するために SDK によって使用されます。エラー連鎖を展開して処理するには、Unwrap メソッドを errors.As と共に使用する必要があります。

重要なのは、error インターフェイス型を返す可能性のある関数またはメソッドを呼び出した後、エラーが発生したかどうかをアプリケーション側で確認することです。エラー処理の最も基本的な形式は、次の例のようになります。

```
if err != nil {
    // Handle error
    return
}
```

エラーのログ記録

最も簡単なエラー処理は、エラーメッセージをログ記録または表示してから、アプリケーションを終了するかアプリケーションに制御を戻す、というものです。

```
import "log"

// ...

if err != nil {
    log.Printf("error: %s", err.Error())
    return
}
```

サービスクライアントのエラー

SDK は、サービスクライアントから返されるすべてのエラーを smithy.OperationError 型でラップします。この OperationError により、基となるエラーに関連付けられたサービス名やオペレーション名などのコンテキスト情報が提供されます。この情報は、1 つ以上のサービスに対してオペレーションのバッチを実行し、エラー処理を一元化しているアプリケーションに役立ちます。アプリケーションでは、errors.As を使用してこの OperationError メタデータにアクセスできます。

```
import "log"
import "github.com/aws/smithy-go"

// ...

if err != nil {
    var oe *smithy.OperationError
    if errors.As(err, &oe) {
        log.Printf("failed to call service: %s, operation: %s, error: %v",
 oe.Service(), oe.Operation(), oe.Unwrap())
    }
    return
}
```

API エラーレスポンス

サービスのオペレーションは、特定のエラーを示すために、モデル化されたエラー型を返す可能性があります。これらのモデル型は `errors.As` で使用することで展開され、オペレーションの失敗が特定のエラーによるものかどうかを判別できます。例えば、Amazon S3 の `CreateBucket` は、同じ名前のバケットが既に存在する場合に BucketAlreadyExists エラーを返す可能性があります。

例えば、エラーが `BucketAlreadyExists` エラーかどうか確認するには次のようにします。

```
import "log"
import "github.com/aws/aws-sdk-go-v2/service/s3/types"

// ...

if err != nil {
    var bne *types.BucketAlreadyExists
    if errors.As(err, &bne) {
        log.Println("error:", bne)
    }
    return
}
```

すべてのサービス API レスポンスエラーは、smithy.APIError インターフェイス型を実装しています。このインターフェイスを使用すると、モデル化されたエラーレスポンスとそうでないレスポンスの両方を処理できます。この型では、サービスから返されたエラーコードおよびメッセージにアクセスできます。さらにこの型では、エラーの原因がクライアント側にあるかサーバー側にあるかも示します (判明している場合)。

```
import "log"
import "github.com/aws/smithy-go"

// ...

if err != nil {
    var ae smithy.APIError
    if errors.As(err, &ae) {
        log.Printf("code: %s, message: %s, fault: %s", ae.ErrorCode(),
 ae.ErrorMessage(), ae.ErrorFault().String())
    }
    return
}
```

リクエスト ID の取得

AWS サポートへの問い合わせ時には、トラブルシューティングの際にリクエストを識別するリクエスト ID の提供を求められる場合があります。http.ResponseError を使用して ServiceRequestID() メソッドを呼び出すことで、エラーレスポンスに関連付けられたリクエスト ID を取得できます。

```
import "log"
import awshttp "github.com/aws/aws-sdk-go-v2/aws/transport/http"

// ...

if err != nil {
    var re *awshttp.ResponseError
    if errors.As(err, &re) {
        log.Printf("requestID: %s, error: %v", re.ServiceRequestID(), re.Unwrap());
    }
    return
}
```

Amazon S3 リクエスト ID

Amazon S3 リクエストには、AWS サポートによるリクエストのトラブルシューティングに役立つように、追加の ID が含まれています。s3.ResponseError を使用し、ServiceRequestID() および ServiceHostID() を呼び出すことで、リクエスト ID とホスト ID を取得できます。

```
import "log"
```

```
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

if err != nil {
    var re s3.ResponseError
    if errors.As(err, &re) {
        log.Printf("requestID: %s, hostID: %s request failure", re.ServiceRequestID(),
 re.ServiceHostID());
    }
    return
}
```

AWS SDK for Go v2 を用いた AWS サービスを使用する

AWS サービスを呼び出すには、まずサービスクライアントインスタンスを作成する必要があります。サービスクライアントは、そのサービスのすべての API アクションへの低レベルアクセスを提供します。例えば、Amazon S3 の API を呼び出すには、Amazon S3 サービスクライアントを作成します。

サービスオペレーションを呼び出すときは、入力パラメータを構造体として渡します。呼び出しが成功すると、サービス API のレスポンスを含む出力構造体が返されます。例えば、Amazon S3 のバケット作成アクションの呼び出しに成功すると、バケットの場所を含む出力構造体が返されます。

サービスクライアントのリストとそれらのメソッド、パラメータについては、「AWS SDK for Go API リファレンス」を参照してください。

チェックサムによるデータ整合性保護

Amazon Simple Storage Service (Amazon S3) では、オブジェクトをアップロードするときにチェックサムを指定できます。チェックサムを指定すると、そのチェックサムはオブジェクトとともに保存され、オブジェクトのダウンロード時に検証できます。

チェックサムは、ファイルを転送する際のデータの整合性をさらに強化します。チェックサムを使用すると、受信したファイルが元のファイルと一致することを確認することで、データ整合性を検証できます。Amazon S3 でのチェックサムの詳細については、サポート対象アルゴリズムなど、「Amazon Simple Storage Service ユーザーガイド」を参照してください。

ニーズに最適なアルゴリズムを柔軟に選択して、SDK にチェックサムを計算させることができます。または、サポートされているアルゴリズムのいずれかを使用して、事前に計算された独自のチェックサム値を指定することもできます。

> **Note**
>
> Amazon S3 モジュールの v1.74.1 以降、SDK はアップロードの CRC32 チェックサムを自動的に計算することで、デフォルトの整合性保護を提供します。事前計算されたチェックサム値を指定しない場合や、SDK がチェックサムの計算に使用するアルゴリズムを指定しない場合、SDK はこのチェックサムを計算します。
> SDK には、外部で設定できるデータ整合性保護のグローバル設定も用意されています。詳細については、「AWS SDK とツールのリファレンスガイド」を参照してください。

チェックサムについては、オブジェクトのアップロードとオブジェクトのダウンロードという 2 つのリクエストフェーズで説明します。

オブジェクトのアップロード

putObject メソッドを使用してオブジェクトをアップロードし、チェックサムアルゴリズムを指定すると、SDK はそのアルゴリズムに従ってチェックサムを計算します。

次のコードスニペットは、CRC32 チェックサムを含むオブジェクトをアップロードするリクエストを示しています。SDK はリクエストを送信すると、CRC32 チェックサムを計算してオブジェクトをアップロードします。Amazon S3 は、チェックサムを計算し、SDK によって提供されるチェックサムと比較することで、コンテンツの整合性を検証します。次に、Amazon S3 はオブジェクトと共にチェックサムを保存します。

```
out, err := s3Client.PutObject(context.Background(), &s3.PutObjectInput{
     Bucket:            aws.String("bucket"),
     Key:               aws.String("key"),
     ChecksumAlgorithm: types.ChecksumAlgorithmCrc32,
     Body:              strings.NewReader("Hello World"),
 })
```

リクエストでチェックサムアルゴリズムを指定しない場合、チェックサムの動作は、次の表に示すように、使用する SDK のバージョンによって異なります。

チェックサムアルゴリズムが指定されていない場合のチェックサムの動作

AWS SDK for Go の Amazon S3 モジュールバージョン	チェックサムの動作
v1.74.1 より前	SDK は、CRC ベースのチェックサムを自動的に計算してリクエストに含めることはありません。
v1.74.1 以降	SDK は、CRC32 アルゴリズムを使用してチェックサムを計算し、リクエストに含めます。Amazon S3 は、独自の CRC32 チェックサムを計算して転送の整合性を検証し、SDK が提供するチェックサムと比較します。チェック

AWS SDK for Go の Amazon S3 モジュールバージョン	チェックサムの動作
	サムが一致した場合、チェックサムはオブジェクトとともに保存されます。

事前に計算されたチェックサム値を使用してください。

リクエストで事前に計算されたチェックサム値を指定すると、SDK による自動計算が無効になり、代わりに提供された値が使用されます。

次の例は、事前に計算された SHA256 チェックサムを含むリクエストを示しています。

```
out, err := s3Client.PutObject(context.Background(), &s3.PutObjectInput{
     Bucket:        aws.String("bucket"),
     Key:           aws.String("key"),
     ChecksumCRC32: aws.String("checksumvalue"),
     Body:          strings.NewReader("Hello World"),
 })
```

Amazon S3 が、指定されたアルゴリズムのチェックサム値が正しくないと判断した場合、サービスはエラーレスポンスを返します。

マルチパートアップロード

チェックサムはマルチパートアップロードでも使用できます。

AWS SDK for Go には、マルチパートアップロードでチェックサムを使用するための 2 つの方法が用意されています。1 つ目の方法は、アップロードに CRC32 アルゴリズムを指定できる Transfer Manager を使用するものです。

```
s3Client := s3.NewFromConfig(cfg)
     transferManager := manager.NewUploader(s3Client)
     out, err := transferManager.Upload(context.Background(), &s3.PutObjectInput{
             Bucket:            aws.String("bucket"),
             Key:               aws.String("key"),
             Body:              large file to trigger multipart upload,
             ChecksumAlgorithm: types.ChecksumAlgorithmCrc32,
     })
```

アップロードで Transfer Manager を使用する際にチェックサムアルゴリズムを指定しない場合、SDK は CRC32 アルゴリズムに基づいてチェックサムを自動的に計算します。SDK は、SDK のすべてのバージョンに対してこの計算を実行します。

2 つ目の方法は、Amazon S3 クライアントを使用してマルチパートアップロードを実行するものです。このアプローチでチェックサムを指定する場合は、アップロードの開始時に使用するアルゴリズムを指定する必要があります。また、パートリクエストごとにアルゴリズムを指定し、アップロード後にパートごとに計算されたチェックサムを指定する必要があります。

```
s3Client := s3.NewFromConfig(cfg)
     createMultipartUploadOutput, err :=
 s3Client.CreateMultipartUpload(context.Background(), &s3.CreateMultipartUploadInput{
             Bucket:            aws.String("bucket"),
             Key:               aws.String("key"),
             ChecksumAlgorithm: types.ChecksumAlgorithmCrc32,
          })
     if err != nil {
             log.Fatal("err create multipart upload ", err)
     }

     var partsBody []io.Reader // this is just an example parts content, you should
 load your target file in your code
     partNum := int32(1)
     var completedParts []types.CompletedPart
     for _, body := range partsBody {
         uploadPartOutput, err := s3Client.UploadPart(context.Background(),
 &s3.UploadPartInput{
             Bucket:            aws.String("bucket"),
             Key:               aws.String("key"),
             ChecksumAlgorithm: types.ChecksumAlgorithmCrc32,
             Body:              body,
             PartNumber:        aws.Int32(partNum),
             UploadId:          createMultipartUploadOutput.UploadId,
         })
         if err != nil {
             log.Fatal("err upload part ", err)
         }

         completedParts = append(completedParts, types.CompletedPart{
             PartNumber:    aws.Int32(partNum),
             ETag:          uploadPartOutput.ETag,
             ChecksumCRC32: uploadPartOutput.ChecksumCRC32,
         })
```

```
        partNum++
    }

    completeMultipartUploadOutput, err :=
s3Client.CompleteMultipartUpload(context.Background(),
&s3.CompleteMultipartUploadInput{
        Bucket:   aws.String("bucket"),
        Key:      aws.String("key"),
        UploadId: createMultipartUploadOutput.UploadId,
        MultipartUpload: &types.CompletedMultipartUpload{
            Parts: completedParts,
        },
    })
    if err != nil {
        log.Fatal("err complete multipart upload ", err)
    }
```

オブジェクトのダウンロード

GetObject メソッドを使用してオブジェクトをダウンロードする際、GetObjectInput の ChecksumMode フィールドが types.ChecksumModeEnabled に設定されている場合、SDK はチェックサムを自動的に検証します。

次のスニペット内のリクエストは、チェックサムを計算して値を比較することでレスポンス内のチェックサムを検証するよう SDK に指示します。

```
out, err := s3Client.GetObject(context.Background(), &s3.GetObjectInput{
    Bucket:       aws.String("bucket"),
    Key:          aws.String("key"),
    ChecksumMode: types.ChecksumModeEnabled,
 })
```

オブジェクトがチェックサム付きでアップロードされなかった場合、検証は行われません。

AWS SDK for Go ユーティリティの使用

AWS SDK for Go には、AWS サービスをより簡単に使用できるようにするユーティリティが用意されています。これらの SDK ユーティリティは、対応する AWS サービスのパッケージに含まれています。

Amazon RDS ユーティリティ

IAM 認証

auth パッケージは、Amazon RDS MySQL および PostgreSQL データベースインスタンスに接続するための認証トークンを生成するためのユーティリティを提供します。BuildAuthToken メソッドを使用して、データベースエンドポイント、AWS リージョン、ユーザー名、IAM データベース認証に必要なアクセス許可を持つ IAM 認証情報を返す aws.CredentialProvider 実装を指定して、認証トークンを生成できます。IAM 認証を使用した Amazon RDS の設定の詳細については、Amazon RDS デベロッパーガイドの次のリソースを参照してください。

- IAM データベース認証の有効化と無効化
- IAM データベースアクセス用の IAM ポリシーの作成と使用
- IAM 認証を使用したデータベースアカウントの作成

次の例では、Amazon RDS データベースに接続するための認証トークンを生成する方法を示しています。

```
import "context"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/feature/rds/auth"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    panic("configuration error: " + err.Error())
}

authenticationToken, err := auth.BuildAuthToken(
    context.TODO(),
```

```
    "mydb.123456789012.us-east-1.rds.amazonaws.com:3306", // Database Endpoint (With
 Port)
    "us-east-1", // AWS Region
    "jane_doe", // Database Account
    cfg.Credentials,
)
if err != nil {
    panic("failed to create authentication token: " + err.Error())
}
```

Amazon CloudFront ユーティリティ

Amazon CloudFront URL Signer

Amazon CloudFront URL Signer は、署名付き URL の作成プロセスを簡素化します。署名付き URL には、有効期限などの情報が含まれており、コンテンツへのアクセスを制御できます。署名付き URL は、インターネット経由でコンテンツを配信するが、特定のユーザー (課金ユーザーなど) にのみアクセスを制限する場合に便利です。

URL に署名するには、CloudFront キーペア ID と対応するプライベートキーを使用して `URLSigner` インスタンスを作成します。その後、`Sign` または `SignWithPolicy` メソッドを呼び出し、署名対象の URL を指定します。Amazon CloudFront キーペアの詳細については、「CloudFront デベロッパーガイド」の「信頼された署名者の CloudFront キーペアの作成」を参照してください。

次の例では、作成後 1 時間有効な署名付き URL を生成しています。

```
import "github.com/aws/aws-sdk-go-v2/feature/cloudfront/sign"

// ...

signer := sign.NewURLSigner(keyID, privKey)

signedURL, err := signer.Sign(rawURL, time.Now().Add(1*time.Hour))
if err != nil {
    log.Fatalf("Failed to sign url, err: %s\n", err.Error())
    return
}
```

署名ユーティリティの詳細については、「AWS SDK for Go API リファレンス」の「sign パッケージ」を参照してください。

Amazon EC2 インスタンスメタデータサービス

AWS SDK for Go を使用して、Amazon EC2 インスタンスメタデータサービスにアクセスできます。feature/ec2/imds の Go パッケージは、Amazon EC2 インスタンスメタデータサービスにアクセスするための Client 型を提供します。Client および関連するオペレーションは、SDK が提供する他の AWS サービスクライアントと同様に使用できます。SDK の設定方法とサービスクライアントの使用方法の詳細については、「SDK を設定」および「AWS SDK for Go v2 を用いた AWS サービスを使用する」を参照してください。

このクライアントを使用すると、アプリケーションが実行されているインスタンスに関する情報 (AWS リージョンやローカル IP アドレスなど) を簡単に取得できます。通常、インスタンスメタデータを取得するには、HTTP リクエストを作成して送信する必要があります。代わりに、他の AWS サービスと同様にプログラムによるクライアントとして imds.Client を作成し、Amazon EC2 インスタンスメタデータサービスにアクセスします。

例えば、クライアントを作成するには、次のようにします。

```
import "context"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/feature/ec2/imds"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    log.Printf("error: %v", err)
    return
}

client := imds.NewFromConfig(cfg)
```

次に、このサービスクライアントを使用して、local-ipv4 (インスタンスのプライベート IP アドレス) などのメタデータカテゴリから情報を取得します。

```
localIp, err := client.GetMetadata(context.TODO(), &imds.GetMetadataInput{
    Path: "local-ipv4",
})
if err != nil {
    log.Printf("Unable to retrieve the private IP address from the EC2 instance: %s\n",
 err)
    return
```

```
}
content, _ := io.ReadAll(localIp.Content)
fmt.Printf("local-ip: %v\n", string(content))
```

すべてのメタデータカテゴリのリストについては、「Amazon EC2 ユーザーガイド」の「インスタンスメタデータカテゴリ」を参照してください。

Amazon S3 ユーティリティ

Amazon S3 転送マネージャー

Amazon S3 のアップロードおよびダウンロードマネージャーは、大きなオブジェクトを複数のパートに分割して並列で転送できます。これにより、中断された転送を簡単に再開できます。

Amazon S3 アップロードマネージャー

Amazon S3 アップロードマネージャーは、ファイルを小さなパートに分割可能かどうかを判断し、可能な場合は並列でアップロードします。並列アップロードの数とアップロードされるパートのサイズをカスタマイズできます。

次の例では、Amazon S3 `Uploader` を使用してファイルをアップロードします。`Uploader` の使用は `s3.PutObject()` オペレーションと似ています。

```
import "context"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/aws-sdk-go-v2/feature/s3/manager"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    log.Printf("error: %v", err)
    return
}

client := s3.NewFromConfig(cfg)

uploader := manager.NewUploader(client)
result, err := uploader.Upload(context.TODO(), &s3.PutObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("my-object-key"),
```

```
    Body:   uploadFile,
})
```

設定オプション

NewUploader を使用して Uploader インスタンスを作成する際に、アップロード方法をカスタマイズするための設定オプションを指定できます。オプションは、NewUploader に 1 つ以上の引数を渡すことでオーバーライドされます。オプションには以下が含まれます：

- PartSize – アップロードする各パートのバッファサイズをバイト単位で指定します。パートごとの最小サイズは 5 MiB です。
- Concurrency – 並行でアップロードするパートの数を指定します。
- LeavePartsOnError – Amazon S3 に正常にアップロードされたパートを残すかどうかを指定します。

Concurrency の値は、1 回の Upload 呼び出しで可能なパートアップロードの同時実行数の上限を制御します。これはグローバルなクライアント同時実行数の上限ではありません。PartSize と Concurrency の設定値を調整して、最適な設定を見つけることができます。例えば、高帯域幅の接続を備えたシステムでは、送信パートサイズを大きくしたり、並列アップロード数を増やしたりできます。

例えば、アプリケーションで Uploader の Concurrency を 5 に設定したとします。そのアプリケーションが異なる 2 つの goroutine から Upload を呼び出すと、結果は 10 の同時パートアップロード (2 goroutine × 5 Concurrency) になります。

> **Warning**
>
> アプリケーションはリソースの枯渇を防ぐために、Upload の同時呼び出し数を制限することが求められます。

次に示しているのは、Uploader 作成時にデフォルトのパートサイズを設定する例です。

```
uploader := manager.NewUploader(client, func(u *Uploader) {
    u.PartSize = 10 * 1024 * 1024, // 10 MiB
})
```

Uploader とその設定の詳細については、 AWS SDK for Go API リファレンスの「アップローダー」を参照してください。

PutObjectInput 本文フィールド (io.ReadSeeker と io.Reader の比較)

s3.PutObjectInput 構造体の Body フィールドは io.Reader 型です。ただし、ホスト環境でのリソース使用率を最適化するために、このフィールドには、io.ReadSeeker と io.ReaderAt の両方のインターフェイスを実装した型を指定できます。次の例では、両方のインターフェイスを実装した ReadSeekerAt 型を作成しています。

```
type ReadSeekerAt interface {
    io.ReadSeeker
    io.ReaderAt
}
```

io.Reader 型の場合、パートをアップロードする前にリーダーのバイト列をメモリにバッファする必要があります。PartSize または Concurrency の値を増やすと、Uploader に必要なメモリ (RAM) が大幅に増加します。必要なメモリはおよそ *PartSize* × *Concurrency* です。例えば、PartSize に 100 MB、Concurrency に 10 を指定した場合、1 GB 以上が必要になります。

io.Reader 型では、バイトを読み込む前にサイズを判別できないため、Uploader はアップロードするパートの数を計算できません。その結果、PartSize を小さく設定しすぎると、大きなファイルの場合に、Uploader は Amazon S3 のアップロード上限である 10,000 パートに達する可能性があります。10,000 パートを超えてアップロードしようとすると、アップロードは停止し、エラーが返されます。

ReadSeekerAt 型を実装した body 値の場合、Uploader は本文の内容をメモリにバッファせずに Amazon S3 に送信します。Uploader は必要なパート数を計算してから、ファイルを Amazon S3 にアップロードします。PartSize の現在の値でファイルのアップロードに 10,000 を超えるパートが必要になる場合、Uploader はパートサイズの値を増やして、必要なパート数を減らします。

アップロード失敗時の処理

Amazon S3 へのアップロードが失敗した場合、デフォルトでは Uploader が Amazon S3 の AbortMultipartUpload オペレーションを使用して、アップロードされたパートを削除します。この機能により、失敗したアップロードが Amazon S3 のストレージを無駄に消費しないようにできます。

LeavePartsOnError を true に設定することで、Uploader が正常にアップロードされたパートを削除しないようにできます。これは、部分的に完了したアップロードを再開する際に便利です。アップロードされたパートを操作するには、失敗したアップロードの UploadID を取得する必要があります。次の例では、manager.MultiUploadFailure エラーインターフェイス型を使用して UploadID を取得する方法を示しています。

```
result, err := uploader.Upload(context.TODO(), &s3.PutObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("my-object-key"),
    Body:   uploadFile,
})
output, err := u.upload(input)
if err != nil {
    var mu manager.MultiUploadFailure
    if errors.As(err, &mu) {
        // Process error and its associated uploadID
        fmt.Println("Error:", mu)
        _ = mu.UploadID() // retrieve the associated UploadID
    } else {
        // Process error generically
        fmt.Println("Error:", err.Error())
    }
    return
}
```

アップロードごとの Uploader オプションのオーバーライド

Upload を呼び出す際に、1 つ以上の引数を渡すことで、Uploader オプションをオーバーライドできます。これらのオーバーライドは同時実行環境でも安全に実行でき、現在進行中のアップロードやその後の Upload 呼び出しには影響しません。例えば、特定のアップロードリクエストに対して PartSize 設定をオーバーライドするには、次のようにします。

```
params := &s3.PutObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("my-key"),
    Body:   myBody,
}
resp, err := uploader.Upload(context.TODO(), params, func(u *manager.Uploader) {
    u.PartSize = 10 * 1024 * 1024, // 10 MiB
})
```

例

Amazon S3 にフォルダをアップロードする

次の例では、path/filepath パッケージを使用してファイルのリストを再帰的に収集し、指定した Amazon S3 バケットにアップロードしています。Amazon S3 オブジェクトのキーには、ファイルの相対パスがプレフィックスとして付加されます。

```
package main

import (
    "context"
    "log"
    "os"
    "path/filepath"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
    "github.com/aws/aws-sdk-go-v2/service/s3"
)

var (
    localPath string
    bucket    string
    prefix    string
)

func init() {
    if len(os.Args) != 4 {
        log.Fatalln("Usage:", os.Args[0], "<local path> <bucket> <prefix>")
    }
    localPath = os.Args[1]
    bucket = os.Args[2]
    prefix = os.Args[3]
}

func main() {
    walker := make(fileWalk)
    go func() {
        // Gather the files to upload by walking the path recursively
        if err := filepath.Walk(localPath, walker.Walk); err != nil {
            log.Fatalln("Walk failed:", err)
        }
        close(walker)
    }()

    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Fatalln("error:", err)
    }
```

```
    // For each file found walking, upload it to Amazon S3
    uploader := manager.NewUploader(s3.NewFromConfig(cfg))
    for path := range walker {
        rel, err := filepath.Rel(localPath, path)
        if err != nil {
            log.Fatalln("Unable to get relative path:", path, err)
        }
        file, err := os.Open(path)
        if err != nil {
            log.Println("Failed opening file", path, err)
            continue
        }
        defer file.Close()
        result, err := uploader.Upload(context.TODO(), &s3.PutObjectInput{
            Bucket: &bucket,
            Key:    aws.String(filepath.Join(prefix, rel)),
            Body:   file,
        })
        if err != nil {
            log.Fatalln("Failed to upload", path, err)
        }
        log.Println("Uploaded", path, result.Location)
    }
}

type fileWalk chan string

func (f fileWalk) Walk(path string, info os.FileInfo, err error) error {
    if err != nil {
        return err
    }
    if !info.IsDir() {
        f <- path
    }
    return nil
}
```

ダウンロードマネージャー

Amazon S3 Downloader マネージャーは、ファイルを小さなパートに分割可能かどうかを判断し、可能な場合は並列でダウンロードします。並列ダウンロードの数とダウンロードされるパートのサイズをカスタマイズできます。

例: ファイルをダウンロードする

次の例では、Amazon S3 Downloader を使用してファイルをダウンロードしています。Downloader の使用は s3.GetObject オペレーションと似ています。

```
import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/aws-sdk-go-v2/feature/s3/manager"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    log.Println("error:", err)
    return
}

client := s3.NewFromConfig(cfg)

downloader := manager.NewDownloader(client)
numBytes, err := downloader.Download(context.TODO(), downloadFile, &s3.GetObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("my-key"),
})
```

downloadFile パラメータは io.WriterAt 型です。WriterAt インターフェイスを使用して、Downloader はファイルの複数のパートを並列で書き込むことができます。

設定オプション

Downloader インスタンスを作成する際、設定オプションを指定して、オブジェクトのダウンロード方法をカスタマイズできます。

- PartSize – ダウンロードする各パートのバッファサイズをバイト単位で指定します。パートごとの最小サイズは 5 MB です。
- Concurrency – 並行でダウンロードするパートの数を指定します。

Concurrency の値は、1 回の Download 呼び出しで可能なパートダウンロードの同時実行数の上限を制御します。これはグローバルなクライアント同時実行数の上限ではありません。PartSize

と Concurrency の設定値を調整して、最適な設定を見つけることができます。例えば、高帯域幅の接続を備えたシステムでは、受信パートサイズを大きくしたり、並列ダウンロード数を増やしたりできます。

例えば、アプリケーションで Downloader の Concurrency を 5 に設定したとします。そのアプリケーションが異なる 2 つの goroutine から Download を呼び出すと、結果は 10 の同時パートダウンロード (2 goroutine × 5 Concurrency) になります。

> **Warning**
>
> アプリケーションはリソースの枯渇を防ぐために、Download の同時呼び出し数を制限することが求められます。

Downloader とそのその他の設定オプションの詳細については、 AWS SDK for Go API リファレンスの「manage.Downloader」を参照してください。

ダウンロードごとの Downloader オプションのオーバーライド

Download を呼び出すときに、1 つ以上の関数型引数を渡すことで、Downloader オプションをオーバーライドできます。これらのオーバーライドは同時実行環境でも安全に実行でき、現在進行中のダウンロードやその後の Download 呼び出しには影響しません。例えば、特定のアップロードリクエストに対して PartSize 設定をオーバーライドするには、次のようにします。

```
params := &s3.GetObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("my-key"),
}
resp, err := downloader.Download(context.TODO(), targetWriter, params, func(u
 *manager.Downloader) {
    u.PartSize = 10 * 1024 * 1024, // 10 MiB
})
```

例

バケット内のすべてのオブジェクトをダウンロードする

次の例では、ページ分割を使用して Amazon S3 バケットからオブジェクトのリストを収集しています。その後、各オブジェクトをローカルファイルにダウンロードしています。

```
package main
```

```
import (
    "context"
    "fmt"
    "log"
    "os"
    "path/filepath"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
    "github.com/aws/aws-sdk-go-v2/service/s3"
)

var (
    Bucket         = "amzn-s3-demo-bucket" // Download from this bucket
    Prefix         = "logs/"    // Using this key prefix
    LocalDirectory = "s3logs"   // Into this directory
)

func main() {
    cfg, err := config.LoadDefaultConfig(context.TODO())
    if err != nil {
        log.Fatalln("error:", err)
    }

    client := s3.NewFromConfig(cfg)
    manager := manager.NewDownloader(client)

    paginator := s3.NewListObjectsV2Paginator(client, &s3.ListObjectsV2Input{
        Bucket: &Bucket,
        Prefix: &Prefix,
    })

    for paginator.HasMorePages() {
        page, err := paginator.NextPage(context.TODO())
        if err != nil {
            log.Fatalln("error:", err)
        }
        for _, obj := range page.Contents {
            if err := downloadToFile(manager, LocalDirectory, Bucket,
 aws.ToString(obj.Key)); err != nil {
                log.Fatalln("error:", err)
            }
```

```
        }
    }
}

func downloadToFile(downloader *manager.Downloader, targetDirectory, bucket, key
 string) error {
    // Create the directories in the path
    file := filepath.Join(targetDirectory, key)
    if err := os.MkdirAll(filepath.Dir(file), 0775); err != nil {
        return err
    }

    // Set up the local file
    fd, err := os.Create(file)
    if err != nil {
        return err
    }
    defer fd.Close()

    // Download the file using the AWS SDK for Go
    fmt.Printf("Downloading s3://%s/%s to %s...\n", bucket, key, file)
    _, err = downloader.Download(context.TODO(), fd, &s3.GetObjectInput{Bucket:
 &bucket, Key: &key})

    return err
}
```

GetBucketRegion

GetBucketRegion は、Amazon S3 バケットの AWS リージョンの場所を決定するためのユーティリティ関数です。 GetBucketRegion は Amazon S3 クライアントを取得し、それを使用して、クライアントの設定済みリージョンに関連付けられた AWS パーティション内のリクエストされたバケットの場所を決定します。

例えば、バケット *amzn-s3-demo-bucket* のリージョンを見つけるには、次のようにします。

```
cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    log.Println("error:", err)
    return
}

bucket := "amzn-s3-demo-bucket"
```

```
region, err := manager.GetBucketRegion(ctx, s3.NewFromConfig(cfg), bucket)
if err != nil {
    var bnf manager.BucketNotFound
    if errors.As(err, &bnf) {
        log.Printf("unable to find bucket %s's Region\n", bucket)
    } else {
        log.Println("error:", err)
    }
    return
}
fmt.Printf("Bucket %s is in %s region\n", bucket, region)
```

GetBucketRegion がバケットの場所を解決できない場合、例に示すように、この関数は BucketNotFound エラー型を返します。

シーク不可能なストリーミング入力

PutObject や UploadPart などの API オペレーションでは、Amazon S3 クライアントは、入力パラメータ Body の値がデフォルトで io.Seeker インターフェイスを実装していることを前提としています。io.Seeker インターフェイスは、クライアントがアップロードする値の長さを判断したり、リクエスト署名のためのペイロードハッシュを計算したりするために使用されます。Body 入力パラメータ値が io.Seeker を実装していない場合、アプリケーションにはエラーが返されます。

```
operation error S3: PutObject, failed to compute payload hash: failed to seek
body to start, request stream is not seekable
```

この動作は、オペレーションメソッドの ミドルウェア を関数型オプションを使用して変更することで制御できます。WithAPIOptions ヘルパーは、0 個以上のミドルウェアミューテーター用の関数型オプションを返します。クライアントによるペイロードハッシュの計算を無効にし、署名なしペイロードリクエスト署名を使用するには、v4.SwapComputePayloadSHA256ForUnsignedPayloadMiddleware を追加します。

```
resp, err := client.PutObject(context.TODO(), &s3.PutObjectInput{
    Bucket: &bucketName,
    Key: &objectName,
    Body: bytes.NewBuffer([]byte(`example object!`)),
    ContentLength: 15, // length of body
}, s3.WithAPIOptions(
    v4.SwapComputePayloadSHA256ForUnsignedPayloadMiddleware,
))
```

> **Warning**
>
> Amazon S3 では、オブジェクトをバケットにアップロードするすべてのオペレーションで、ContentLength を指定する必要があります。Body 入力パラメータが `io.Seeker` インターフェイスを実装していないため、クライアントはリクエストに必要な `ContentLength` パラメータを計算できません。このパラメータはアプリケーションが指定する必要があります。`ContentLength` パラメータが指定されていない場合、リクエストは失敗します。
> シーク不可能で長さが不明なアップロードには、SDK の Amazon S3 アップロードマネージャー を使用してください。

ミドルウェアを使用した AWS SDK for Go v2 クライアントリクエストのカスタマイズ

> **Warning**
>
> クライアントのリクエストパイプラインを変更すると、リクエストが不正または無効になったり、予期しないアプリケーションエラーが発生したりする可能性があります。この機能は、SDK インターフェイスがデフォルトで提供していない高度なユースケース向けです。

AWS SDK for Go クライアントリクエストは、サービスオペレーションのスタックに 1 つ以上のミドルウェアを登録することでカスタマイズできます。スタックは、Initialize、Serialize、Build、Finalize、Deserialize の一連のステップで構成されます。各ステップには、そのステップの入力/出力型に対して処理を実行するミドルウェアが 0 個以上含まれます。次の図と表では、オペレーションのリクエストおよびレスポンスがスタックをどのように通過するかの概要を示しています。

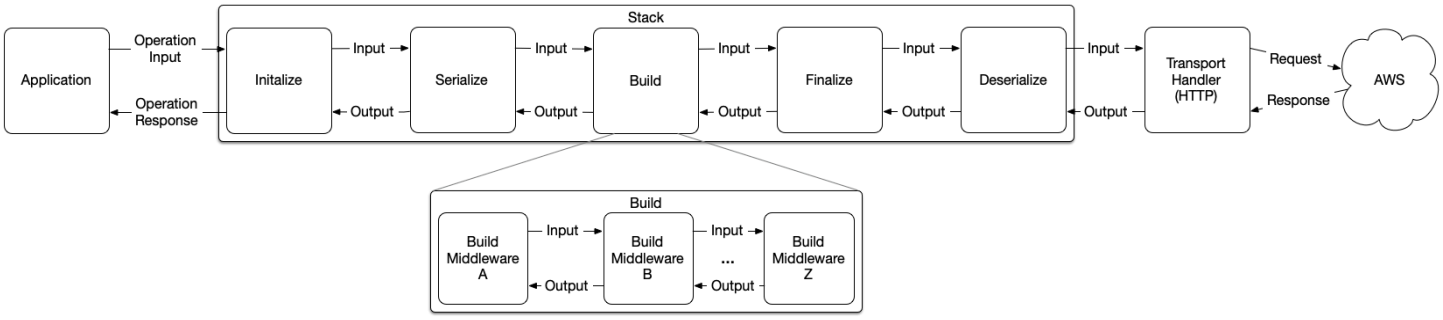

スタックステップ	説明
Initialize	入力を準備し、必要に応じてデフォルトのパラメータを設定します。
Serialize	入力を対象のトランスポート層に適したプロトコル形式にシリアル化します。
Build	HTTP Content-Length などの追加のメタデータをシリアル化済みの入力にアタッチします。

スタックステップ	説明
Finalize	再試行や認証 (SigV4 署名) を含む最終的なメッセージの準備を行います。
Deserialize	プロトコル形式のレスポンスを構造化された型またはエラーに逆シリアル化します。

各ステップ内のミドルウェアには、そのミドルウェアの ID メソッドによって決まる一意の ID が必要です。ミドルウェアの ID により、同じミドルウェアがステップに重複して登録されるのを防ぎ、他のミドルウェアをその相対位置に挿入できるようになっています。

ステップミドルウェアは、ステップの `Insert` または `Add` メソッドを使用してアタッチします。`Add` を使用すると、RelativePosition に middleware.Before を指定すればステップの先頭に、middleware.After を指定すれば末尾に、ミドルウェアをアタッチできます。`Insert` を使用すると、別のミドルウェアに対して相対的な位置にミドルウェアをアタッチできます。

> **Warning**
>
> カスタムのステップミドルウェアを安全に挿入するには、`Add` メソッドを使用する必要があります。`Insert` を使用すると、カスタムミドルウェアと、相対挿入先となる他のミドルウェアとの間に依存関係が作成されます。アプリケーションの互換性を保つため、スタックステップ内のミドルウェアはブラックボックスとして扱う必要があります。

カスタムミドルウェアの記述

各スタックステップには対応するインターフェイスがあり、ミドルウェアをアタッチするにはそのインターフェイスを実装する必要があります。提供されている *Step*`MiddlewareFunc` 関数を使用すれば、このインターフェイスをすばやく実装できます。次の表では、各ステップ、そのインターフェイス、およびインターフェイスを実装するためのヘルパー関数の概要を示しています。

Step	インターフェイス	ヘルパー関数
Initialize	InitializeMiddleware	InitializeMiddlewareFunc
Build	BuildMiddleware	BuildMiddlewareFunc

Step	インターフェイス	ヘルパー関数
Serialize	SerializeMiddleware	SerializeMiddlewareFunc
Finalize	FinalizeMiddleware	FinalizeMiddlewareFunc
Deserialize	DeserializeMiddleware	DeserializeMiddlewareFunc

次の例では、Amazon S3 の GetObject API コールで Bucket メンバーが指定されていない場合に、その値を設定するカスタムミドルウェアの記述方法を示しています。このミドルウェアは、後続の例でスタックへのステップミドルウェアのアタッチ方法を示すために使用します。

```
import "github.com/aws/smithy-go/aws"
import "github.com/aws/smithy-go/middleware"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

var defaultBucket = middleware.InitializeMiddlewareFunc("DefaultBucket", func(
    ctx context.Context, in middleware.InitializeInput, next
 middleware.InitializeHandler,
) (
    out middleware.InitializeOutput, metadata middleware.Metadata, err error,
) {
    // Type switch to check if the input is s3.GetObjectInput, if so and the bucket is
 not set, populate it with
    // our default.
    switch v := in.Parameters.(type) {
    case *s3.GetObjectInput:
        if v.Bucket == nil {
            v.Bucket = aws.String("amzn-s3-demo-bucket")
        }
    }

    // Middleware must call the next middleware to be executed in order to continue
 execution of the stack.
    // If an error occurs, you can return to prevent further execution.
    return next.HandleInitialize(ctx, in)
})
```

すべてのクライアントへのミドルウェアのアタッチ

カスタムステップミドルウェアは、aws.Config 型の APIOptions メンバーを使用して追加することで、すべてのクライアントにアタッチできます。次の例では、アプリケーションの aws.Config オブジェクトを使用して作成されるすべてのクライアントに defaultBucket ミドルウェアをアタッチしています。

```
import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/smithy-go/middleware"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    // handle error
}

cfg.APIOptions = append(cfg.APIOptions, func(stack *middleware.Stack) error {
    // Attach the custom middleware to the beginning of the Initialize step
    return stack.Initialize.Add(defaultBucket, middleware.Before)
})

client := s3.NewFromConfig(cfg)
```

特定のオペレーションへのミドルウェアのアタッチ

カスタムのステップミドルウェアは、オペレーションの可変長引数リストを使用して、クライアントの APIOptions メンバーを変更することで、特定のクライアントオペレーションにアタッチできます。次の例では、Amazon S3 の特定の GetObject オペレーション呼び出しに defaultBucket ミドルウェアをアタッチしています。

```
import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/smithy-go/middleware"

// ...
```

```
// registerDefaultBucketMiddleware registers the defaultBucket middleware with the
 provided stack.
func registerDefaultBucketMiddleware(stack *middleware.Stack) error {
    // Attach the custom middleware to the beginning of the Initialize step
    return stack.Initialize.Add(defaultBucket, middleware.Before)
}

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    // handle error
}

client := s3.NewFromConfig(cfg)

object, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
    Key: aws.String("my-key"),
}, func(options *s3.Options) {
    // Register the defaultBucketMiddleware for this operation only
    options.APIOptions = append(options.APIOptions, registerDefaultBucketMiddleware)
})
```

スタック下層へのメタデータの受け渡し

状況によっては、複数のミドルウェアが情報や状態を共有して連携する必要がある場合があります。このようなメタデータの受け渡しには、context.Context と middleware.WithStackValue を使用できます。middleware.WithStackValue は指定されたキーと値のペアを指定されたコンテキストにアタッチし、そのスコープを現在実行中のスタックに安全に限定します。このスタックスコープ付きの値は、対応するキーを middleware.GetStackValue に渡すことでコンテキストから取得できます。キーは比較可能である必要があり、衝突を避けるために独自の型をコンテキストキーとして定義する必要があります。次の例では、2 つのミドルウェアが context.Context を使用してスタック内で情報を受け渡す方法を示しています。

```
import "context"
import "github.com/aws/smithy-go/middleware"

// ...

type customKey struct {}
```

```
func GetCustomKey(ctx context.Context) (v string) {
    v, _ = middleware.GetStackValue(ctx, customKey{}).(string)
    return v
}

func SetCustomKey(ctx context.Context, value string) context.Context {
    return middleware.WithStackValue(ctx, customKey{}, value)
}

// ...

var customInitalize = middleware.InitializeMiddlewareFunc("customInitialize", func(
    ctx context.Context, in middleware.InitializeInput, next
 middleware.InitializeHandler,
) (
    out middleware.InitializeOutput, metadata middleware.Metadata, err error,
) {
    ctx = SetCustomKey(ctx, "my-custom-value")

    return next.HandleInitialize(ctx, in)
})

var customBuild = middleware.BuildMiddlewareFunc("customBuild", func(
    ctx context.Context, in middleware.BuildInput, next middleware.BuildHandler,
) (
    out middleware.BuildOutput, metadata middleware.Metadata, err error,
) {
    customValue := GetCustomKey(ctx)

    // use customValue

    return next.HandleBuild(ctx, in)
})
```

SDK が提供するメタデータ

AWS SDK for Go では、指定されたコンテキストから取得できるメタデータ値がいくつか用意されています。これらの値を使用すると、実行中のサービスやオペレーション、対象リージョンに応じて動作を変更する、より動的なミドルウェアを記述できます。使用可能ないくつかのキーを次の表に示します。

キー	リトリーバー	説明
ServiceID	GetServiceID	実行中のスタックに対応するサービス ID を取得します。この ID は、サービスクライアントパッケージの `ServiceID` 定数と比較できます。
OperationName	GetOperationName	実行中のスタックに対応するオペレーション名を取得します。
ロガー	GetLogger	ミドルウェアからのメッセージのログ記録に使用できるロガーを取得します。

スタック上層へのメタデータの受け渡し

middleware.Metadata を使用してメタデータのキーと値のペアを追加することで、スタックの上層にメタデータを渡すことができます。各ミドルウェアステップは、出力構造体、メタデータ、エラーを返します。カスタムミドルウェアは、ステップ内の次のハンドラーを呼び出して受け取ったメタデータを必ず返す必要があります。これにより、下流のミドルウェアが追加したメタデータが、サービスオペレーションを呼び出したアプリケーションに確実に伝播されます。最終的なメタデータは、`ResultMetadata` 構造体メンバーを介して、オペレーションの出力型から呼び出し元アプリケーションが参照できます。

次の例では、オペレーション出力の一部として返されるメタデータをカスタムミドルウェアがどのように追加するかを示しています。

```
import "context"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/smithy-go/middleware"

// ...

type customKey struct{}

func GetCustomKey(metadata middleware.Metadata) (v string) {
```

```
    v, _ = metadata.Get(customKey{}).(string)
    return v
}

func SetCustomKey(metadata *middleware.Metadata, value string) {
    metadata.Set(customKey{}, value)
}

// ...

var customInitalize = middleware.InitializeMiddlewareFunc("customInitialize", func (
    ctx context.Context, in middleware.InitializeInput, next
 middleware.InitializeHandler,
) (
    out middleware.InitializeOutput, metadata middleware.Metadata, err error,
) {
    out, metadata, err = next.HandleInitialize(ctx, in)
    if err != nil {
        return out, metadata, err
    }

    SetCustomKey(&metadata, "my-custom-value")

    return out, metadata, nil
})

// ...

client := s3.NewFromConfig(cfg, func (options *s3.Options) {
    options.APIOptions = append(options.APIOptions, func(stack *middleware.Stack) error
 {
        return stack.Initialize.Add(customInitalize, middleware.After)
    })
})

out, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
    // input parameters
})
if err != nil {
    // handle error
}

customValue := GetCustomKey(out.ResponseMetadata)
```

よくある質問

SDK の HTTP クライアントを設定するにはどうすればよいですか? ガイドラインやベストプラクティスはありますか?

お客様のワークロードに最適な HTTP ワークフロー設定方法について、具体的なガイダンスは提供できません。この質問への回答は複数の要因 (以下を含むが、それらに限定されない) によって決まります。

- アプリケーションのネットワーク負荷 (TPS、スループットなど)
- 使用中のサービス
- デプロイのコンピューティング特性
- デプロイの地理的特性
- アプリケーションに必要な動作やアプリケーション自体の要件 (SLA、タイミングなど)

オペレーションのタイムアウトはどう設定すればよいですか?

前の質問と同様、状況によります。ここで考慮すべき要素は次のとおりです。

- HTTP クライアント設定に関する上記のすべての要因
- 独自のアプリケーションのタイミングや SLA 制約 (例: 他のユーザーにトラフィックを提供している場合)

この質問に対する答えを、上流の挙動に基づく単なる経験則から導くべきではありません。例えば、「このオペレーションを 1,000 回実行したところ最大で 5 秒かかったので、安全係数を 2 倍としてタイムアウトを 10 秒に設定する」というような考え方です。環境条件は変化し、サービスが一時的に低下することもあるため、このような前提は予告なく通用しなくなる可能性があります。

SDK によるリクエストがタイムアウトする、または処理に時間がかかりすぎる場合、どうすればよいですか?

ネットワーク通信に時間がかかることによるオペレーション呼び出しの遅延やタイムアウトについては、サポートしかねます。SDK での「ネットワーク通信時間」は、次のいずれかの処理時間を指します。

- SDK クライアントの HTTPClient.Do() メソッド内で費やされた時間
- 呼び出し元に転送された HTTP レスポンス本文の Read() で費やされた時間 (例: GetObject)

オペレーションのレイテンシーやタイムアウトによる問題が発生している場合は、まず SDK のオペレーションライフサイクルのテレメトリを取得し、ネットワーク通信時間とその前後のオーバーヘッド時間の内訳を把握する必要があります。この目的に役立つ再利用可能なコードスニペットについては、SDK オペレーションのタイミング計測に関するガイドを参照してください。

read: connection reset エラーを修正するにはどうすればよいですか?

SDK は、connection reset パターンに一致するエラーが発生した場合、そのオペレーションをデフォルトで再試行します。これにより、HTTP レスポンスが完全に読み取られ、モデル化された結果型に逆シリアル化される大半のオペレーションで、エラー処理が可能になります。

ただし、このエラーは再試行ループの外で発生することがあります。例えば、一部のサービスオペレーションでは API の HTTP レスポンス本文が io.ReadCloser を通じて呼び出し元に直接転送され、ネットワークから直接読み取られる場合があります (例: GetObject のオブジェクトペイロード)。レスポンス本文に対して Read を実行する際に、このエラーが発生することがあります。

このエラーは、レスポンスの読み取り中にホスト、サービス、または中間機器 (NAT ゲートウェイ、プロキシ、ロードバランサーなど) が接続を切断したことを示しています。

このエラーは複数の理由で発生する可能性があります。

- サービスオペレーションの呼び出し後、レスポンスを受信してから、しばらくの間レスポンス本文を読み取らなかった。このタイプのオペレーションでは、HTTP レスポンス本文をできるだけ早く読み取ることをお勧めします。
- 以前に受信したレスポンス本文をクローズしていなかった。これにより、特定のプラットフォームで接続がリセットされる可能性があります。オペレーションのレスポンスで提供される **io.ReadCloser** インスタンスは、その内容を使用するかどうかにかかわらず、必ずクローズしてください。

さらに、影響を受ける接続に対して、ネットワークの境界 (例: 管理下にあるプロキシの後ろ) で tcpdump を実行してみてください。 AWS エンドポイントが TCP RST を送信しているように見える場合は、 AWS サポートコンソールを使用して、問題のあるサービスに対するケースを開く必要が

あります。その際は、問題が発生したリクエスト ID や具体的なタイムスタンプを提供できるように準備してください。

HTTP プロキシを SDK で使用しているときに「invalid signature」(無効な署名) エラーが発生するのはなぜですか?

AWS サービスの署名アルゴリズム (通常は sigv4) は、シリアル化されたリクエストのヘッダー、つまり というプレフィックスが付いたほとんどのヘッダーに関連付けられていますX-。プロキシは送信リクエストを変更してしまう傾向があり、追加の転送情報 (多くの場合 X-Forwarded-For ヘッダー経由) を挿入することで、SDK が計算した署名を実質的に無効化してしまいます。

HTTP プロキシを使用していて署名エラーが発生する場合は、プロキシから送信される時点でのリクエストをキャプチャし、変更がないか判断する必要があります。

SDK オペレーションのタイミング計測

SDK でタイムアウトやレイテンシーの問題をデバッグする際には、オペレーションのライフサイクル内で想定以上に実行時間がかかっている構成要素を特定することが重要です。通常まずは、オペレーション全体の呼び出しと HTTP 呼び出しとの間でのタイミングの内訳を調べる必要があります。

次のサンプルプログラムでは、SQS クライアント用の smithy-go ミドルウェアとして基本的な計測プローブを実装し、その使用方法を示しています。このプローブは、オペレーション呼び出しごとに次の情報を出力します。

- AWS リクエスト ID
- サービス ID
- オペレーション名
- オペレーション呼び出し時間
- http 呼び出し時間

出力される各メッセージには、オペレーションごとに一意の「呼び出し ID」がプレフィックスとして付加され、この ID はハンドラースタックの開始時に設定されます。

計測のエントリーポイントは WithOperationTiming として公開されています。これは、計測「イベント」をフォーマット済みの文字列として受け取るメッセージ処理関数を引数として受け取れるように、パラメータ化されています。PrintfMSGHandler は、そのメッセージを標準出力にそのまま表示するための簡易的なラッパーです。

ここで使用しているサービスは他のものに置き換え可能です。すべてのサービスクライアントのオプションは APIOptions と HTTPClient を設定として受け付けます。例えば、WithOperationTiming は次のように宣言することもできます。

```
func WithOperationTiming(msgHandler func(string)) func(*s3.Options)
func WithOperationTiming(msgHandler func(string)) func(*dynamodb.Options)
// etc.
```

変更する場合は、返される関数のシグネチャも必ず合わせて変更してください。

```
import (
    "context"
    "fmt"
    "log"
    "net/http"
    "sync"
    "time"

    awsmiddleware "github.com/aws/aws-sdk-go-v2/aws/middleware"
    awshttp "github.com/aws/aws-sdk-go-v2/aws/transport/http"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/sqs"
    "github.com/aws/smithy-go/middleware"
    smithyrand "github.com/aws/smithy-go/rand"
)

// WithOperationTiming instruments an SQS client to dump timing information for
// the following spans:
//   - overall operation time
//   - HTTPClient call time
//
// This instrumentation will also emit the request ID, service name, and
// operation name for each invocation.
//
// Accepts a message "handler" which is invoked with formatted messages to be
// handled externally, you can use the declared PrintfMSGHandler to simply dump
// these values to stdout.
func WithOperationTiming(msgHandler func(string)) func(*sqs.Options) {
    return func(o *sqs.Options) {
        o.APIOptions = append(o.APIOptions, addTimingMiddlewares(msgHandler))
        o.HTTPClient = &timedHTTPClient{
            client:     awshttp.NewBuildableClient(),
            msgHandler: msgHandler,
```

```
        }
    }
}

// PrintfMSGHandler writes messages to stdout.
func PrintfMSGHandler(msg string) {
    fmt.Printf("%s\n", msg)
}

type invokeIDKey struct{}

func setInvokeID(ctx context.Context, id string) context.Context {
    return middleware.WithStackValue(ctx, invokeIDKey{}, id)
}

func getInvokeID(ctx context.Context) string {
    id, _ := middleware.GetStackValue(ctx, invokeIDKey{}).(string)
    return id
}

// Records the current time, and returns a function to be called when the
// target span of events is completed. The return function will emit the given
// span name and time elapsed to the given message consumer.
func timeSpan(ctx context.Context, name string, consumer func(string)) func() {
    start := time.Now()
    return func() {
        elapsed := time.Now().Sub(start)
        consumer(fmt.Sprintf("[%s] %s: %s", getInvokeID(ctx), name, elapsed))
    }
}

type timedHTTPClient struct {
    client     *awshttp.BuildableClient
    msgHandler func(string)
}

func (c *timedHTTPClient) Do(r *http.Request) (*http.Response, error) {
    defer timeSpan(r.Context(), "http", c.msgHandler)()

    resp, err := c.client.Do(r)
    if err != nil {
        return nil, fmt.Errorf("inner client do: %v", err)
    }
```

```
    return resp, nil
}

type addInvokeIDMiddleware struct {
    msgHandler func(string)
}

func (*addInvokeIDMiddleware) ID() string { return "addInvokeID" }

func (*addInvokeIDMiddleware) HandleInitialize(ctx context.Context, in
 middleware.InitializeInput, next middleware.InitializeHandler) (
    out middleware.InitializeOutput, md middleware.Metadata, err error,
) {
    id, err := smithyrand.NewUUID(smithyrand.Reader).GetUUID()
    if err != nil {
        return out, md, fmt.Errorf("new uuid: %v", err)
    }

    return next.HandleInitialize(setInvokeID(ctx, id), in)
}

type timeOperationMiddleware struct {
    msgHandler func(string)
}

func (*timeOperationMiddleware) ID() string { return "timeOperation" }

func (m *timeOperationMiddleware) HandleInitialize(ctx context.Context, in
 middleware.InitializeInput, next middleware.InitializeHandler) (
    middleware.InitializeOutput, middleware.Metadata, error,
) {
    defer timeSpan(ctx, "operation", m.msgHandler)()
    return next.HandleInitialize(ctx, in)
}

type emitMetadataMiddleware struct {
    msgHandler func(string)
}

func (*emitMetadataMiddleware) ID() string { return "emitMetadata" }

func (m *emitMetadataMiddleware) HandleInitialize(ctx context.Context, in
 middleware.InitializeInput, next middleware.InitializeHandler) (
    middleware.InitializeOutput, middleware.Metadata, error,
```

```
) {
    out, md, err := next.HandleInitialize(ctx, in)

    invokeID := getInvokeID(ctx)
    requestID, _ := awsmiddleware.GetRequestIDMetadata(md)
    service := awsmiddleware.GetServiceID(ctx)
    operation := awsmiddleware.GetOperationName(ctx)
    m.msgHandler(fmt.Sprintf(`[%s] requestID = "%s"`, invokeID, requestID))
    m.msgHandler(fmt.Sprintf(`[%s] service   = "%s"`, invokeID, service))
    m.msgHandler(fmt.Sprintf(`[%s] operation = "%s"`, invokeID, operation))

    return out, md, err
}

func addTimingMiddlewares(mh func(string)) func(*middleware.Stack) error {
    return func(s *middleware.Stack) error {
        if err := s.Initialize.Add(&timeOperationMiddleware{msgHandler: mh},
 middleware.Before); err != nil {
            return fmt.Errorf("add time operation middleware: %v", err)
        }
        if err := s.Initialize.Add(&addInvokeIDMiddleware{msgHandler: mh},
 middleware.Before); err != nil {
            return fmt.Errorf("add invoke id middleware: %v", err)
        }
        if err := s.Initialize.Insert(&emitMetadataMiddleware{msgHandler: mh},
 "RegisterServiceMetadata", middleware.After); err != nil {
            return fmt.Errorf("add emit metadata middleware: %v", err)
        }
        return nil
    }
}

func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        log.Fatal(fmt.Errorf("load default config: %v", err))
    }

    svc := sqs.NewFromConfig(cfg, WithOperationTiming(PrintfMSGHandler))

    var wg sync.WaitGroup

    for i := 0; i < 6; i++ {
        wg.Add(1)
```

```
        go func() {
            defer wg.Done()

            _, err = svc.ListQueues(context.Background(), nil)
            if err != nil {
                fmt.Println(fmt.Errorf("list queues: %v", err))
            }
        }()
    }
    wg.Wait()
}
```

このプログラムのサンプル出力:

```
[e9a801bb-c51d-45c8-8e9f-a202e263fde8] http: 192.24067ms
[e9a801bb-c51d-45c8-8e9f-a202e263fde8] requestID = "dbee3082-96a3-5b23-
adca-6d005696fa94"
[e9a801bb-c51d-45c8-8e9f-a202e263fde8] service   = "SQS"
[e9a801bb-c51d-45c8-8e9f-a202e263fde8] operation = "ListQueues"
[e9a801bb-c51d-45c8-8e9f-a202e263fde8] operation: 193.098393ms
[0740f0e0-953e-4328-94fc-830a5052e763] http: 195.185732ms
[0740f0e0-953e-4328-94fc-830a5052e763] requestID = "48b301fa-
fc9f-5f1f-9007-5c783caa9322"
[0740f0e0-953e-4328-94fc-830a5052e763] service   = "SQS"
[0740f0e0-953e-4328-94fc-830a5052e763] operation = "ListQueues"
[0740f0e0-953e-4328-94fc-830a5052e763] operation: 195.725491ms
[c0589832-f351-4cc7-84f1-c656eb79dbd7] http: 200.52383ms
[444030d0-6743-4de5-bd91-bc40b2b94c55] http: 200.525919ms
[c0589832-f351-4cc7-84f1-c656eb79dbd7] requestID = "4a73cc82-b47b-56e1-
b327-9100744e1b1f"
[c0589832-f351-4cc7-84f1-c656eb79dbd7] service   = "SQS"
[c0589832-f351-4cc7-84f1-c656eb79dbd7] operation = "ListQueues"
[c0589832-f351-4cc7-84f1-c656eb79dbd7] operation: 201.214365ms
[444030d0-6743-4de5-bd91-bc40b2b94c55] requestID = "ca1523ed-1879-5610-
bf5d-7e6fd84cabee"
[444030d0-6743-4de5-bd91-bc40b2b94c55] service   = "SQS"
[444030d0-6743-4de5-bd91-bc40b2b94c55] operation = "ListQueues"
[444030d0-6743-4de5-bd91-bc40b2b94c55] operation: 201.197071ms
[079e8dbd-bb93-43ab-89e5-a7bb392b86a5] http: 206.449568ms
[12b2b39d-df86-4648-a436-ff0482d13340] http: 206.526603ms
[079e8dbd-bb93-43ab-89e5-a7bb392b86a5] requestID = "64229710-b552-56ed-8f96-
ca927567ec7b"
[079e8dbd-bb93-43ab-89e5-a7bb392b86a5] service   = "SQS"
```

```
[079e8dbd-bb93-43ab-89e5-a7bb392b86a5] operation = "ListQueues"
[079e8dbd-bb93-43ab-89e5-a7bb392b86a5] operation: 207.252357ms
[12b2b39d-df86-4648-a436-ff0482d13340] requestID =
 "76d9cbc0-07aa-58aa-98b7-9642c79f9851"
[12b2b39d-df86-4648-a436-ff0482d13340] service   = "SQS"
[12b2b39d-df86-4648-a436-ff0482d13340] operation = "ListQueues"
[12b2b39d-df86-4648-a436-ff0482d13340] operation: 207.360621ms
```

AWS SDK for Go v2 を使用したユニットテスト

アプリケーションで SDK を使用する場合は、アプリケーションのユニットテスト用に SDK をモック化します。SDK をモック化すると、SDK の内部動作ではなく、アプリケーションのテスト対象に集中できます。

モック化をサポートするには、具象型 (サービスクライアントやページネーター、ウェーターなど) ではなく、Go のインターフェイス (`s3.Client` など) を使用します。これにより、依存関係インジェクションなどのパターンを使用して、アプリケーションロジックをテストできるようになります。

クライアントオペレーションのモック化

この例では、`S3GetObjectAPI` は `GetObjectFromS3` 関数に必要な一連の Amazon S3 API オペレーションを定義するインターフェイスです。`S3GetObjectAPI` は、Amazon S3 クライアントの GetObject メソッドによって実装されます。

```
import "context"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

type S3GetObjectAPI interface {
    GetObject(ctx context.Context, params *s3.GetObjectInput,
 optFns ...func(*s3.Options)) (*s3.GetObjectOutput, error)
}

func GetObjectFromS3(ctx context.Context, api S3GetObjectAPI, bucket, key string)
 ([]byte, error) {
    object, err := api.GetObject(ctx, &s3.GetObjectInput{
        Bucket: &bucket,
        Key:    &key,
    })
    if err != nil {
        return nil, err
    }
    defer object.Body.Close()

    return ioutil.ReadAll(object.Body)
}
```

GetObjectFromS3 関数をテストするには、mockGetObjectAPI を使用して S3GetObjectAPI インターフェイスを実装します。その後、mockGetObjectAPI 型を使用して、サービスクライアントから返される出力とエラーレスポンスをモック化します。

```
import "testing"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

type mockGetObjectAPI func(ctx context.Context, params *s3.GetObjectInput,
 optFns ...func(*s3.Options)) (*s3.GetObjectOutput, error)

func (m mockGetObjectAPI) GetObject(ctx context.Context, params *s3.GetObjectInput,
 optFns ...func(*s3.Options)) (*s3.GetObjectOutput, error) {
    return m(ctx, params, optFns...)
}

func TestGetObjectFromS3(t *testing.T) {
    cases := []struct {
        client func(t *testing.T) S3GetObjectAPI
        bucket string
        key string
        expect []byte
    }{
        {
            client: func(t *testing.T) S3GetObjectAPI {
                return mockGetObjectAPI(func(ctx context.Context, params
 *s3.GetObjectInput, optFns ...func(*s3.Options)) (*s3.GetObjectOutput, error) {
                    t.Helper()
                    if params.Bucket == nil {
                        t.Fatal("expect bucket to not be nil")
                    }
                    if e, a := "fooBucket", *params.Bucket; e != a {
                        t.Errorf("expect %v, got %v", e, a)
                    }
                    if params.Key == nil {
                        t.Fatal("expect key to not be nil")
                    }
                    if e, a := "barKey", *params.Key; e != a {
                        t.Errorf("expect %v, got %v", e, a)
                    }

                    return &s3.GetObjectOutput{
```

```
                        Body: ioutil.NopCloser(bytes.NewReader([]byte("this is the body
 foo bar baz"))),
                    }, nil
                })
            },
            bucket: "amzn-s3-demo-bucket>",
            key:    "barKey",
            expect: []byte("this is the body foo bar baz"),
        },
    }

    for i, tt := range cases {
        t.Run(strconv.Itoa(i), func(t *testing.T) {
            ctx := context.TODO()
            content, err := GetObjectFromS3(ctx, tt.client(t), tt.bucket, tt.key)
            if err != nil {
                t.Fatalf("expect no error, got %v", err)
            }
            if e, a := tt.expect, content; bytes.Compare(e, a) != 0 {
                t.Errorf("expect %v, got %v", e, a)
            }
        })
    }
}
```

ページネーターのモック化

サービスクライアントと同様に、ページネーターも Go インターフェイスを定義することでモック化できます。このインターフェイスはアプリケーションのコードから使用されます。これにより、アプリケーションの実行時には SDK の実装を使用し、テスト時にはモック実装を利用できます。

次の例では、`ListObjectsV2Pager` は `CountObjects` 関数に必要な Amazon S3 ListObjectsV2Paginator の動作を定義するインターフェイスです。

```
import "context"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

type ListObjectsV2Pager interface {
    HasMorePages() bool
    NextPage(context.Context, ...func(*s3.Options)) (*s3.ListObjectsV2Output, error)
```

```
}

func CountObjects(ctx context.Context, pager ListObjectsV2Pager) (count int, err error)
 {
    for pager.HasMorePages() {
        var output *s3.ListObjectsV2Output
        output, err = pager.NextPage(ctx)
        if err != nil {
            return count, err
        }
        count += int(output.KeyCount)
    }
    return count, nil
}
```

CountObjects をテストするには、ListObjectsV2Pager インターフェイスを実装するように mockListObjectsV2Pager 型を作成します。その後、mockListObjectsV2Pager を使用して、サービスオペレーションのページネーターからの出力とエラーレスポンスのページング動作を再現します。

```
import "context"
import  "fmt"
import "testing"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

type mockListObjectsV2Pager struct {
    PageNum int
    Pages   []*s3.ListObjectsV2Output
}

func (m *mockListObjectsV2Pager) HasMorePages() bool {
    return m.PageNum < len(m.Pages)
}

func (m *mockListObjectsV2Pager) NextPage(ctx context.Context, f ...func(*s3.Options))
 (output *s3.ListObjectsV2Output, err error) {
    if m.PageNum >= len(m.Pages) {
        return nil, fmt.Errorf("no more pages")
    }
    output = m.Pages[m.PageNum]
    m.PageNum++
```

```
    return output, nil
}

func TestCountObjects(t *testing.T) {
    pager := &mockListObjectsV2Pager{
        Pages: []*s3.ListObjectsV2Output{
            {
                KeyCount: 5,
            },
            {
                KeyCount: 10,
            },
            {
                KeyCount: 15,
            },
        },
    }
    objects, err := CountObjects(context.TODO(), pager)
    if err != nil {
        t.Fatalf("expect no error, got %v", err)
    }
    if expect, actual := 30, objects; expect != actual {
        t.Errorf("expect %v, got %v", expect, actual)
    }
}
```

SDK for Go V2 のコード例

このトピックのコード例は、 で AWS SDK for Go V2 を使用する方法を示しています AWS。

基本 は、重要なオペレーションをサービス内で実行する方法を示すコード例です。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

シナリオは、1 つのサービス内から、または他の AWS のサービスと組み合わせて複数の関数を呼び出し、特定のタスクを実行する方法を示すコード例です。

一部のサービスには、サービス固有のライブラリや関数の活用方法を示す追加のカテゴリ例が含まれています。

サービス

- SDK for Go V2 を使用した API Gateway の例
- SDK for Go V2 を使用した Aurora の例
- SDK for Go V2 を使用する Amazon Bedrock の例
- SDK for Go V2 を使用した Amazon Bedrock ランタイムの例
- CloudFormation SDK for Go V2 を使用した の例
- SDK for Go V2 を使用した CloudWatch Logs のコード例
- SDK for Go V2 を使用する Amazon Cognito ID プロバイダーの例
- SDK for Go V2 を使用した Amazon DocumentDB の例
- SDK for Go V2 を使用した DynamoDB の例
- Go V2 を使用した IAM の例
- SDK for Go V2 を使用した Kinesis の例
- SDK for Go V2 を使用した Lambda の例
- SDK for Go V2 を使用した Amazon MSK の例
- SDK for Go V2 を使用したパートナーセントラルのコード例
- SDK for Go V2 を使用した Amazon RDS の例
- SDK for Go V2 を使用した Amazon Redshift の例
- SDK for Go V2 を使用した Amazon S3 の例

- SDK for Go V2 を使用した Amazon SNS の例
- SDK for Go V2 を使用した Amazon SQS の例

SDK for Go V2 を使用した API Gateway の例

次のコード例は、API Gateway で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

AWS コミュニティへの貢献は、複数のチームによって作成され、維持されている例です AWS。フィードバックを提供するには、リンクされたリポジトリで提供されているメカニズムを使用します。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- AWS コミュニティへの貢献

AWS コミュニティへの貢献

サーバーレスアプリケーションの構築とテスト

次のコード例は、Lambda および DynamoDB を備えた API Gateway を使用してサーバーレスアプリケーションを構築およびテストする方法を示しています。

SDK for Go V2

Go SDK を使用し、Lambda および DynamoDB を備えた API Gateway で構成されるサーバーレスアプリケーションを構築およびテストする方法が示されます。

完全なソースコードとセットアップおよび実行の手順については、GitHub で完全な例を参照してください。

この例で使用されているサービス

- API ゲートウェイ
- DynamoDB
- Lambda

SDK for Go V2 を使用した Aurora の例

次のコード例は、Aurora で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

基本 は、重要なオペレーションをサービス内で実行する方法を示すコード例です。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- はじめに
- 基本
- アクション

はじめに

Hello Aurora

次のコード例は、Aurora の使用を開始する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "fmt"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/rds"
)

// main uses the AWS SDK for Go V2 to create an Amazon Aurora client and list up to
 20
// DB clusters in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 auroraClient := rds.NewFromConfig(sdkConfig)
 const maxClusters = 20
 fmt.Printf("Let's list up to %v DB clusters.\n", maxClusters)
 output, err := auroraClient.DescribeDBClusters(
  ctx, &rds.DescribeDBClustersInput{MaxRecords: aws.Int32(maxClusters)})
 if err != nil {
  fmt.Printf("Couldn't list DB clusters: %v\n", err)
  return
 }
 if len(output.DBClusters) == 0 {
  fmt.Println("No DB clusters found.")
 } else {
  for _, cluster := range output.DBClusters {
   fmt.Printf("DB cluster %v has database %v.\n", *cluster.DBClusterIdentifier,
    *cluster.DatabaseName)
  }
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeDBClusters」を参照してください。

基本

基本を学ぶ

次のコード例は、以下の操作方法を示しています。

- カスタム Aurora DB クラスターパラメータグループを作成し、パラメータ値を設定します。
- パラメータグループを使用する DB クラスターを作成する
- データベースを含む DB インスタンスを作成します。
- DB クラスターのスナップショットを作成して、リソースをクリーンアップします。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

コマンドプロンプトからインタラクティブなシナリオを実行します。

```
import (
 "aurora/actions"
 "context"
 "fmt"
 "log"
 "slices"
 "sort"
 "strconv"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/google/uuid"
)
```

```
// GetStartedClusters is an interactive example that shows you how to use the AWS
 SDK for Go
// with Amazon Aurora to do the following:
//
// 1. Create a custom DB cluster parameter group and set parameter values.
// 2. Create an Aurora DB cluster that is configured to use the parameter group.
// 3. Create a DB instance in the DB cluster that contains a database.
// 4. Take a snapshot of the DB cluster.
// 5. Delete the DB instance, DB cluster, and parameter group.
type GetStartedClusters struct {
 sdkConfig  aws.Config
 dbClusters actions.DbClusters
 questioner demotools.IQuestioner
 helper     IScenarioHelper
 isTestRun  bool
}

// NewGetStartedClusters constructs a GetStartedClusters instance from a
 configuration.
// It uses the specified config to get an Amazon Relational Database Service (Amazon
 RDS)
// client and create wrappers for the actions used in the scenario.
func NewGetStartedClusters(sdkConfig aws.Config, questioner demotools.IQuestioner,
 helper IScenarioHelper) GetStartedClusters {
 auroraClient := rds.NewFromConfig(sdkConfig)
 return GetStartedClusters{
  sdkConfig:  sdkConfig,
  dbClusters: actions.DbClusters{AuroraClient: auroraClient},
  questioner: questioner,
  helper:     helper,
 }
}

// Run runs the interactive scenario.
func (scenario GetStartedClusters) Run(ctx context.Context, dbEngine string,
 parameterGroupName string,
 clusterName string, dbName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
  }
 }()

 log.Println(strings.Repeat("-", 88))
```

```
 log.Println("Welcome to the Amazon Aurora DB Cluster demo.")
 log.Println(strings.Repeat("-", 88))

 parameterGroup := scenario.CreateParameterGroup(ctx, dbEngine, parameterGroupName)
 scenario.SetUserParameters(ctx, parameterGroupName)
 cluster := scenario.CreateCluster(ctx, clusterName, dbEngine, dbName,
 parameterGroup)
 scenario.helper.Pause(5)
 dbInstance := scenario.CreateInstance(ctx, cluster)
 scenario.DisplayConnection(cluster)
 scenario.CreateSnapshot(ctx, clusterName)
 scenario.Cleanup(ctx, dbInstance, cluster, parameterGroup)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}

// CreateParameterGroup shows how to get available engine versions for a specified
// database engine and create a DB cluster parameter group that is compatible with a
// selected engine family.
func (scenario GetStartedClusters) CreateParameterGroup(ctx context.Context,
 dbEngine string,
 parameterGroupName string) *types.DBClusterParameterGroup {

 log.Printf("Checking for an existing DB cluster parameter group named %v.\n",
  parameterGroupName)
 parameterGroup, err := scenario.dbClusters.GetParameterGroup(ctx,
 parameterGroupName)
 if err != nil {
  panic(err)
 }
 if parameterGroup == nil {
  log.Printf("Getting available database engine versions for %v.\n", dbEngine)
  engineVersions, err := scenario.dbClusters.GetEngineVersions(ctx, dbEngine, "")
  if err != nil {
   panic(err)
  }

  familySet := map[string]struct{}{}
  for _, family := range engineVersions {
   familySet[*family.DBParameterGroupFamily] = struct{}{}
  }
  var families []string
```

```
  for family := range familySet {
   families = append(families, family)
  }
  sort.Strings(families)
  familyIndex := scenario.questioner.AskChoice("Which family do you want to use?\n",
 families)
  log.Println("Creating a DB cluster parameter group.")
  _, err = scenario.dbClusters.CreateParameterGroup(
   ctx, parameterGroupName, families[familyIndex], "Example parameter group.")
  if err != nil {
   panic(err)
  }
  parameterGroup, err = scenario.dbClusters.GetParameterGroup(ctx,
 parameterGroupName)
  if err != nil {
   panic(err)
  }
 }
 log.Printf("Parameter group %v:\n", *parameterGroup.DBParameterGroupFamily)
 log.Printf("\tName: %v\n", *parameterGroup.DBClusterParameterGroupName)
 log.Printf("\tARN: %v\n", *parameterGroup.DBClusterParameterGroupArn)
 log.Printf("\tFamily: %v\n", *parameterGroup.DBParameterGroupFamily)
 log.Printf("\tDescription: %v\n", *parameterGroup.Description)
 log.Println(strings.Repeat("-", 88))
 return parameterGroup

}

// SetUserParameters shows how to get the parameters contained in a custom parameter
// group and update some of the parameter values in the group.
func (scenario GetStartedClusters) SetUserParameters(ctx context.Context,
 parameterGroupName string) {
 log.Println("Let's set some parameter values in your parameter group.")
 dbParameters, err := scenario.dbClusters.GetParameters(ctx, parameterGroupName, "")
 if err != nil {
  panic(err)
 }
 var updateParams []types.Parameter
 for _, dbParam := range dbParameters {
  if strings.HasPrefix(*dbParam.ParameterName, "auto_increment") &&
   *dbParam.IsModifiable && *dbParam.DataType == "integer" {
   log.Printf("The %v parameter is described as:\n\t%v",
    *dbParam.ParameterName, *dbParam.Description)
   rangeSplit := strings.Split(*dbParam.AllowedValues, "-")
```

```
    lower, _ := strconv.Atoi(rangeSplit[0])
    upper, _ := strconv.Atoi(rangeSplit[1])
    newValue := scenario.questioner.AskInt(
     fmt.Sprintf("Enter a value between %v and %v:", lower, upper),
     demotools.InIntRange{Lower: lower, Upper: upper})
    dbParam.ParameterValue = aws.String(strconv.Itoa(newValue))
    updateParams = append(updateParams, dbParam)
   }
  }
  err = scenario.dbClusters.UpdateParameters(ctx, parameterGroupName, updateParams)
  if err != nil {
   panic(err)
  }
  log.Println("You can get a list of parameters you've set by specifying a source of
  'user'.")
  userParameters, err := scenario.dbClusters.GetParameters(ctx, parameterGroupName,
  "user")
  if err != nil {
   panic(err)
  }
  log.Println("Here are the parameters you've set:")
  for _, param := range userParameters {
   log.Printf("\t%v: %v\n", *param.ParameterName, *param.ParameterValue)
  }
  log.Println(strings.Repeat("-", 88))
}

// CreateCluster shows how to create an Aurora DB cluster that contains a database
// of a specified type. The database is also configured to use a custom DB cluster
// parameter group.
func (scenario GetStartedClusters) CreateCluster(ctx context.Context, clusterName
 string, dbEngine string,
 dbName string, parameterGroup *types.DBClusterParameterGroup) *types.DBCluster {

 log.Println("Checking for an existing DB cluster.")
 cluster, err := scenario.dbClusters.GetDbCluster(ctx, clusterName)
 if err != nil {
  panic(err)
 }
 if cluster == nil {
  adminUsername := scenario.questioner.Ask(
   "Enter an administrator user name for the database: ", demotools.NotEmpty{})
  adminPassword := scenario.questioner.Ask(
```

```
    "Enter a password for the administrator (at least 8 characters): ",
  demotools.NotEmpty{})
   engineVersions, err := scenario.dbClusters.GetEngineVersions(ctx, dbEngine,
  *parameterGroup.DBParameterGroupFamily)
   if err != nil {
    panic(err)
   }
   var engineChoices []string
   for _, engine := range engineVersions {
    engineChoices = append(engineChoices, *engine.EngineVersion)
   }
   log.Println("The available engines for your parameter group are:")
   engineIndex := scenario.questioner.AskChoice("Which engine do you want to use?\n",
  engineChoices)
   log.Printf("Creating DB cluster %v and database %v.\n", clusterName, dbName)
   log.Printf("The DB cluster is configured to use\nyour custom parameter group %v
 \n",
    *parameterGroup.DBClusterParameterGroupName)
   log.Printf("and selected engine %v.\n", engineChoices[engineIndex])
   log.Println("This typically takes several minutes.")
   cluster, err = scenario.dbClusters.CreateDbCluster(
    ctx, clusterName, *parameterGroup.DBClusterParameterGroupName, dbName, dbEngine,
    engineChoices[engineIndex], adminUsername, adminPassword)
   if err != nil {
    panic(err)
   }
   for *cluster.Status != "available" {
    scenario.helper.Pause(30)
    cluster, err = scenario.dbClusters.GetDbCluster(ctx, clusterName)
    if err != nil {
     panic(err)
    }
    log.Println("Cluster created and available.")
   }
  }
  log.Println("Cluster data:")
  log.Printf("\tDBClusterIdentifier: %v\n", *cluster.DBClusterIdentifier)
  log.Printf("\tARN: %v\n", *cluster.DBClusterArn)
  log.Printf("\tStatus: %v\n", *cluster.Status)
  log.Printf("\tEngine: %v\n", *cluster.Engine)
  log.Printf("\tEngine version: %v\n", *cluster.EngineVersion)
  log.Printf("\tDBClusterParameterGroup: %v\n", *cluster.DBClusterParameterGroup)
  log.Printf("\tEngineMode: %v\n", *cluster.EngineMode)
  log.Println(strings.Repeat("-", 88))
```

```
 return cluster
}

// CreateInstance shows how to create a DB instance in an existing Aurora DB
 cluster.
// A new DB cluster contains no DB instances, so you must add one. The first DB
 instance
// that is added to a DB cluster defaults to a read-write DB instance.
func (scenario GetStartedClusters) CreateInstance(ctx context.Context, cluster
 *types.DBCluster) *types.DBInstance {
 log.Println("Checking for an existing database instance.")
 dbInstance, err := scenario.dbClusters.GetInstance(ctx,
 *cluster.DBClusterIdentifier)
 if err != nil {
  panic(err)
 }
 if dbInstance == nil {
  log.Println("Let's create a database instance in your DB cluster.")
  log.Println("First, choose a DB instance type:")
  instOpts, err := scenario.dbClusters.GetOrderableInstances(
   ctx, *cluster.Engine, *cluster.EngineVersion)
  if err != nil {
   panic(err)
  }
  var instChoices []string
  for _, opt := range instOpts {
   instChoices = append(instChoices, *opt.DBInstanceClass)
  }
  slices.Sort(instChoices)
  instChoices = slices.Compact(instChoices)
  instIndex := scenario.questioner.AskChoice(
   "Which DB instance class do you want to use?\n", instChoices)
  log.Println("Creating a database instance. This typically takes several minutes.")
  dbInstance, err = scenario.dbClusters.CreateInstanceInCluster(
   ctx, *cluster.DBClusterIdentifier, *cluster.DBClusterIdentifier, *cluster.Engine,
   instChoices[instIndex])
  if err != nil {
   panic(err)
  }
  for *dbInstance.DBInstanceStatus != "available" {
   scenario.helper.Pause(30)
   dbInstance, err = scenario.dbClusters.GetInstance(ctx,
 *cluster.DBClusterIdentifier)
   if err != nil {
```

```
    panic(err)
   }
  }
 }
 log.Println("Instance data:")
 log.Printf("\tDBInstanceIdentifier: %v\n", *dbInstance.DBInstanceIdentifier)
 log.Printf("\tARN: %v\n", *dbInstance.DBInstanceArn)
 log.Printf("\tStatus: %v\n", *dbInstance.DBInstanceStatus)
 log.Printf("\tEngine: %v\n", *dbInstance.Engine)
 log.Printf("\tEngine version: %v\n", *dbInstance.EngineVersion)
 log.Println(strings.Repeat("-", 88))
 return dbInstance
}

// DisplayConnection displays connection information about an Aurora DB cluster and
 tips
// on how to connect to it.
func (scenario GetStartedClusters) DisplayConnection(cluster *types.DBCluster) {
 log.Println(
  "You can now connect to your database using your favorite MySql client.\n" +
   "One way to connect is by using the 'mysql' shell on an Amazon EC2 instance\n" +
   "that is running in the same VPC as your database cluster. Pass the endpoint,\n"
 +
   "port, and administrator user name to 'mysql' and enter your password\n" +
   "when prompted:")
 log.Printf("\n\tmysql -h %v -P %v -u %v -p\n",
  *cluster.Endpoint, *cluster.Port, *cluster.MasterUsername)
 log.Println("For more information, see the User Guide for Aurora:\n" +
  "\thttps://docs.aws.amazon.com/AmazonRDS/latest/AuroraUserGuide/
CHAP_GettingStartedAurora.CreatingConnecting.Aurora.html#CHAP_GettingStartedAurora.Aurora.Co
 log.Println(strings.Repeat("-", 88))
}

// CreateSnapshot shows how to create a DB cluster snapshot and wait until it's
 available.
func (scenario GetStartedClusters) CreateSnapshot(ctx context.Context, clusterName
 string) {
 if scenario.questioner.AskBool(
  "Do you want to create a snapshot of your DB cluster (y/n)? ", "y") {
  snapshotId := fmt.Sprintf("%v-%v", clusterName, scenario.helper.UniqueId())
  log.Printf("Creating a snapshot named %v. This typically takes a few minutes.\n",
 snapshotId)
  snapshot, err := scenario.dbClusters.CreateClusterSnapshot(ctx, clusterName,
 snapshotId)
```

```
  if err != nil {
   panic(err)
  }
  for *snapshot.Status != "available" {
   scenario.helper.Pause(30)
   snapshot, err = scenario.dbClusters.GetClusterSnapshot(ctx, snapshotId)
   if err != nil {
    panic(err)
   }
  }
  log.Println("Snapshot data:")
  log.Printf("\tDBClusterSnapshotIdentifier: %v\n",
 *snapshot.DBClusterSnapshotIdentifier)
  log.Printf("\tARN: %v\n", *snapshot.DBClusterSnapshotArn)
  log.Printf("\tStatus: %v\n", *snapshot.Status)
  log.Printf("\tEngine: %v\n", *snapshot.Engine)
  log.Printf("\tEngine version: %v\n", *snapshot.EngineVersion)
  log.Printf("\tDBClusterIdentifier: %v\n", *snapshot.DBClusterIdentifier)
  log.Printf("\tSnapshotCreateTime: %v\n", *snapshot.SnapshotCreateTime)
  log.Println(strings.Repeat("-", 88))
 }
}

// Cleanup shows how to clean up a DB instance, DB cluster, and DB cluster parameter
 group.
// Before the DB cluster parameter group can be deleted, all associated DB instances
 and
// DB clusters must first be deleted.
func (scenario GetStartedClusters) Cleanup(ctx context.Context, dbInstance
 *types.DBInstance, cluster *types.DBCluster,
 parameterGroup *types.DBClusterParameterGroup) {

 if scenario.questioner.AskBool(
  "\nDo you want to delete the database instance, DB cluster, and parameter group
 (y/n)? ", "y") {
  log.Printf("Deleting database instance %v.\n", *dbInstance.DBInstanceIdentifier)
  err := scenario.dbClusters.DeleteInstance(ctx, *dbInstance.DBInstanceIdentifier)
  if err != nil {
   panic(err)
  }
  log.Printf("Deleting database cluster %v.\n", *cluster.DBClusterIdentifier)
  err = scenario.dbClusters.DeleteDbCluster(ctx, *cluster.DBClusterIdentifier)
  if err != nil {
   panic(err)
```

```
  }
  log.Println(
   "Waiting for the DB instance and DB cluster to delete. This typically takes
 several minutes.")
  for dbInstance != nil || cluster != nil {
   scenario.helper.Pause(30)
   if dbInstance != nil {
    dbInstance, err = scenario.dbClusters.GetInstance(ctx,
 *dbInstance.DBInstanceIdentifier)
    if err != nil {
     panic(err)
    }
   }
   if cluster != nil {
    cluster, err = scenario.dbClusters.GetDbCluster(ctx,
 *cluster.DBClusterIdentifier)
    if err != nil {
     panic(err)
    }
   }
  }
  log.Printf("Deleting parameter group %v.",
 *parameterGroup.DBClusterParameterGroupName)
  err = scenario.dbClusters.DeleteParameterGroup(ctx,
 *parameterGroup.DBClusterParameterGroupName)
  if err != nil {
   panic(err)
  }
 }
}

// IScenarioHelper abstracts the function from a scenario so that it
// can be mocked for unit testing.
type IScenarioHelper interface {
 Pause(secs int)
 UniqueId() string
}
type ScenarioHelper struct{}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 time.Sleep(time.Duration(secs) * time.Second)
}
```

```
// UniqueId returns a new UUID.
func (helper ScenarioHelper) UniqueId() string {
 return uuid.New().String()
}
```

Aurora アクションを管理するためにシナリオによって呼び出される関数を定義します。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}


// GetParameterGroup gets a DB cluster parameter group by name.
func (clusters *DbClusters) GetParameterGroup(ctx context.Context,
 parameterGroupName string) (
 *types.DBClusterParameterGroup, error) {
 output, err := clusters.AuroraClient.DescribeDBClusterParameterGroups(
  ctx, &rds.DescribeDBClusterParameterGroupsInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  var notFoundError *types.DBParameterGroupNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("Parameter group %v does not exist.\n", parameterGroupName)
   err = nil
  } else {
   log.Printf("Error getting parameter group %v: %v\n", parameterGroupName, err)
  }
  return nil, err
 } else {
```

```
  return &output.DBClusterParameterGroups[0], err
 }
}


// CreateParameterGroup creates a DB cluster parameter group that is based on the
 specified
// parameter group family.
func (clusters *DbClusters) CreateParameterGroup(
 ctx context.Context, parameterGroupName string, parameterGroupFamily string,
 description string) (
 *types.DBClusterParameterGroup, error) {

 output, err := clusters.AuroraClient.CreateDBClusterParameterGroup(ctx,
  &rds.CreateDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   DBParameterGroupFamily:      aws.String(parameterGroupFamily),
   Description:                 aws.String(description),
  })
 if err != nil {
  log.Printf("Couldn't create parameter group %v: %v\n", parameterGroupName, err)
  return nil, err
 } else {
  return output.DBClusterParameterGroup, err
 }
}



// DeleteParameterGroup deletes the named DB cluster parameter group.
func (clusters *DbClusters) DeleteParameterGroup(ctx context.Context,
 parameterGroupName string) error {
 _, err := clusters.AuroraClient.DeleteDBClusterParameterGroup(ctx,
  &rds.DeleteDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  log.Printf("Couldn't delete parameter group %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}
```

```
// GetParameters gets the parameters that are contained in a DB cluster parameter
 group.
func (clusters *DbClusters) GetParameters(ctx context.Context, parameterGroupName
 string, source string) (
 []types.Parameter, error) {

 var output *rds.DescribeDBClusterParametersOutput
 var params []types.Parameter
 var err error
 parameterPaginator :=
 rds.NewDescribeDBClusterParametersPaginator(clusters.AuroraClient,
  &rds.DescribeDBClusterParametersInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Source:                      aws.String(source),
  })
 for parameterPaginator.HasMorePages() {
  output, err = parameterPaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get paramaeters for %v: %v\n", parameterGroupName, err)
   break
  } else {
   params = append(params, output.Parameters...)
  }
 }
 return params, err
}



// UpdateParameters updates parameters in a named DB cluster parameter group.
func (clusters *DbClusters) UpdateParameters(ctx context.Context, parameterGroupName
 string, params []types.Parameter) error {
 _, err := clusters.AuroraClient.ModifyDBClusterParameterGroup(ctx,
  &rds.ModifyDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Parameters:                  params,
  })
 if err != nil {
  log.Printf("Couldn't update parameters in %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
```

```
 }
}



// GetDbCluster gets data about an Aurora DB cluster.
func (clusters *DbClusters) GetDbCluster(ctx context.Context, clusterName string)
 (*types.DBCluster, error) {
 output, err := clusters.AuroraClient.DescribeDBClusters(ctx,
  &rds.DescribeDBClustersInput{
   DBClusterIdentifier: aws.String(clusterName),
  })
 if err != nil {
  var notFoundError *types.DBClusterNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB cluster %v does not exist.\n", clusterName)
   err = nil
  } else {
   log.Printf("Couldn't get DB cluster %v: %v\n", clusterName, err)
  }
  return nil, err
 } else {
  return &output.DBClusters[0], err
 }
}



// CreateDbCluster creates a DB cluster that is configured to use the specified
 parameter group.
// The newly created DB cluster contains a database that uses the specified engine
 and
// engine version.
func (clusters *DbClusters) CreateDbCluster(ctx context.Context, clusterName string,
 parameterGroupName string,
 dbName string, dbEngine string, dbEngineVersion string, adminName string,
 adminPassword string) (
 *types.DBCluster, error) {

 output, err := clusters.AuroraClient.CreateDBCluster(ctx,
 &rds.CreateDBClusterInput{
  DBClusterIdentifier:         aws.String(clusterName),
  Engine:                      aws.String(dbEngine),
  DBClusterParameterGroupName: aws.String(parameterGroupName),
```

```
  DatabaseName:                aws.String(dbName),
  EngineVersion:               aws.String(dbEngineVersion),
  MasterUserPassword:          aws.String(adminPassword),
  MasterUsername:              aws.String(adminName),
 })
 if err != nil {
  log.Printf("Couldn't create DB cluster %v: %v\n", clusterName, err)
  return nil, err
 } else {
  return output.DBCluster, err
 }
}



// DeleteDbCluster deletes a DB cluster without keeping a final snapshot.
func (clusters *DbClusters) DeleteDbCluster(ctx context.Context, clusterName string)
 error {
 _, err := clusters.AuroraClient.DeleteDBCluster(ctx, &rds.DeleteDBClusterInput{
  DBClusterIdentifier: aws.String(clusterName),
  SkipFinalSnapshot:   aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete DB cluster %v: %v\n", clusterName, err)
  return err
 } else {
  return nil
 }
}



// CreateClusterSnapshot creates a snapshot of a DB cluster.
func (clusters *DbClusters) CreateClusterSnapshot(ctx context.Context, clusterName
 string, snapshotName string) (
 *types.DBClusterSnapshot, error) {
 output, err := clusters.AuroraClient.CreateDBClusterSnapshot(ctx,
 &rds.CreateDBClusterSnapshotInput{
  DBClusterIdentifier:         aws.String(clusterName),
  DBClusterSnapshotIdentifier: aws.String(snapshotName),
 })
 if err != nil {
  log.Printf("Couldn't create snapshot %v: %v\n", snapshotName, err)
  return nil, err
```

```
 } else {
  return output.DBClusterSnapshot, nil
 }
}



// GetClusterSnapshot gets a DB cluster snapshot.
func (clusters *DbClusters) GetClusterSnapshot(ctx context.Context, snapshotName
 string) (*types.DBClusterSnapshot, error) {
 output, err := clusters.AuroraClient.DescribeDBClusterSnapshots(ctx,
  &rds.DescribeDBClusterSnapshotsInput{
   DBClusterSnapshotIdentifier: aws.String(snapshotName),
  })
 if err != nil {
  log.Printf("Couldn't get snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return &output.DBClusterSnapshots[0], nil
 }
}



// CreateInstanceInCluster creates a database instance in an existing DB cluster.
 The first database that is
// created defaults to a read-write DB instance.
func (clusters *DbClusters) CreateInstanceInCluster(ctx context.Context, clusterName
 string, instanceName string,
 dbEngine string, dbInstanceClass string) (*types.DBInstance, error) {
 output, err := clusters.AuroraClient.CreateDBInstance(ctx,
 &rds.CreateDBInstanceInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBClusterIdentifier:  aws.String(clusterName),
  Engine:               aws.String(dbEngine),
  DBInstanceClass:      aws.String(dbInstanceClass),
 })
 if err != nil {
  log.Printf("Couldn't create instance %v: %v\n", instanceName, err)
  return nil, err
 } else {
  return output.DBInstance, nil
 }
}
```

```
// GetInstance gets data about a DB instance.
func (clusters *DbClusters) GetInstance(ctx context.Context, instanceName string) (
 *types.DBInstance, error) {
 output, err := clusters.AuroraClient.DescribeDBInstances(ctx,
  &rds.DescribeDBInstancesInput{
   DBInstanceIdentifier: aws.String(instanceName),
  })
 if err != nil {
  var notFoundError *types.DBInstanceNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB instance %v does not exist.\n", instanceName)
   err = nil
  } else {
   log.Printf("Couldn't get instance %v: %v\n", instanceName, err)
  }
  return nil, err
 } else {
  return &output.DBInstances[0], nil
 }
}



// DeleteInstance deletes a DB instance.
func (clusters *DbClusters) DeleteInstance(ctx context.Context, instanceName string)
 error {
 _, err := clusters.AuroraClient.DeleteDBInstance(ctx, &rds.DeleteDBInstanceInput{
  DBInstanceIdentifier:   aws.String(instanceName),
  SkipFinalSnapshot:      aws.Bool(true),
  DeleteAutomatedBackups: aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete instance %v: %v\n", instanceName, err)
  return err
 } else {
  return nil
 }
}
```

```
// GetEngineVersions gets database engine versions that are available for the
 specified engine
// and parameter group family.
func (clusters *DbClusters) GetEngineVersions(ctx context.Context, engine string,
 parameterGroupFamily string) (
 []types.DBEngineVersion, error) {
 output, err := clusters.AuroraClient.DescribeDBEngineVersions(ctx,
  &rds.DescribeDBEngineVersionsInput{
   Engine:                 aws.String(engine),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
  })
 if err != nil {
  log.Printf("Couldn't get engine versions for %v: %v\n", engine, err)
  return nil, err
 } else {
  return output.DBEngineVersions, nil
 }
}



// GetOrderableInstances uses a paginator to get DB instance options that can be
 used to create DB instances that are
// compatible with a set of specifications.
func (clusters *DbClusters) GetOrderableInstances(ctx context.Context, engine
 string, engineVersion string) (
 []types.OrderableDBInstanceOption, error) {

 var output *rds.DescribeOrderableDBInstanceOptionsOutput
 var instances []types.OrderableDBInstanceOption
 var err error
 orderablePaginator :=
 rds.NewDescribeOrderableDBInstanceOptionsPaginator(clusters.AuroraClient,
  &rds.DescribeOrderableDBInstanceOptionsInput{
   Engine:        aws.String(engine),
   EngineVersion: aws.String(engineVersion),
  })
 for orderablePaginator.HasMorePages() {
  output, err = orderablePaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get orderable DB instances: %v\n", err)
   break
  } else {
   instances = append(instances, output.OrderableDBInstanceOptions...)
```

```
  }
 }
 return instances, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - CreateDBCluster
  - CreateDBClusterParameterGroup
  - CreateDBClusterSnapshot
  - CreateDBInstance
  - DeleteDBCluster
  - DeleteDBClusterParameterGroup
  - DeleteDBInstance
  - DescribeDBClusterParameterGroups
  - DescribeDBClusterParameters
  - DescribeDBClusterSnapshots
  - DescribeDBClusters
  - DescribeDBEngineVersions
  - DescribeDBInstances
  - DescribeOrderableDBInstanceOptions
  - ModifyDBClusterParameterGroup

アクション

`CreateDBCluster`

次のコード例は、`CreateDBCluster` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// CreateDbCluster creates a DB cluster that is configured to use the specified
 parameter group.
// The newly created DB cluster contains a database that uses the specified engine
 and
// engine version.
func (clusters *DbClusters) CreateDbCluster(ctx context.Context, clusterName string,
 parameterGroupName string,
 dbName string, dbEngine string, dbEngineVersion string, adminName string,
 adminPassword string) (
 *types.DBCluster, error) {

 output, err := clusters.AuroraClient.CreateDBCluster(ctx,
 &rds.CreateDBClusterInput{
  DBClusterIdentifier:         aws.String(clusterName),
  Engine:                      aws.String(dbEngine),
  DBClusterParameterGroupName: aws.String(parameterGroupName),
  DatabaseName:                aws.String(dbName),
```

```
  EngineVersion:               aws.String(dbEngineVersion),
  MasterUserPassword:          aws.String(adminPassword),
  MasterUsername:              aws.String(adminName),
 })
 if err != nil {
  log.Printf("Couldn't create DB cluster %v: %v\n", clusterName, err)
  return nil, err
 } else {
  return output.DBCluster, err
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateDBCluster」を参照してください。

`CreateDBClusterParameterGroup`

次のコード例は、`CreateDBClusterParameterGroup` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
```

```
 AuroraClient *rds.Client
}



// CreateParameterGroup creates a DB cluster parameter group that is based on the
 specified
// parameter group family.
func (clusters *DbClusters) CreateParameterGroup(
 ctx context.Context, parameterGroupName string, parameterGroupFamily string,
 description string) (
 *types.DBClusterParameterGroup, error) {

 output, err := clusters.AuroraClient.CreateDBClusterParameterGroup(ctx,
  &rds.CreateDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   DBParameterGroupFamily:      aws.String(parameterGroupFamily),
   Description:                 aws.String(description),
  })
 if err != nil {
  log.Printf("Couldn't create parameter group %v: %v\n", parameterGroupName, err)
  return nil, err
 } else {
  return output.DBClusterParameterGroup, err
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateDBClusterParameterGroup」を参照してください。

`CreateDBClusterSnapshot`

次のコード例は、`CreateDBClusterSnapshot` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// CreateClusterSnapshot creates a snapshot of a DB cluster.
func (clusters *DbClusters) CreateClusterSnapshot(ctx context.Context, clusterName
 string, snapshotName string) (
 *types.DBClusterSnapshot, error) {
 output, err := clusters.AuroraClient.CreateDBClusterSnapshot(ctx,
 &rds.CreateDBClusterSnapshotInput{
  DBClusterIdentifier:         aws.String(clusterName),
  DBClusterSnapshotIdentifier: aws.String(snapshotName),
 })
 if err != nil {
  log.Printf("Couldn't create snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return output.DBClusterSnapshot, nil
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「CreateDBClusterSnapshot」を参照してください。

`CreateDBInstance`

次のコード例は、`CreateDBInstance` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// CreateInstanceInCluster creates a database instance in an existing DB cluster.
 The first database that is
// created defaults to a read-write DB instance.
func (clusters *DbClusters) CreateInstanceInCluster(ctx context.Context, clusterName
 string, instanceName string,
 dbEngine string, dbInstanceClass string) (*types.DBInstance, error) {
```

```
 output, err := clusters.AuroraClient.CreateDBInstance(ctx,
 &rds.CreateDBInstanceInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBClusterIdentifier:  aws.String(clusterName),
  Engine:               aws.String(dbEngine),
  DBInstanceClass:      aws.String(dbInstanceClass),
 })
 if err != nil {
  log.Printf("Couldn't create instance %v: %v\n", instanceName, err)
  return nil, err
 } else {
  return output.DBInstance, nil
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateDBInstance」を参照してください。

`DeleteDBCluster`

次のコード例は、`DeleteDBCluster` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
```

```
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// DeleteDbCluster deletes a DB cluster without keeping a final snapshot.
func (clusters *DbClusters) DeleteDbCluster(ctx context.Context, clusterName string)
 error {
 _, err := clusters.AuroraClient.DeleteDBCluster(ctx, &rds.DeleteDBClusterInput{
  DBClusterIdentifier: aws.String(clusterName),
  SkipFinalSnapshot:   aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete DB cluster %v: %v\n", clusterName, err)
  return err
 } else {
  return nil
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteDBCluster」を参照してください。

`DeleteDBClusterParameterGroup`

次のコード例は、`DeleteDBClusterParameterGroup` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// DeleteParameterGroup deletes the named DB cluster parameter group.
func (clusters *DbClusters) DeleteParameterGroup(ctx context.Context,
 parameterGroupName string) error {
 _, err := clusters.AuroraClient.DeleteDBClusterParameterGroup(ctx,
  &rds.DeleteDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  log.Printf("Couldn't delete parameter group %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteDBClusterParameterGroup」を参照してください。

DeleteDBInstance

次のコード例は、DeleteDBInstance を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// DeleteInstance deletes a DB instance.
func (clusters *DbClusters) DeleteInstance(ctx context.Context, instanceName string)
 error {
 _, err := clusters.AuroraClient.DeleteDBInstance(ctx, &rds.DeleteDBInstanceInput{
  DBInstanceIdentifier:   aws.String(instanceName),
  SkipFinalSnapshot:      aws.Bool(true),
  DeleteAutomatedBackups: aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete instance %v: %v\n", instanceName, err)
  return err
 } else {
  return nil
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteDBInstance」を参照してください。

`DescribeDBClusterParameterGroups`

次のコード例は、`DescribeDBClusterParameterGroups` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetParameterGroup gets a DB cluster parameter group by name.
func (clusters *DbClusters) GetParameterGroup(ctx context.Context,
 parameterGroupName string) (
 *types.DBClusterParameterGroup, error) {
 output, err := clusters.AuroraClient.DescribeDBClusterParameterGroups(
  ctx, &rds.DescribeDBClusterParameterGroupsInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  var notFoundError *types.DBParameterGroupNotFoundFault
```

```
  if errors.As(err, &notFoundError) {
   log.Printf("Parameter group %v does not exist.\n", parameterGroupName)
   err = nil
  } else {
   log.Printf("Error getting parameter group %v: %v\n", parameterGroupName, err)
  }
  return nil, err
 } else {
  return &output.DBClusterParameterGroups[0], err
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeDBClusterParameterGroups」を参照してください。

`DescribeDBClusterParameters`

次のコード例は、`DescribeDBClusterParameters` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
```

```
 AuroraClient *rds.Client
}



// GetParameters gets the parameters that are contained in a DB cluster parameter
 group.
func (clusters *DbClusters) GetParameters(ctx context.Context, parameterGroupName
 string, source string) (
 []types.Parameter, error) {

 var output *rds.DescribeDBClusterParametersOutput
 var params []types.Parameter
 var err error
 parameterPaginator :=
 rds.NewDescribeDBClusterParametersPaginator(clusters.AuroraClient,
  &rds.DescribeDBClusterParametersInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Source:                      aws.String(source),
  })
 for parameterPaginator.HasMorePages() {
  output, err = parameterPaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get paramaeters for %v: %v\n", parameterGroupName, err)
   break
  } else {
   params = append(params, output.Parameters...)
  }
 }
 return params, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeDBClusterParameters」を参照してください。

`DescribeDBClusterSnapshots`

次のコード例は、`DescribeDBClusterSnapshots` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetClusterSnapshot gets a DB cluster snapshot.
func (clusters *DbClusters) GetClusterSnapshot(ctx context.Context, snapshotName
 string) (*types.DBClusterSnapshot, error) {
 output, err := clusters.AuroraClient.DescribeDBClusterSnapshots(ctx,
  &rds.DescribeDBClusterSnapshotsInput{
   DBClusterSnapshotIdentifier: aws.String(snapshotName),
  })
 if err != nil {
  log.Printf("Couldn't get snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return &output.DBClusterSnapshots[0], nil
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeDBClusterSnapshots」を参照してください。

`DescribeDBClusters`

次のコード例は、`DescribeDBClusters` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetDbCluster gets data about an Aurora DB cluster.
func (clusters *DbClusters) GetDbCluster(ctx context.Context, clusterName string)
 (*types.DBCluster, error) {
 output, err := clusters.AuroraClient.DescribeDBClusters(ctx,
  &rds.DescribeDBClustersInput{
   DBClusterIdentifier: aws.String(clusterName),
  })
 if err != nil {
  var notFoundError *types.DBClusterNotFoundFault
  if errors.As(err, &notFoundError) {
```

```
   log.Printf("DB cluster %v does not exist.\n", clusterName)
   err = nil
  } else {
   log.Printf("Couldn't get DB cluster %v: %v\n", clusterName, err)
  }
  return nil, err
 } else {
  return &output.DBClusters[0], err
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeDBClusters」を参照してください。

`DescribeDBEngineVersions`

次のコード例は、`DescribeDBEngineVersions` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
```

```
}



// GetEngineVersions gets database engine versions that are available for the
 specified engine
// and parameter group family.
func (clusters *DbClusters) GetEngineVersions(ctx context.Context, engine string,
 parameterGroupFamily string) (
 []types.DBEngineVersion, error) {
 output, err := clusters.AuroraClient.DescribeDBEngineVersions(ctx,
  &rds.DescribeDBEngineVersionsInput{
   Engine:                 aws.String(engine),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
  })
 if err != nil {
  log.Printf("Couldn't get engine versions for %v: %v\n", engine, err)
  return nil, err
 } else {
  return output.DBEngineVersions, nil
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeDBEngineVersions」を参照してください。

`DescribeDBInstances`

次のコード例は、`DescribeDBInstances` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetInstance gets data about a DB instance.
func (clusters *DbClusters) GetInstance(ctx context.Context, instanceName string) (
 *types.DBInstance, error) {
 output, err := clusters.AuroraClient.DescribeDBInstances(ctx,
  &rds.DescribeDBInstancesInput{
   DBInstanceIdentifier: aws.String(instanceName),
  })
 if err != nil {
  var notFoundError *types.DBInstanceNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB instance %v does not exist.\n", instanceName)
   err = nil
  } else {
   log.Printf("Couldn't get instance %v: %v\n", instanceName, err)
  }
  return nil, err
 } else {
  return &output.DBInstances[0], nil
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeDBInstances」を参照してください。

DescribeOrderableDBInstanceOptions

次のコード例は、DescribeOrderableDBInstanceOptions を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbClusters struct {
 AuroraClient *rds.Client
}



// GetOrderableInstances uses a paginator to get DB instance options that can be
 used to create DB instances that are
// compatible with a set of specifications.
func (clusters *DbClusters) GetOrderableInstances(ctx context.Context, engine
 string, engineVersion string) (
 []types.OrderableDBInstanceOption, error) {

 var output *rds.DescribeOrderableDBInstanceOptionsOutput
 var instances []types.OrderableDBInstanceOption
 var err error
 orderablePaginator :=
 rds.NewDescribeOrderableDBInstanceOptionsPaginator(clusters.AuroraClient,
  &rds.DescribeOrderableDBInstanceOptionsInput{
   Engine:        aws.String(engine),
```

```
    EngineVersion: aws.String(engineVersion),
   })
  for orderablePaginator.HasMorePages() {
   output, err = orderablePaginator.NextPage(ctx)
   if err != nil {
    log.Printf("Couldn't get orderable DB instances: %v\n", err)
    break
   } else {
    instances = append(instances, output.OrderableDBInstanceOptions...)
   }
  }
  return instances, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeOrderableDBInstanceOptions」を参照してください。

`ModifyDBClusterParameterGroup`

次のコード例は、`ModifyDBClusterParameterGroup` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)
```

```
type DbClusters struct {
 AuroraClient *rds.Client
}



// UpdateParameters updates parameters in a named DB cluster parameter group.
func (clusters *DbClusters) UpdateParameters(ctx context.Context, parameterGroupName
 string, params []types.Parameter) error {
 _, err := clusters.AuroraClient.ModifyDBClusterParameterGroup(ctx,
  &rds.ModifyDBClusterParameterGroupInput{
   DBClusterParameterGroupName: aws.String(parameterGroupName),
   Parameters:                  params,
  })
 if err != nil {
  log.Printf("Couldn't update parameters in %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ModifyDBClusterParameterGroup」を参照してください。

SDK for Go V2 を使用する Amazon Bedrock の例

次のコード例は、Amazon Bedrock で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- はじめに
- アクション

はじめに

Hello Amazon Bedrock

次のコード例は、Amazon Bedrock の使用を開始する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/bedrock"
)

const region = "us-east-1"

// main uses the AWS SDK for Go (v2) to create an Amazon Bedrock client and
// list the available foundation models in your account and the chosen region.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx, config.WithRegion(region))
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
```

```
  return
 }
 bedrockClient := bedrock.NewFromConfig(sdkConfig)
 result, err := bedrockClient.ListFoundationModels(ctx,
 &bedrock.ListFoundationModelsInput{})
 if err != nil {
  fmt.Printf("Couldn't list foundation models. Here's why: %v\n", err)
  return
 }
 if len(result.ModelSummaries) == 0 {
  fmt.Println("There are no foundation models.")
 }
 for _, modelSummary := range result.ModelSummaries {
  fmt.Println(*modelSummary.ModelId)
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ListFoundationModels」を参照してください。

アクション

`ListFoundationModels`

次のコード例は、`ListFoundationModels` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

利用可能な Bedrock 基盤モデルを一覧表示します。

```
import (
 "context"
```

```
 "log"

 "github.com/aws/aws-sdk-go-v2/service/bedrock"
 "github.com/aws/aws-sdk-go-v2/service/bedrock/types"
)

// FoundationModelWrapper encapsulates Amazon Bedrock actions used in the examples.
// It contains a Bedrock service client that is used to perform foundation model
 actions.
type FoundationModelWrapper struct {
 BedrockClient *bedrock.Client
}



// ListPolicies lists Bedrock foundation models that you can use.
func (wrapper FoundationModelWrapper) ListFoundationModels(ctx context.Context)
 ([]types.FoundationModelSummary, error) {

 var models []types.FoundationModelSummary

 result, err := wrapper.BedrockClient.ListFoundationModels(ctx,
 &bedrock.ListFoundationModelsInput{})

 if err != nil {
  log.Printf("Couldn't list foundation models. Here's why: %v\n", err)
 } else {
  models = result.ModelSummaries
 }
 return models, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ListFoundationModels」を参照してください。

SDK for Go V2 を使用した Amazon Bedrock ランタイムの例

次のコード例は、Amazon Bedrock ランタイムで AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- はじめに
- Amazon Nova
- Amazon Titan Image Generator
- Anthropic Claude

はじめに

Hello Amazon Bedrock ランタイム

次のコード例は、Amazon Bedrock ランタイムの使用を開始する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "flag"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime/types"
)

// main uses the AWS SDK for Go (v2) to create an Amazon Bedrock Runtime client
// and invokes Anthropic Claude using the Converse API.
```

```
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {

 region := flag.String("region", "us-east-1", "The AWS region")
 flag.Parse()

 fmt.Printf("Using AWS region: %s\n", *region)

 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx, config.WithRegion(*region))
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }

 client := bedrockruntime.NewFromConfig(sdkConfig)

 // Set the model ID, e.g., Claude Haiku.
 // The "global." prefix enables cross-region inference, allowing the request
 // to be routed to the nearest available region for the specified model.
 modelId := "global.anthropic.claude-haiku-4-5-20251001-v1:0"

 // Start a conversation with the user message.
 prompt := "Hello. In a short paragraph, explain what you can do."

 message := types.Message{
  Content: []types.ContentBlock{
   &types.ContentBlockMemberText{Value: prompt},
  },
  Role: types.ConversationRoleUser,
 }

 fmt.Printf("Model: %s\n", modelId)
 fmt.Printf("Prompt: %s\n\n", prompt)

 result, err := client.Converse(ctx, &bedrockruntime.ConverseInput{
  ModelId:  aws.String(modelId),
  Messages: []types.Message{message},
 })

 if err != nil {
```

```
  log.Fatalf("ERROR: Can't invoke '%s'. Reason: %v\n", modelId, err)
 }

 // Extract and print the response text.
 responseMessage, ok := result.Output.(*types.ConverseOutputMemberMessage)
 if !ok {
  log.Fatal("ERROR: Unexpected output type from Converse API")
 }
 responseContentBlock := responseMessage.Value.Content[0]
 text, ok := responseContentBlock.(*types.ContentBlockMemberText)
 if !ok {
  log.Fatal("ERROR: Unexpected content block type from Converse API")
 }
 fmt.Printf("Response: %s\n", text.Value)
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「Converse」を参照してください。

Amazon Nova

Converse

次のコード例は、Bedrock の Converse API を使用して Amazon Nova にテキストメッセージを送信する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

Bedrock の Converse API を使用して Amazon Nova にテキストメッセージを送信します。

```
func (wrapper ConverseWrapper) ConverseNova(ctx context.Context, prompt string)
 (string, error) {
```

```
 var content = types.ContentBlockMemberText{
  Value: prompt,
 }
 var message = types.Message{
  Content: []types.ContentBlock{&content},
  Role:    "user",
 }
 modelId := "amazon.nova-lite-v1:0"
 var converseInput = bedrockruntime.ConverseInput{
  ModelId:  aws.String(modelId),
  Messages: []types.Message{message},
 }
 response, err := wrapper.BedrockRuntimeClient.Converse(ctx, &converseInput)
 if err != nil {
  ProcessError(err, modelId)
 }

 responseText, _ := response.Output.(*types.ConverseOutputMemberMessage)
 responseContentBlock := responseText.Value.Content[0]
 text, _ := responseContentBlock.(*types.ContentBlockMemberText)
 return text.Value, nil
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「Converse」を参照してください。

Amazon Titan Image Generator

InvokeModel

次のコード例は、Amazon Bedrock で Amazon Titan Image を呼び出して画像を生成する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

Amazon Titan Image Generator を使用して画像を作成します。

```
import (
 "context"
 "encoding/json"
 "log"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime"
)

// InvokeModelWrapper encapsulates Amazon Bedrock actions used in the examples.
// It contains a Bedrock Runtime client that is used to invoke foundation models.
type InvokeModelWrapper struct {
 BedrockRuntimeClient *bedrockruntime.Client
}



type TitanImageRequest struct {
 TaskType              string                `json:"taskType"`
 TextToImageParams     TextToImageParams     `json:"textToImageParams"`
 ImageGenerationConfig ImageGenerationConfig `json:"imageGenerationConfig"`
}
type TextToImageParams struct {
 Text string `json:"text"`
}
type ImageGenerationConfig struct {
 NumberOfImages int     `json:"numberOfImages"`
 Quality        string  `json:"quality"`
 CfgScale       float64 `json:"cfgScale"`
 Height         int     `json:"height"`
 Width          int     `json:"width"`
 Seed           int64   `json:"seed"`
}

type TitanImageResponse struct {
 Images []string `json:"images"`
}

// Invokes the Titan Image model to create an image using the input provided
// in the request body.
```

```
func (wrapper InvokeModelWrapper) InvokeTitanImage(ctx context.Context, prompt
 string, seed int64) (string, error) {
 modelId := "amazon.titan-image-generator-v2:0"

 body, err := json.Marshal(TitanImageRequest{
  TaskType: "TEXT_IMAGE",
  TextToImageParams: TextToImageParams{
   Text: prompt,
  },
  ImageGenerationConfig: ImageGenerationConfig{
   NumberOfImages: 1,
   Quality:        "standard",
   CfgScale:       8.0,
   Height:         512,
   Width:          512,
   Seed:           seed,
  },
 })

 if err != nil {
  log.Fatal("failed to marshal", err)
 }

 output, err := wrapper.BedrockRuntimeClient.InvokeModel(ctx,
 &bedrockruntime.InvokeModelInput{
  ModelId:     aws.String(modelId),
  ContentType: aws.String("application/json"),
  Body:        body,
 })

 if err != nil {
  ProcessError(err, modelId)
 }

 var response TitanImageResponse
 if err := json.Unmarshal(output.Body, &response); err != nil {
  log.Fatal("failed to unmarshal", err)
 }

 base64ImageData := response.Images[0]

 return base64ImageData, nil

}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「InvokeModel」を参照してください。

Anthropic Claude

Converse

次のコード例は、Bedrock の Converse API を使用して Anthropic Claude にテキストメッセージを送信する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

Bedrock の Converse API を使用して、Anthropic Claude にテキストメッセージを送信します。

```
import (
 "context"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime"
 "github.com/aws/aws-sdk-go-v2/service/bedrockruntime/types"
)

// ConverseWrapper encapsulates Amazon Bedrock actions used in the examples.
// It contains a Bedrock Runtime client that is used to invoke Bedrock.
type ConverseWrapper struct {
 BedrockRuntimeClient *bedrockruntime.Client
}



func (wrapper ConverseWrapper) ConverseClaude(ctx context.Context, prompt string)
 (string, error) {
```

```
 var content = types.ContentBlockMemberText{
  Value: prompt,
 }
 var message = types.Message{
  Content: []types.ContentBlock{&content},
  Role:    "user",
 }
 // Claude Haiku 5.5 is available through an inference profile, so this uses
 // the "us." cross-Region profile ID.
 modelId := "us.anthropic.claude-haiku-5-5"
 var converseInput = bedrockruntime.ConverseInput{
  ModelId:  aws.String(modelId),
  Messages: []types.Message{message},
 }
 response, err := wrapper.BedrockRuntimeClient.Converse(ctx, &converseInput)
 if err != nil {
  ProcessError(err, modelId)
 }

 responseText, _ := response.Output.(*types.ConverseOutputMemberMessage)
 responseContentBlock := responseText.Value.Content[0]
 text, _ := responseContentBlock.(*types.ContentBlockMemberText)
 return text.Value, nil

}
```

- API の詳細については、AWS SDK for Go API リファレンスの「Converse」を参照してください。

CloudFormation SDK for Go V2 を使用した の例

次のコード例は、 で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています CloudFormation。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

各例には完全なソースコードへのリンクが含まれており、コードの設定方法と実行方法に関する手順を確認できます。

トピック

- アクション

アクション

`DescribeStacks`

次のコード例は、DescribeStacks を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
```

```
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「DescribeStacks」を参照してください。

SDK for Go V2 を使用した CloudWatch Logs のコード例

次のコード例は、CloudWatch Logs で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

各例には完全なソースコードへのリンクが含まれており、コードの設定方法と実行方法に関する手順を確認できます。

トピック

- アクション

アクション

`StartLiveTail`

次のコード例は、`StartLiveTail` を使用する方法を示しています。

SDK for Go V2

必要なファイルを含めます。

```
import (
 "context"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)
```

Live Tail セッションのイベントを処理します。

```
func handleEventStreamAsync(stream *cloudwatchlogs.StartLiveTailEventStream) {
 eventsChan := stream.Events()
 for {
  event := <-eventsChan
  switch e := event.(type) {
  case *types.StartLiveTailResponseStreamMemberSessionStart:
   log.Println("Received SessionStart event")
  case *types.StartLiveTailResponseStreamMemberSessionUpdate:
   for _, logEvent := range e.Value.SessionResults {
    log.Println(*logEvent.Message)
   }
  default:
   // Handle on-stream exceptions
   if err := stream.Err(); err != nil {
    log.Fatalf("Error occured during streaming: %v", err)
   } else if event == nil {
    log.Println("Stream is Closed")
    return
   } else {
    log.Fatalf("Unknown event type: %T", e)
   }
  }
 }
}
```

Live Tail セッションを開始します。

```
 cfg, err := config.LoadDefaultConfig(context.TODO())
```

```
if err != nil {
 panic("configuration error, " + err.Error())
}
client := cloudwatchlogs.NewFromConfig(cfg)

request := &cloudwatchlogs.StartLiveTailInput{
 LogGroupIdentifiers:   logGroupIdentifiers,
 LogStreamNames:        logStreamNames,
 LogEventFilterPattern: logEventFilterPattern,
}

response, err := client.StartLiveTail(context.TODO(), request)
// Handle pre-stream Exceptions
if err != nil {
 log.Fatalf("Failed to start streaming: %v", err)
}

// Start a Goroutine to handle events over stream
stream := response.GetStream()
go handleEventStreamAsync(stream)
```

一定時間が経過したら Live Tail セッションを停止します。

```
// Close the stream (which ends the session) after a timeout
time.Sleep(10 * time.Second)
stream.Close()
log.Println("Event stream closed")
```

- API の詳細については、AWS SDK for Go API リファレンスの「StartLiveTail」を参照してください。

SDK for Go V2 を使用する Amazon Cognito ID プロバイダーの例

次のコード例は、Amazon Cognito ID プロバイダーで AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

シナリオは、1 つのサービス内から、または他の AWS のサービスと組み合わせて複数の関数を呼び出し、特定のタスクを実行する方法を示すコード例です。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- はじめに
- アクション
- シナリオ

はじめに

Hello Amazon Cognito

次のコード例は、Amazon Cognito の使用を開始する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)
```

```
// main uses the AWS SDK for Go V2 to create an Amazon Simple Notification Service
// (Amazon SNS) client and list the topics in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 cognitoClient := cognitoidentityprovider.NewFromConfig(sdkConfig)
 fmt.Println("Let's list the user pools for your account.")
 var pools []types.UserPoolDescriptionType
 paginator := cognitoidentityprovider.NewListUserPoolsPaginator(
  cognitoClient, &cognitoidentityprovider.ListUserPoolsInput{MaxResults:
 aws.Int32(10)})
 for paginator.HasMorePages() {
  output, err := paginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get user pools. Here's why: %v\n", err)
  } else {
   pools = append(pools, output.UserPools...)
  }
 }
 if len(pools) == 0 {
  fmt.Println("You don't have any user pools!")
 } else {
  for _, pool := range pools {
   fmt.Printf("\t%v: %v\n", *pool.Name, *pool.Id)
  }
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListUserPools」を参照してください。

アクション

AdminCreateUser

次のコード例は、AdminCreateUser を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
```

```
 UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
aws.String(userEmail)}},
})
if err != nil {
 var userExists *types.UsernameExistsException
 if errors.As(err, &userExists) {
  log.Printf("User %v already exists in the user pool.", userName)
  err = nil
 } else {
  log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
 }
}
return err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「AdminCreateUser」を参照してください。

`AdminSetUserPassword`

次のコード例は、`AdminSetUserPassword` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
```

```
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「AdminSetUserPassword」を参照してください。

ConfirmForgotPassword

次のコード例は、ConfirmForgotPassword を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
```

```
  }
 }
 return err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ConfirmForgotPassword」を参照してください。

`DeleteUser`

次のコード例は、DeleteUser を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// DeleteUser removes a user from the user pool.
```

```
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteUser」を参照してください。

`ForgotPassword`

次のコード例は、`ForgotPassword` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
```

```
 CognitoClient *cognitoidentityprovider.Client
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ForgotPassword」を参照してください。

`InitiateAuth`

次のコード例は、`InitiateAuth` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
```

```
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「InitiateAuth」を参照してください。

`ListUserPools`

次のコード例は、`ListUserPools` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Notification Service
// (Amazon SNS) client and list the topics in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 cognitoClient := cognitoidentityprovider.NewFromConfig(sdkConfig)
 fmt.Println("Let's list the user pools for your account.")
 var pools []types.UserPoolDescriptionType
 paginator := cognitoidentityprovider.NewListUserPoolsPaginator(
```

```
 cognitoClient, &cognitoidentityprovider.ListUserPoolsInput{MaxResults:
aws.Int32(10)})
for paginator.HasMorePages() {
 output, err := paginator.NextPage(ctx)
 if err != nil {
  log.Printf("Couldn't get user pools. Here's why: %v\n", err)
 } else {
  pools = append(pools, output.UserPools...)
 }
}
if len(pools) == 0 {
 fmt.Println("You don't have any user pools!")
} else {
 for _, pool := range pools {
  fmt.Printf("\t%v: %v\n", *pool.Name, *pool.Id)
 }
}
}
```

- API の詳細についてはAWS SDK for Go API リファレンスの「ListUserPools」を参照してください。

`SignUp`

次のコード例は、SignUp を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「SignUp」を参照してください。

UpdateUserPool

次のコード例は、UpdateUserPool を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}
```

```
// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「UpdateUserPool」を参照してください。

シナリオ

Lambda 関数を使用して登録済みのユーザーを自動的に確認する

次のコード例は、Lambda 関数を使用して登録済みの Amazon Cognito ユーザーを自動的に確認する方法を示しています。

- `PreSignUp` トリガーの Lambda 関数を呼び出すようにユーザープールを設定します。
- Amazon Cognito でユーザーをサインアップする
- Lambda 関数は DynamoDB テーブルをスキャンし、登録済みのユーザーを自動的に確認します。
- 新しいユーザーとしてサインインし、リソースをクリーンアップします。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

コマンドプロンプトからインタラクティブなシナリオを実行します。

```
import (
 "context"
 "errors"
 "log"
 "strings"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// AutoConfirm separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type AutoConfirm struct {
```

```
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}

// NewAutoConfirm constructs a new auto confirm runner.
func NewAutoConfirm(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) AutoConfirm {
 scenario := AutoConfirm{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddPreSignUpTrigger adds a Lambda handler as an invocation target for the
 PreSignUp trigger.
func (runner *AutoConfirm) AddPreSignUpTrigger(ctx context.Context, userPoolId
 string, functionArn string) {
 log.Printf("Let's add a Lambda function to handle the PreSignUp trigger from
 Cognito.\n" +
  "This trigger happens when a user signs up, and lets your function take action
 before the main Cognito\n" +
  "sign up processing occurs.\n")
 err := runner.cognitoActor.UpdateTriggers(
  ctx, userPoolId,
  actions.TriggerInfo{Trigger: actions.PreSignUp, HandlerArn:
 aws.String(functionArn)})
 if err != nil {
  panic(err)
 }
 log.Printf("Lambda function %v added to user pool %v to handle the PreSignUp
 trigger.\n",
  functionArn, userPoolId)
}

// SignUpUser signs up a user from the known user table with a password you specify.
func (runner *AutoConfirm) SignUpUser(ctx context.Context, clientId string,
 usersTable string) (string, string) {
```

```
 log.Println("Let's sign up a user to your Cognito user pool. When the user's email
 matches an email in the\n" +
  "DynamoDB known users table, it is automatically verified and the user is
 confirmed.")

 knownUsers, err := runner.helper.GetKnownUsers(ctx, usersTable)
 if err != nil {
  panic(err)
 }
 userChoice := runner.questioner.AskChoice("Which user do you want to use?\n",
 knownUsers.UserNameList())
 user := knownUsers.Users[userChoice]

 var signedUp bool
 var userConfirmed bool
 password := runner.questioner.AskPassword("Enter a password that has at least eight
 characters, uppercase, lowercase, numbers and symbols.\n"+
  "(the password will not display as you type):", 8)
 for !signedUp {
  log.Printf("Signing up user '%v' with email '%v' to Cognito.\n", user.UserName,
 user.UserEmail)
  userConfirmed, err = runner.cognitoActor.SignUp(ctx, clientId, user.UserName,
 password, user.UserEmail)
  if err != nil {
   var invalidPassword *types.InvalidPasswordException
   if errors.As(err, &invalidPassword) {
    password = runner.questioner.AskPassword("Enter another password:", 8)
   } else {
    panic(err)
   }
  } else {
   signedUp = true
  }
 }
 log.Printf("User %v signed up, confirmed = %v.\n", user.UserName, userConfirmed)

 log.Println(strings.Repeat("-", 88))

 return user.UserName, password
}

// SignInUser signs in a user.
func (runner *AutoConfirm) SignInUser(ctx context.Context, clientId string, userName
 string, password string) string {
```

```
 runner.questioner.Ask("Press Enter when you're ready to continue.")
 log.Printf("Let's sign in as %v...\n", userName)
 authResult, err := runner.cognitoActor.SignIn(ctx, clientId, userName, password)
 if err != nil {
  panic(err)
 }
 log.Printf("Successfully signed in. Your access token starts with: %v...\n",
 (*authResult.AccessToken)[:10])
 log.Println(strings.Repeat("-", 88))
 return *authResult.AccessToken
}

// Run runs the scenario.
func (runner *AutoConfirm) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")

 log.Println(strings.Repeat("-", 88))

 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]
 runner.helper.PopulateUserTable(ctx, stackOutputs["TableName"])

 runner.AddPreSignUpTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["AutoConfirmFunctionArn"])
 runner.resources.triggers = append(runner.resources.triggers, actions.PreSignUp)
 userName, password := runner.SignUpUser(ctx, stackOutputs["UserPoolClientId"],
 stackOutputs["TableName"])
 runner.helper.ListRecentLogEvents(ctx, stackOutputs["AutoConfirmFunction"])
 runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
  runner.SignInUser(ctx, stackOutputs["UserPoolClientId"], userName, password))

 runner.resources.Cleanup(ctx)
```

```
 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Lambda 関数を使用して PreSignUp トリガーを処理します。

```
import (
 "context"
 "log"
 "os"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 dynamodbtypes "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

const TABLE_NAME = "TABLE_NAME"

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string `dynamodbav:"UserName"`
 UserEmail string `dynamodbav:"UserEmail"`
}

// GetKey marshals the user email value to a DynamoDB key format.
func (user UserInfo) GetKey() map[string]dynamodbtypes.AttributeValue {
 userEmail, err := attributevalue.Marshal(user.UserEmail)
 if err != nil {
  panic(err)
 }
 return map[string]dynamodbtypes.AttributeValue{"UserEmail": userEmail}
}

type handler struct {
```

```
 dynamoClient *dynamodb.Client
}

// HandleRequest handles the PreSignUp event by looking up a user in an Amazon
 DynamoDB table and
// specifying whether they should be confirmed and verified.
func (h *handler) HandleRequest(ctx context.Context, event
 events.CognitoEventUserPoolsPreSignup) (events.CognitoEventUserPoolsPreSignup,
 error) {
 log.Printf("Received presignup from %v for user '%v'", event.TriggerSource,
 event.UserName)
 if event.TriggerSource != "PreSignUp_SignUp" {
  // Other trigger sources, such as PreSignUp_AdminInitiateAuth, ignore the response
 from this handler.
  return event, nil
 }
 tableName := os.Getenv(TABLE_NAME)
 user := UserInfo{
  UserEmail: event.Request.UserAttributes["email"],
 }
 log.Printf("Looking up email %v in table %v.\n", user.UserEmail, tableName)
 output, err := h.dynamoClient.GetItem(ctx, &dynamodb.GetItemInput{
  Key:       user.GetKey(),
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Error looking up email %v.\n", user.UserEmail)
  return event, err
 }
 if output.Item == nil {
  log.Printf("Email %v not found. Email verification is required.\n",
 user.UserEmail)
  return event, err
 }

 err = attributevalue.UnmarshalMap(output.Item, &user)
 if err != nil {
  log.Printf("Couldn't unmarshal DynamoDB item. Here's why: %v\n", err)
  return event, err
 }

 if user.UserName != event.UserName {
  log.Printf("UserEmail %v found, but stored UserName '%v' does not match supplied
 UserName '%v'. Verification is required.\n",
```

```
   user.UserEmail, user.UserName, event.UserName)
 } else {
  log.Printf("UserEmail %v found with matching UserName %v. User is confirmed.\n",
 user.UserEmail, user.UserName)
  event.Response.AutoConfirmUser = true
  event.Response.AutoVerifyEmail = true
 }

 return event, err
}

func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Panicln(err)
 }
 h := handler{
  dynamoClient: dynamodb.NewFromConfig(sdkConfig),
 }
 lambda.Start(h.HandleRequest)
}
```

一般的なタスクを実行する構造体を作成します。

```
import (
 "context"
 "log"
 "strings"
 "time"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// IScenarioHelper defines common functions used by the workflows in this example.
```

```
type IScenarioHelper interface {
 Pause(secs int)
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}

// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
 scenario := ScenarioHelper{
  questioner:  questioner,
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}

// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
```

```
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
 }
 return knownUsers, err
}

// AddKnownUser adds a user to the known users table.
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
```

```
 helper.Pause(10)
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Amazon Cognito アクションをラップする構造体を作成します。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int
```

```
const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
```

```
 }
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
```

```
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
```

```
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}



// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
```

```
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

DynamoDB アクションをラップする構造体を作成します。

```
import (
 "context"
```

```
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
}

// LoginInfo defines structured custom login data.
type LoginInfo struct {
 UserPoolId string
 ClientId   string
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
 }
 return names
}
```

```
// PopulateTable adds a set of test users to the table.
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
}

// Scan scans the table for all items.
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
 }
 return userList, err
}
```

```
// AddUser adds a user item to a table.
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

CloudWatch Logs アクションをラップする構造体を作成します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)

type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
```

```
  Descending:   aws.Bool(true),
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
}
```

CloudFormation アクションをラップする構造体を作成します。

```
import (
 "context"
 "log"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

リソースをクリーンアップします。

```
import (
 "context"
 "log"
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)
```

```
// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}

// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources \n"
 +
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
 if wantDelete {
  for _, accessToken := range resources.userAccessTokens {
   err := resources.cognitoActor.DeleteUser(ctx, accessToken)
   if err != nil {
    log.Println("Couldn't delete user during cleanup.")
    panic(err)
   }
   log.Println("Deleted user.")
  }
  triggerList := make([]actions.TriggerInfo, len(resources.triggers))
```

```
  for i := 0; i < len(resources.triggers); i++ {
   triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
 nil}
  }
  err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
 triggerList...)
  if err != nil {
   log.Println("Couldn't update Cognito triggers during cleanup.")
   panic(err)
  }
  log.Println("Removed Cognito triggers from user pool.")
 } else {
  log.Println("Be sure to remove resources when you're done with them to avoid
 unexpected charges!")
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - DeleteUser
  - InitiateAuth
  - SignUp
  - UpdateUserPool

Lambda 関数を使用して登録済みのユーザーを自動的に移行する

次のコード例は、Lambda 関数を使用して登録済みの Amazon Cognito ユーザーを自動的に移行する方法を示しています。

- `MigrateUser` トリガーの Lambda 関数を呼び出すようにユーザープールを設定します。
- ユーザープールにないユーザー名と E メールで Amazon Cognito にサインインします。
- Lambda 関数は DynamoDB テーブルをスキャンし、登録済みのユーザーをユーザープールに自動的に移行します。
- パスワードを忘れた場合のフローを実行して、移行したユーザーのパスワードをリセットします。
- 新しいユーザーとしてサインインし、リソースをクリーンアップします。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

コマンドプロンプトからインタラクティブなシナリオを実行します。

```
import (
 "context"
 "errors"
 "fmt"
 "log"
 "strings"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// MigrateUser separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type MigrateUser struct {
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}

// NewMigrateUser constructs a new migrate user runner.
func NewMigrateUser(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) MigrateUser {
 scenario := MigrateUser{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
```

```
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddMigrateUserTrigger adds a Lambda handler as an invocation target for the
 MigrateUser trigger.
func (runner *MigrateUser) AddMigrateUserTrigger(ctx context.Context, userPoolId
 string, functionArn string) {
 log.Printf("Let's add a Lambda function to handle the MigrateUser trigger from
 Cognito.\n" +
  "This trigger happens when an unknown user signs in, and lets your function take
 action before Cognito\n" +
  "rejects the user.\n\n")
 err := runner.cognitoActor.UpdateTriggers(
  ctx, userPoolId,
  actions.TriggerInfo{Trigger: actions.UserMigration, HandlerArn:
 aws.String(functionArn)})
 if err != nil {
  panic(err)
 }
 log.Printf("Lambda function %v added to user pool %v to handle the MigrateUser
 trigger.\n",
  functionArn, userPoolId)

 log.Println(strings.Repeat("-", 88))
}

// SignInUser adds a new user to the known users table and signs that user in to
 Amazon Cognito.
func (runner *MigrateUser) SignInUser(ctx context.Context, usersTable string,
 clientId string) (bool, actions.User) {
 log.Println("Let's sign in a user to your Cognito user pool. When the username and
 email matches an entry in the\n" +
  "DynamoDB known users table, the email is automatically verified and the user is
 migrated to the Cognito user pool.")

 user := actions.User{}
 user.UserName = runner.questioner.Ask("\nEnter a username:")
 user.UserEmail = runner.questioner.Ask("\nEnter an email that you own. This email
 will be used to confirm user migration\n" +
  "during this example:")
```

```
 runner.helper.AddKnownUser(ctx, usersTable, user)

 var err error
 var resetRequired *types.PasswordResetRequiredException
 var authResult *types.AuthenticationResultType
 signedIn := false
 for !signedIn && resetRequired == nil {
  log.Printf("Signing in to Cognito as user '%v'. The expected result is a
 PasswordResetRequiredException.\n\n", user.UserName)
  authResult, err = runner.cognitoActor.SignIn(ctx, clientId, user.UserName, "_")
  if err != nil {
   if errors.As(err, &resetRequired) {
    log.Printf("\nUser '%v' is not in the Cognito user pool but was found in the
 DynamoDB known users table.\n"+
     "User migration is started and a password reset is required.", user.UserName)
   } else {
    panic(err)
   }
  } else {
   log.Printf("User '%v' successfully signed in. This is unexpected and probably
 means you have not\n"+
    "cleaned up a previous run of this scenario, so the user exist in the Cognito
 user pool.\n"+
    "You can continue this example and select to clean up resources, or manually
 remove\n"+
    "the user from your user pool and try again.", user.UserName)
   runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
 *authResult.AccessToken)
   signedIn = true
  }
 }

 log.Println(strings.Repeat("-", 88))
 return resetRequired != nil, user
}

// ResetPassword starts a password recovery flow.
func (runner *MigrateUser) ResetPassword(ctx context.Context, clientId string, user
 actions.User) {
 wantCode := runner.questioner.AskBool(fmt.Sprintf("In order to migrate the user to
 Cognito, you must be able to receive a confirmation\n"+
  "code by email at %v. Do you want to send a code (y/n)?", user.UserEmail), "y")
 if !wantCode {
```

```
 log.Println("To complete this example and successfully migrate a user to Cognito,
you must enter an email\n" +
  "you own that can receive a confirmation code.")
 return
}
codeDelivery, err := runner.cognitoActor.ForgotPassword(ctx, clientId,
user.UserName)
if err != nil {
 panic(err)
}
log.Printf("\nA confirmation code has been sent to %v.", *codeDelivery.Destination)
code := runner.questioner.Ask("Check your email and enter it here:")

confirmed := false
password := runner.questioner.AskPassword("\nEnter a password that has at least
eight characters, uppercase, lowercase, numbers and symbols.\n"+
 "(the password will not display as you type):", 8)
for !confirmed {
 log.Printf("\nConfirming password reset for user '%v'.\n", user.UserName)
 err = runner.cognitoActor.ConfirmForgotPassword(ctx, clientId, code,
user.UserName, password)
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   password = runner.questioner.AskPassword("\nEnter another password:", 8)
  } else {
   panic(err)
  }
 } else {
  confirmed = true
 }
}
log.Printf("User '%v' successfully confirmed and migrated.\n", user.UserName)
log.Println("Signing in with your username and password...")
authResult, err := runner.cognitoActor.SignIn(ctx, clientId, user.UserName,
password)
if err != nil {
 panic(err)
}
log.Printf("Successfully signed in. Your access token starts with: %v...\n",
(*authResult.AccessToken)[:10])
runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
*authResult.AccessToken)
```

```
 log.Println(strings.Repeat("-", 88))
}

// Run runs the scenario.
func (runner *MigrateUser) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")

 log.Println(strings.Repeat("-", 88))

 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]

 runner.AddMigrateUserTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["MigrateUserFunctionArn"])
 runner.resources.triggers = append(runner.resources.triggers,
 actions.UserMigration)
 resetNeeded, user := runner.SignInUser(ctx, stackOutputs["TableName"],
 stackOutputs["UserPoolClientId"])
 if resetNeeded {
  runner.helper.ListRecentLogEvents(ctx, stackOutputs["MigrateUserFunction"])
  runner.ResetPassword(ctx, stackOutputs["UserPoolClientId"], user)
 }

 runner.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Lambda 関数を使用して MigrateUser トリガーを処理します。

```
import (
 "context"
 "log"
 "os"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
)

const TABLE_NAME = "TABLE_NAME"

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string `dynamodbav:"UserName"`
 UserEmail string `dynamodbav:"UserEmail"`
}

type handler struct {
 dynamoClient *dynamodb.Client
}

// HandleRequest handles the MigrateUser event by looking up a user in an Amazon
 DynamoDB table and
// specifying whether they should be migrated to the user pool.
func (h *handler) HandleRequest(ctx context.Context, event
 events.CognitoEventUserPoolsMigrateUser) (events.CognitoEventUserPoolsMigrateUser,
 error) {
 log.Printf("Received migrate trigger from %v for user '%v'", event.TriggerSource,
 event.UserName)
 if event.TriggerSource != "UserMigration_Authentication" {
  return event, nil
 }
 tableName := os.Getenv(TABLE_NAME)
 user := UserInfo{
  UserName: event.UserName,
```

```
 }
 log.Printf("Looking up user '%v' in table %v.\n", user.UserName, tableName)
 filterEx := expression.Name("UserName").Equal(expression.Value(user.UserName))
 expr, err := expression.NewBuilder().WithFilter(filterEx).Build()
 if err != nil {
  log.Printf("Error building expression to query for user '%v'.\n", user.UserName)
  return event, err
 }
 output, err := h.dynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName:                 aws.String(tableName),
  FilterExpression:          expr.Filter(),
  ExpressionAttributeNames:  expr.Names(),
  ExpressionAttributeValues: expr.Values(),
 })
 if err != nil {
  log.Printf("Error looking up user '%v'.\n", user.UserName)
  return event, err
 }
 if len(output.Items) == 0 {
  log.Printf("User '%v' not found, not migrating user.\n", user.UserName)
  return event, err
 }

 var users []UserInfo
 err = attributevalue.UnmarshalListOfMaps(output.Items, &users)
 if err != nil {
  log.Printf("Couldn't unmarshal DynamoDB items. Here's why: %v\n", err)
  return event, err
 }

 user = users[0]
 log.Printf("UserName '%v' found with email %v. User is migrated and must reset
 password.\n", user.UserName, user.UserEmail)
 event.CognitoEventUserPoolsMigrateUserResponse.UserAttributes = map[string]string{
  "email":          user.UserEmail,
  "email_verified": "true", // email_verified is required for the forgot password
 flow.
 }
 event.CognitoEventUserPoolsMigrateUserResponse.FinalUserStatus = "RESET_REQUIRED"
 event.CognitoEventUserPoolsMigrateUserResponse.MessageAction = "SUPPRESS"

 return event, err
}
```

```
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Panicln(err)
 }
 h := handler{
  dynamoClient: dynamodb.NewFromConfig(sdkConfig),
 }
 lambda.Start(h.HandleRequest)
}
```

一般的なタスクを実行する構造体を作成します。

```
import (
 "context"
 "log"
 "strings"
 "time"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// IScenarioHelper defines common functions used by the workflows in this example.
type IScenarioHelper interface {
 Pause(secs int)
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}
```

```
// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
 scenario := ScenarioHelper{
  questioner:  questioner,
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}

// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
```

```
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
 }
 return knownUsers, err
}

// AddKnownUser adds a user to the known users table.
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
 helper.Pause(10)
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
```

```
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Amazon Cognito アクションをラップする構造体を作成します。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
```

```
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
```

```
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
```

```
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
```

```
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}



// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
```

```
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

DynamoDB アクションをラップする構造体を作成します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)
```

```
// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
}

// LoginInfo defines structured custom login data.
type LoginInfo struct {
 UserPoolId string
 ClientId   string
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
 }
 return names
}

// PopulateTable adds a set of test users to the table.
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
```

```
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
}

// Scan scans the table for all items.
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
 }
 return userList, err
}

// AddUser adds a user item to a table.
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
```

```
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

CloudWatch Logs アクションをラップする構造体を作成します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)

type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
  Descending:   aws.Bool(true),
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
```

```
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
}
```

CloudFormation アクションをラップする構造体を作成します。

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
```

```
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

リソースをクリーンアップします。

```
import (
 "context"
 "log"
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
```

```
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}

// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources \n"
 +
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
 if wantDelete {
  for _, accessToken := range resources.userAccessTokens {
   err := resources.cognitoActor.DeleteUser(ctx, accessToken)
   if err != nil {
    log.Println("Couldn't delete user during cleanup.")
    panic(err)
   }
   log.Println("Deleted user.")
  }
  triggerList := make([]actions.TriggerInfo, len(resources.triggers))
  for i := 0; i < len(resources.triggers); i++ {
   triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
 nil}
  }
  err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
 triggerList...)
  if err != nil {
   log.Println("Couldn't update Cognito triggers during cleanup.")
   panic(err)
```

```
  }
  log.Println("Removed Cognito triggers from user pool.")
 } else {
  log.Println("Be sure to remove resources when you're done with them to avoid
 unexpected charges!")
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - ConfirmForgotPassword
  - DeleteUser
  - ForgotPassword
  - InitiateAuth
  - SignUp
  - UpdateUserPool

Amazon Cognito ユーザー認証後に Lambda 関数を使用してカスタムアクティビティデータを書き込む

次のコード例は、Amazon Cognito ユーザー認証後に Lambda 関数を使用してカスタムアクティビティデータを書き込む方法を示しています。

- 管理者関数を使用して、ユーザーをユーザープールに追加します。
- `PostAuthentication` トリガーの Lambda 関数を呼び出すようにユーザープールを設定します。
- 新しいユーザーを Amazon Cognito にサインインします。
- Lambda 関数は、カスタム情報を CloudWatch Logs と DynamoDB テーブルに書き込みます。
- DynamoDB テーブルからカスタムデータを取得して表示し、リソースをクリーンアップします。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

コマンドプロンプトからインタラクティブなシナリオを実行します。

```
import (
 "context"
 "errors"
 "log"
 "strings"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// ActivityLog separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type ActivityLog struct {
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}

// NewActivityLog constructs a new activity log runner.
func NewActivityLog(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) ActivityLog {
 scenario := ActivityLog{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
```

```
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddUserToPool selects a user from the known users table and uses administrator
 credentials to add the user to the user pool.
func (runner *ActivityLog) AddUserToPool(ctx context.Context, userPoolId string,
 tableName string) (string, string) {
 log.Println("To facilitate this example, let's add a user to the user pool using
 administrator privileges.")
 users, err := runner.helper.GetKnownUsers(ctx, tableName)
 if err != nil {
  panic(err)
 }
 user := users.Users[0]
 log.Printf("Adding known user %v to the user pool.\n", user.UserName)
 err = runner.cognitoActor.AdminCreateUser(ctx, userPoolId, user.UserName,
 user.UserEmail)
 if err != nil {
  panic(err)
 }
 pwSet := false
 password := runner.questioner.AskPassword("\nEnter a password that has at least
 eight characters, uppercase, lowercase, numbers and symbols.\n"+
  "(the password will not display as you type):", 8)
 for !pwSet {
  log.Printf("\nSetting password for user '%v'.\n", user.UserName)
  err = runner.cognitoActor.AdminSetUserPassword(ctx, userPoolId, user.UserName,
 password)
  if err != nil {
   var invalidPassword *types.InvalidPasswordException
   if errors.As(err, &invalidPassword) {
    password = runner.questioner.AskPassword("\nEnter another password:", 8)
   } else {
    panic(err)
   }
  } else {
   pwSet = true
  }
 }

 log.Println(strings.Repeat("-", 88))
```

```
 return user.UserName, password
}

// AddActivityLogTrigger adds a Lambda handler as an invocation target for the
 PostAuthentication trigger.
func (runner *ActivityLog) AddActivityLogTrigger(ctx context.Context, userPoolId
 string, activityLogArn string) {
 log.Println("Let's add a Lambda function to handle the PostAuthentication trigger
 from Cognito.\n" +
  "This trigger happens after a user is authenticated, and lets your function take
 action, such as logging\n" +
  "the outcome.")
 err := runner.cognitoActor.UpdateTriggers(
  ctx, userPoolId,
  actions.TriggerInfo{Trigger: actions.PostAuthentication, HandlerArn:
 aws.String(activityLogArn)})
 if err != nil {
  panic(err)
 }
 runner.resources.triggers = append(runner.resources.triggers,
 actions.PostAuthentication)
 log.Printf("Lambda function %v added to user pool %v to handle PostAuthentication
 Cognito trigger.\n",
  activityLogArn, userPoolId)

 log.Println(strings.Repeat("-", 88))
}

// SignInUser signs in as the specified user.
func (runner *ActivityLog) SignInUser(ctx context.Context, clientId string, userName
 string, password string) {
 log.Printf("Now we'll sign in user %v and check the results in the logs and the
 DynamoDB table.", userName)
 runner.questioner.Ask("Press Enter when you're ready.")
 authResult, err := runner.cognitoActor.SignIn(ctx, clientId, userName, password)
 if err != nil {
  panic(err)
 }
 log.Println("Sign in successful.",
  "The PostAuthentication Lambda handler writes custom information to CloudWatch
 Logs.")

 runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
 *authResult.AccessToken)
```

```
}

// GetKnownUserLastLogin gets the login info for a user from the Amazon DynamoDB
 table and displays it.
func (runner *ActivityLog) GetKnownUserLastLogin(ctx context.Context, tableName
 string, userName string) {
 log.Println("The PostAuthentication handler also writes login data to the DynamoDB
 table.")
 runner.questioner.Ask("Press Enter when you're ready to continue.")
 users, err := runner.helper.GetKnownUsers(ctx, tableName)
 if err != nil {
  panic(err)
 }
 for _, user := range users.Users {
  if user.UserName == userName {
   log.Println("The last login info for the user in the known users table is:")
   log.Printf("\t%+v", *user.LastLogin)
  }
 }
 log.Println(strings.Repeat("-", 88))
}

// Run runs the scenario.
func (runner *ActivityLog) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")

 log.Println(strings.Repeat("-", 88))

 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]
 runner.helper.PopulateUserTable(ctx, stackOutputs["TableName"])
 userName, password := runner.AddUserToPool(ctx, stackOutputs["UserPoolId"],
 stackOutputs["TableName"])
```

```
 runner.AddActivityLogTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["ActivityLogFunctionArn"])
 runner.SignInUser(ctx, stackOutputs["UserPoolClientId"], userName, password)
 runner.helper.ListRecentLogEvents(ctx, stackOutputs["ActivityLogFunction"])
 runner.GetKnownUserLastLogin(ctx, stackOutputs["TableName"], userName)

 runner.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Lambda 関数を使用して PostAuthentication トリガーを処理します。

```
import (
 "context"
 "fmt"
 "log"
 "os"
 "time"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 dynamodbtypes "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

const TABLE_NAME = "TABLE_NAME"

// LoginInfo defines structured login data that can be marshalled to a DynamoDB
 format.
type LoginInfo struct {
 UserPoolId string `dynamodbav:"UserPoolId"`
 ClientId   string `dynamodbav:"ClientId"`
 Time       string `dynamodbav:"Time"`
```

```
}

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string    `dynamodbav:"UserName"`
 UserEmail string    `dynamodbav:"UserEmail"`
 LastLogin LoginInfo `dynamodbav:"LastLogin"`
}

// GetKey marshals the user email value to a DynamoDB key format.
func (user UserInfo) GetKey() map[string]dynamodbtypes.AttributeValue {
 userEmail, err := attributevalue.Marshal(user.UserEmail)
 if err != nil {
  panic(err)
 }
 return map[string]dynamodbtypes.AttributeValue{"UserEmail": userEmail}
}

type handler struct {
 dynamoClient *dynamodb.Client
}

// HandleRequest handles the PostAuthentication event by writing custom data to the
 logs and
// to an Amazon DynamoDB table.
func (h *handler) HandleRequest(ctx context.Context,
 event events.CognitoEventUserPoolsPostAuthentication)
 (events.CognitoEventUserPoolsPostAuthentication, error) {
 log.Printf("Received post authentication trigger from %v for user '%v'",
 event.TriggerSource, event.UserName)
 tableName := os.Getenv(TABLE_NAME)
 user := UserInfo{
  UserName:  event.UserName,
  UserEmail: event.Request.UserAttributes["email"],
  LastLogin: LoginInfo{
   UserPoolId: event.UserPoolID,
   ClientId:   event.CallerContext.ClientID,
   Time:       time.Now().Format(time.UnixDate),
  },
 }
 // Write to CloudWatch Logs.
 fmt.Printf("%#v", user)
```

```
 // Also write to an external system. This examples uses DynamoDB to demonstrate.
 userMap, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshal to DynamoDB map. Here's why: %v\n", err)
 } else if len(userMap) == 0 {
  log.Printf("User info marshaled to an empty map.")
 } else {
  _, err := h.dynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
   Item:      userMap,
   TableName: aws.String(tableName),
  })
  if err != nil {
   log.Printf("Couldn't write to DynamoDB. Here's why: %v\n", err)
  } else {
   log.Printf("Wrote user info to DynamoDB table %v.\n", tableName)
  }
 }

 return event, nil
}

func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Panicln(err)
 }
 h := handler{
  dynamoClient: dynamodb.NewFromConfig(sdkConfig),
 }
 lambda.Start(h.HandleRequest)
}
```

一般的なタスクを実行する構造体を作成します。

```
import (
 "context"
 "log"
 "strings"
 "time"
```

```
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// IScenarioHelper defines common functions used by the workflows in this example.
type IScenarioHelper interface {
 Pause(secs int)
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}

// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
 scenario := ScenarioHelper{
  questioner:  questioner,
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}
```

```
// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}

// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
 }
 return knownUsers, err
}

// AddKnownUser adds a user to the known users table.
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
```

```
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
 helper.Pause(10)
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Amazon Cognito アクションをラップする構造体を作成します。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
```

```
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
```

```
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}
```

```
// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}
```

```
// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}



// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
```

```
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
```

```
 return err
}
```

DynamoDB アクションをラップする構造体を作成します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
}

// LoginInfo defines structured custom login data.
type LoginInfo struct {
 UserPoolId string
 ClientId   string
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
```

```
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
 }
 return names
}

// PopulateTable adds a set of test users to the table.
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
}

// Scan scans the table for all items.
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
```

```
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
 }
 return userList, err
}

// AddUser adds a user item to a table.
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

CloudWatch Logs アクションをラップする構造体を作成します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)
```

```
type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
  Descending:   aws.Bool(true),
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
```

```
}
```

CloudFormation アクションをラップする構造体を作成します。

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

リソースをクリーンアップします。

```
import (
 "context"
 "log"
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}

// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources \n"
 +
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
```

```
 if wantDelete {
  for _, accessToken := range resources.userAccessTokens {
   err := resources.cognitoActor.DeleteUser(ctx, accessToken)
   if err != nil {
    log.Println("Couldn't delete user during cleanup.")
    panic(err)
   }
   log.Println("Deleted user.")
  }
  triggerList := make([]actions.TriggerInfo, len(resources.triggers))
  for i := 0; i < len(resources.triggers); i++ {
   triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
 nil}
  }
  err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
 triggerList...)
  if err != nil {
   log.Println("Couldn't update Cognito triggers during cleanup.")
   panic(err)
  }
  log.Println("Removed Cognito triggers from user pool.")
 } else {
  log.Println("Be sure to remove resources when you're done with them to avoid
 unexpected charges!")
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - AdminCreateUser
  - AdminSetUserPassword
  - DeleteUser
  - InitiateAuth
  - UpdateUserPool

SDK for Go V2 を使用した Amazon DocumentDB の例

次のコード例は、Amazon DocumentDB で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- サーバーレスサンプル

サーバーレスサンプル

Amazon DocumentDB トリガーから Lambda 関数を呼び出す

次のコードの例は、DocumentDB 変更ストリームからレコードを受信することによってトリガーされるイベントを受け取る、Lambda 関数の実装方法を示しています。関数は DocumentDB ペイロードを取得し、レコードの内容を口グ記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用して Lambda で Amazon DocumentDB イベントの消費。

```
package main

import (
 "context"
 "encoding/json"
 "fmt"

 "github.com/aws/aws-lambda-go/lambda"
)
```

```
type Event struct {
 Events []Record `json:"events"`
}

type Record struct {
 Event struct {
  OperationType string `json:"operationType"`
  NS            struct {
   DB   string `json:"db"`
   Coll string `json:"coll"`
  } `json:"ns"`
  FullDocument interface{} `json:"fullDocument"`
 } `json:"event"`
}

func main() {
 lambda.Start(handler)
}

func handler(ctx context.Context, event Event) (string, error) {
 fmt.Println("Loading function")
 for _, record := range event.Events {
  logDocumentDBEvent(record)
 }

 return "OK", nil
}

func logDocumentDBEvent(record Record) {
 fmt.Printf("Operation type: %s\n", record.Event.OperationType)
 fmt.Printf("db: %s\n", record.Event.NS.DB)
 fmt.Printf("collection: %s\n", record.Event.NS.Coll)
 docBytes, _ := json.MarshalIndent(record.Event.FullDocument, "", "  ")
 fmt.Printf("Full document: %s\n", string(docBytes))
}
```

SDK for Go V2 を使用した DynamoDB の例

次のコード例は、DynamoDB で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

基本 は、重要なオペレーションをサービス内で実行する方法を示すコード例です。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

シナリオは、1 つのサービス内から、または他の AWS のサービスと組み合わせて複数の関数を呼び出し、特定のタスクを実行する方法を示すコード例です。

AWS コミュニティへの貢献は、複数のチームによって作成され、維持されている例です AWS。フィードバックを提供するには、リンクされたリポジトリで提供されているメカニズムを使用します。

各例には、完全なソースコードへのリンクが含まれており、そこからコードの設定方法と実行方法に関する手順を確認できます。

トピック

- 基本
- アクション
- シナリオ
- サーバーレスサンプル
- AWS コミュニティへの貢献

基本

基本を学ぶ

次のコード例は、以下の操作方法を示しています。

- 映画データを保持できるテーブルを作成します。
- テーブルに 1 つの映画を入れ、取得して更新する。
- サンプル JSON ファイルから映画データをテーブルに書き込む。
- 特定の年にリリースされた映画を照会する。
- 一定期間内に公開された映画をスキャンします。
- テーブルから映画を削除し、テーブルを削除します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

対話型シナリオを実行してテーブルを作成し、そのテーブルに対してアクションを実行します。

```
import (
 "context"
 "fmt"
 "log"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/dynamodb/actions"
)

// RunMovieScenario is an interactive example that shows you how to use the AWS SDK
 for Go
// to create and use an Amazon DynamoDB table that stores data about movies.
//
//  1. Create a table that can hold movie data.
//  2. Put, get, and update a single movie in the table.
//  3. Write movie data to the table from a sample JSON file.
//  4. Query for movies that were released in a given year.
//  5. Scan for movies that were released in a range of years.
//  6. Delete a movie from the table.
//  7. Delete the table.
//
// This example creates a DynamoDB service client from the specified sdkConfig so
 that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
//
```

```
// The specified movie sampler is used to get sample data from a URL that is loaded
// into the named table.
func RunMovieScenario(
 ctx context.Context, sdkConfig aws.Config, questioner demotools.IQuestioner,
 tableName string,
 movieSampler actions.IMovieSampler) {
 defer func() {
  if r := recover(); r != nil {
   fmt.Printf("Something went wrong with the demo.")
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon DynamoDB getting started demo.")
 log.Println(strings.Repeat("-", 88))

 tableBasics := actions.TableBasics{TableName: tableName,
  DynamoDbClient: dynamodb.NewFromConfig(sdkConfig)}

 exists, err := tableBasics.TableExists(ctx)
 if err != nil {
  panic(err)
 }
 if !exists {
  log.Printf("Creating table %v...\n", tableName)
  _, err = tableBasics.CreateMovieTable(ctx)
  if err != nil {
   panic(err)
  } else {
   log.Printf("Created table %v.\n", tableName)
  }
 } else {
  log.Printf("Table %v already exists.\n", tableName)
 }

 var customMovie actions.Movie
 customMovie.Title = questioner.Ask("Enter a movie title to add to the table:",
  demotools.NotEmpty{})
 customMovie.Year = questioner.AskInt("What year was it released?",
  demotools.NotEmpty{}, demotools.InIntRange{Lower: 1900, Upper: 2030})
 customMovie.Info = map[string]interface{}{}
 customMovie.Info["rating"] = questioner.AskFloat64(
  "Enter a rating between 1 and 10:",
  demotools.NotEmpty{}, demotools.InFloatRange{Lower: 1, Upper: 10})
```

```
customMovie.Info["plot"] = questioner.Ask("What's the plot? ",
 demotools.NotEmpty{})
err = tableBasics.AddMovie(ctx, customMovie)
if err == nil {
 log.Printf("Added %v to the movie table.\n", customMovie.Title)
}
log.Println(strings.Repeat("-", 88))

log.Printf("Let's update your movie. You previously rated it %v.\n",
customMovie.Info["rating"])
customMovie.Info["rating"] = questioner.AskFloat64(
 "What new rating would you give it?",
 demotools.NotEmpty{}, demotools.InFloatRange{Lower: 1, Upper: 10})
log.Printf("You summarized the plot as '%v'.\n", customMovie.Info["plot"])
customMovie.Info["plot"] = questioner.Ask("What would you say now?",
 demotools.NotEmpty{})
attributes, err := tableBasics.UpdateMovie(ctx, customMovie)
if err == nil {
 log.Printf("Updated %v with new values.\n", customMovie.Title)
 for _, attVal := range attributes {
  for valKey, val := range attVal {
   log.Printf("\t%v: %v\n", valKey, val)
  }
 }
}
log.Println(strings.Repeat("-", 88))

log.Printf("Getting movie data from %v and adding 250 movies to the table...\n",
 movieSampler.GetURL())
movies := movieSampler.GetSampleMovies()
written, err := tableBasics.AddMovieBatch(ctx, movies, 250)
if err != nil {
 panic(err)
} else {
 log.Printf("Added %v movies to the table.\n", written)
}

show := 10
if show > written {
 show = written
}
log.Printf("The first %v movies in the table are:", show)
for index, movie := range movies[:show] {
 log.Printf("\t%v. %v\n", index+1, movie.Title)
```

```
}
movieIndex := questioner.AskInt(
 "Enter the number of a movie to get info about it: ",
 demotools.InIntRange{Lower: 1, Upper: show},
)
movie, err := tableBasics.GetMovie(ctx, movies[movieIndex-1].Title,
movies[movieIndex-1].Year)
if err == nil {
 log.Println(movie)
}
log.Println(strings.Repeat("-", 88))

log.Println("Let's get a list of movies released in a given year.")
releaseYear := questioner.AskInt("Enter a year between 1972 and 2018: ",
 demotools.InIntRange{Lower: 1972, Upper: 2018},
)
releases, err := tableBasics.Query(ctx, releaseYear)
if err == nil {
 if len(releases) == 0 {
  log.Printf("I couldn't find any movies released in %v!\n", releaseYear)
 } else {
  for _, movie = range releases {
   log.Println(movie)
  }
 }
}
log.Println(strings.Repeat("-", 88))

log.Println("Now let's scan for movies released in a range of years.")
startYear := questioner.AskInt("Enter a year: ",
 demotools.InIntRange{Lower: 1972, Upper: 2018})
endYear := questioner.AskInt("Enter another year: ",
 demotools.InIntRange{Lower: 1972, Upper: 2018})
releases, err = tableBasics.Scan(ctx, startYear, endYear)
if err == nil {
 if len(releases) == 0 {
  log.Printf("I couldn't find any movies released between %v and %v!\n", startYear,
endYear)
 } else {
  log.Printf("Found %v movies. In this list, the plot is <nil> because "+
   "we used a projection expression when scanning for items to return only "+
   "the title, year, and rating.\n", len(releases))
  for _, movie = range releases {
   log.Println(movie)
```

```
   }
  }
 }
 log.Println(strings.Repeat("-", 88))

 var tables []string
 if questioner.AskBool("Do you want to list all of your tables? (y/n) ", "y") {
  tables, err = tableBasics.ListTables(ctx)
  if err == nil {
   log.Printf("Found %v tables:", len(tables))
   for _, table := range tables {
    log.Printf("\t%v", table)
   }
  }
 }
 log.Println(strings.Repeat("-", 88))

 log.Printf("Let's remove your movie '%v'.\n", customMovie.Title)
 if questioner.AskBool("Do you want to delete it from the table? (y/n) ", "y") {
  err = tableBasics.DeleteMovie(ctx, customMovie)
 }
 if err == nil {
  log.Printf("Deleted %v.\n", customMovie.Title)
 }

 if questioner.AskBool("Delete the table, too? (y/n)", "y") {
  err = tableBasics.DeleteTable(ctx)
 } else {
  log.Println("Don't forget to delete the table when you're done or you might " +
   "incur charges on your account.")
 }
 if err == nil {
  log.Printf("Deleted table %v.\n", tableBasics.TableName)
 }

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
```

```
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

DynamoDB アクションを呼び出す構造体およびメソッドを作成します。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// TableExists determines whether a DynamoDB table exists.
func (basics TableBasics) TableExists(ctx context.Context) (bool, error) {
 exists := true
 _, err := basics.DynamoDbClient.DescribeTable(
  ctx, &dynamodb.DescribeTableInput{TableName: aws.String(basics.TableName)},
 )
 if err != nil {
  var notFoundEx *types.ResourceNotFoundException
  if errors.As(err, &notFoundEx) {
   log.Printf("Table %v does not exist.\n", basics.TableName)
   err = nil
  } else {
```

```
   log.Printf("Couldn't determine existence of table %v. Here's why: %v\n",
 basics.TableName, err)
  }
  exists = false
 }
 return exists, err
}



// CreateMovieTable creates a DynamoDB table with a composite primary key defined as
// a string sort key named `title`, and a numeric partition key named `year`.
// This function uses NewTableExistsWaiter to wait for the table to be created by
// DynamoDB before it returns.
func (basics TableBasics) CreateMovieTable(ctx context.Context)
 (*types.TableDescription, error) {
 var tableDesc *types.TableDescription
 table, err := basics.DynamoDbClient.CreateTable(ctx, &dynamodb.CreateTableInput{
  AttributeDefinitions: []types.AttributeDefinition{{
   AttributeName: aws.String("year"),
   AttributeType: types.ScalarAttributeTypeN,
  }, {
   AttributeName: aws.String("title"),
   AttributeType: types.ScalarAttributeTypeS,
  }},
  KeySchema: []types.KeySchemaElement{{
   AttributeName: aws.String("year"),
   KeyType:       types.KeyTypeHash,
  }, {
   AttributeName: aws.String("title"),
   KeyType:       types.KeyTypeRange,
  }},
  TableName:   aws.String(basics.TableName),
  BillingMode: types.BillingModePayPerRequest,
 })
 if err != nil {
  log.Printf("Couldn't create table %v. Here's why: %v\n", basics.TableName, err)
 } else {
  waiter := dynamodb.NewTableExistsWaiter(basics.DynamoDbClient)
  err = waiter.Wait(ctx, &dynamodb.DescribeTableInput{
   TableName: aws.String(basics.TableName)}, 5*time.Minute)
  if err != nil {
   log.Printf("Wait for table exists failed. Here's why: %v\n", err)
  }
```

```
  tableDesc = table.TableDescription
  log.Printf("Ccreating table test")
 }
 return tableDesc, err
}



// ListTables lists the DynamoDB table names for the current account.
func (basics TableBasics) ListTables(ctx context.Context) ([]string, error) {
 var tableNames []string
 var output *dynamodb.ListTablesOutput
 var err error
 tablePaginator := dynamodb.NewListTablesPaginator(basics.DynamoDbClient,
 &dynamodb.ListTablesInput{})
 for tablePaginator.HasMorePages() {
  output, err = tablePaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't list tables. Here's why: %v\n", err)
   break
  } else {
   tableNames = append(tableNames, output.TableNames...)
  }
 }
 return tableNames, err
}



// AddMovie adds a movie the DynamoDB table.
func (basics TableBasics) AddMovie(ctx context.Context, movie Movie) error {
 item, err := attributevalue.MarshalMap(movie)
 if err != nil {
  panic(err)
 }
 _, err = basics.DynamoDbClient.PutItem(ctx, &dynamodb.PutItemInput{
  TableName: aws.String(basics.TableName), Item: item,
 })
 if err != nil {
  log.Printf("Couldn't add item to table. Here's why: %v\n", err)
 }
 return err
}
```

```
// UpdateMovie updates the rating and plot of a movie that already exists in the
// DynamoDB table. This function uses the `expression` package to build the update
// expression.
func (basics TableBasics) UpdateMovie(ctx context.Context, movie Movie)
 (map[string]map[string]interface{}, error) {
 var err error
 var response *dynamodb.UpdateItemOutput
 var attributeMap map[string]map[string]interface{}
 update := expression.Set(expression.Name("info.rating"),
 expression.Value(movie.Info["rating"]))
 update.Set(expression.Name("info.plot"), expression.Value(movie.Info["plot"]))
 expr, err := expression.NewBuilder().WithUpdate(update).Build()
 if err != nil {
  log.Printf("Couldn't build expression for update. Here's why: %v\n", err)
 } else {
  response, err = basics.DynamoDbClient.UpdateItem(ctx, &dynamodb.UpdateItemInput{
   TableName:                 aws.String(basics.TableName),
   Key:                       movie.GetKey(),
   ExpressionAttributeNames:  expr.Names(),
   ExpressionAttributeValues: expr.Values(),
   UpdateExpression:          expr.Update(),
   ReturnValues:              types.ReturnValueUpdatedNew,
  })
  if err != nil {
   log.Printf("Couldn't update movie %v. Here's why: %v\n", movie.Title, err)
  } else {
   err = attributevalue.UnmarshalMap(response.Attributes, &attributeMap)
   if err != nil {
    log.Printf("Couldn't unmarshall update response. Here's why: %v\n", err)
   }
  }
 }
 return attributeMap, err
}



// AddMovieBatch adds a slice of movies to the DynamoDB table. The function sends
// batches of 25 movies to DynamoDB until all movies are added or it reaches the
// specified maximum.
func (basics TableBasics) AddMovieBatch(ctx context.Context, movies []Movie,
 maxMovies int) (int, error) {
```

```
 var err error
 var item map[string]types.AttributeValue
 written := 0
 batchSize := 25 // DynamoDB allows a maximum batch size of 25 items.
 start := 0
 end := start + batchSize
 for start < maxMovies && start < len(movies) {
  var writeReqs []types.WriteRequest
  if end > len(movies) {
   end = len(movies)
  }
  for _, movie := range movies[start:end] {
   item, err = attributevalue.MarshalMap(movie)
   if err != nil {
    log.Printf("Couldn't marshal movie %v for batch writing. Here's why: %v\n",
 movie.Title, err)
   } else {
    writeReqs = append(
     writeReqs,
     types.WriteRequest{PutRequest: &types.PutRequest{Item: item}},
    )
   }
  }
  _, err = basics.DynamoDbClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
   RequestItems: map[string][]types.WriteRequest{basics.TableName: writeReqs}})
  if err != nil {
   log.Printf("Couldn't add a batch of movies to %v. Here's why: %v\n",
 basics.TableName, err)
  } else {
   written += len(writeReqs)
  }
  start = end
  end += batchSize
 }

 return written, err
}



// GetMovie gets movie data from the DynamoDB table by using the primary composite
 key
// made of title and year.
```

```
func (basics TableBasics) GetMovie(ctx context.Context, title string, year int)
 (Movie, error) {
 movie := Movie{Title: title, Year: year}
 response, err := basics.DynamoDbClient.GetItem(ctx, &dynamodb.GetItemInput{
  Key: movie.GetKey(), TableName: aws.String(basics.TableName),
 })
 if err != nil {
  log.Printf("Couldn't get info about %v. Here's why: %v\n", title, err)
 } else {
  err = attributevalue.UnmarshalMap(response.Item, &movie)
  if err != nil {
   log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
  }
 }
 return movie, err
}



// Query gets all movies in the DynamoDB table that were released in the specified
 year.
// The function uses the `expression` package to build the key condition expression
// that is used in the query.
func (basics TableBasics) Query(ctx context.Context, releaseYear int) ([]Movie,
 error) {
 var err error
 var response *dynamodb.QueryOutput
 var movies []Movie
 keyEx := expression.Key("year").Equal(expression.Value(releaseYear))
 expr, err := expression.NewBuilder().WithKeyCondition(keyEx).Build()
 if err != nil {
  log.Printf("Couldn't build expression for query. Here's why: %v\n", err)
 } else {
  queryPaginator := dynamodb.NewQueryPaginator(basics.DynamoDbClient,
 &dynamodb.QueryInput{
   TableName:                 aws.String(basics.TableName),
   ExpressionAttributeNames:  expr.Names(),
   ExpressionAttributeValues: expr.Values(),
   KeyConditionExpression:    expr.KeyCondition(),
  })
  for queryPaginator.HasMorePages() {
   response, err = queryPaginator.NextPage(ctx)
   if err != nil {
```

```
    log.Printf("Couldn't query for movies released in %v. Here's why: %v\n",
releaseYear, err)
    break
   } else {
    var moviePage []Movie
    err = attributevalue.UnmarshalListOfMaps(response.Items, &moviePage)
    if err != nil {
     log.Printf("Couldn't unmarshal query response. Here's why: %v\n", err)
     break
    } else {
     movies = append(movies, moviePage...)
    }
   }
  }
 }
 return movies, err
}



// Scan gets all movies in the DynamoDB table that were released in a range of years
// and projects them to return a reduced set of fields.
// The function uses the `expression` package to build the filter and projection
// expressions.
func (basics TableBasics) Scan(ctx context.Context, startYear int, endYear int)
 ([]Movie, error) {
 var movies []Movie
 var err error
 var response *dynamodb.ScanOutput
 filtEx := expression.Name("year").Between(expression.Value(startYear),
 expression.Value(endYear))
 projEx := expression.NamesList(
  expression.Name("year"), expression.Name("title"), expression.Name("info.rating"))
 expr, err :=
 expression.NewBuilder().WithFilter(filtEx).WithProjection(projEx).Build()
 if err != nil {
  log.Printf("Couldn't build expressions for scan. Here's why: %v\n", err)
 } else {
  scanPaginator := dynamodb.NewScanPaginator(basics.DynamoDbClient,
 &dynamodb.ScanInput{
   TableName:                 aws.String(basics.TableName),
   ExpressionAttributeNames:  expr.Names(),
   ExpressionAttributeValues: expr.Values(),
   FilterExpression:          expr.Filter(),
```

```
   ProjectionExpression:      expr.Projection(),
  })
  for scanPaginator.HasMorePages() {
   response, err = scanPaginator.NextPage(ctx)
   if err != nil {
    log.Printf("Couldn't scan for movies released between %v and %v. Here's why: %v
\n",
     startYear, endYear, err)
    break
   } else {
    var moviePage []Movie
    err = attributevalue.UnmarshalListOfMaps(response.Items, &moviePage)
    if err != nil {
     log.Printf("Couldn't unmarshal query response. Here's why: %v\n", err)
     break
    } else {
     movies = append(movies, moviePage...)
    }
   }
  }
 }
 return movies, err
}



// DeleteMovie removes a movie from the DynamoDB table.
func (basics TableBasics) DeleteMovie(ctx context.Context, movie Movie) error {
 _, err := basics.DynamoDbClient.DeleteItem(ctx, &dynamodb.DeleteItemInput{
  TableName: aws.String(basics.TableName), Key: movie.GetKey(),
 })
 if err != nil {
  log.Printf("Couldn't delete %v from the table. Here's why: %v\n", movie.Title,
 err)
 }
 return err
}



// DeleteTable deletes the DynamoDB table and all of its data.
func (basics TableBasics) DeleteTable(ctx context.Context) error {
 _, err := basics.DynamoDbClient.DeleteTable(ctx, &dynamodb.DeleteTableInput{
  TableName: aws.String(basics.TableName)})
```

```
 if err != nil {
  log.Printf("Couldn't delete table %v. Here's why: %v\n", basics.TableName, err)
 }
 return err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - BatchWriteItem
  - CreateTable
  - DeleteItem
  - DeleteTable
  - DescribeTable
  - GetItem
  - PutItem
  - Query
  - Scan
  - UpdateItem

アクション

`BatchExecuteStatement`

次のコード例は、`BatchExecuteStatement` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

この例の関数レシーバー構造体を定義します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// PartiQLRunner encapsulates the Amazon DynamoDB service actions used in the
// PartiQL examples. It contains a DynamoDB service client that is used to act on
 the
// specified table.
type PartiQLRunner struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}
```

INSERT ステートメントのバッチを使用して項目を追加します。

```
// AddMovieBatch runs a batch of PartiQL INSERT statements to add multiple movies to
 the
// DynamoDB table.
func (runner PartiQLRunner) AddMovieBatch(ctx context.Context, movies []Movie) error
 {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year,
 movie.Info})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(fmt.Sprintf(
    "INSERT INTO \"%v\" VALUE {'title': ?, 'year': ?, 'info': ?}",
 runner.TableName)),
   Parameters: params,
```

```
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 if err != nil {
  log.Printf("Couldn't insert a batch of items with PartiQL. Here's why: %v\n", err)
 }
 return err
}
```

SELECT ステートメントのバッチを使用して項目を取得します。

```
// GetMovieBatch runs a batch of PartiQL SELECT statements to get multiple movies
 from
// the DynamoDB table by title and year.
func (runner PartiQLRunner) GetMovieBatch(ctx context.Context, movies []Movie)
 ([]Movie, error) {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(
    fmt.Sprintf("SELECT * FROM \"%v\" WHERE title=? AND year=?", runner.TableName)),
   Parameters: params,
  }
 }

 output, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 var outMovies []Movie
 if err != nil {
  log.Printf("Couldn't get a batch of items with PartiQL. Here's why: %v\n", err)
```

```
 } else {
  for _, response := range output.Responses {
   var movie Movie
   err = attributevalue.UnmarshalMap(response.Item, &movie)
   if err != nil {
    log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
   } else {
    outMovies = append(outMovies, movie)
   }
  }
 }
 return outMovies, err
}
```

UPDATE ステートメントのバッチを使用して項目を更新します。

```
// UpdateMovieBatch runs a batch of PartiQL UPDATE statements to update the rating
 of
// multiple movies that already exist in the DynamoDB table.
func (runner PartiQLRunner) UpdateMovieBatch(ctx context.Context, movies []Movie,
 ratings []float64) error {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{ratings[index],
 movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(
    fmt.Sprintf("UPDATE \"%v\" SET info.rating=? WHERE title=? AND year=?",
 runner.TableName)),
   Parameters: params,
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
```

```
 if err != nil {
  log.Printf("Couldn't update the batch of movies. Here's why: %v\n", err)
 }
 return err
}
```

DELETE ステートメントのバッチを使用して項目を削除します。

```
// DeleteMovieBatch runs a batch of PartiQL DELETE statements to remove multiple
 movies
// from the DynamoDB table.
func (runner PartiQLRunner) DeleteMovieBatch(ctx context.Context, movies []Movie)
 error {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(
    fmt.Sprintf("DELETE FROM \"%v\" WHERE title=? AND year=?", runner.TableName)),
   Parameters: params,
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 if err != nil {
  log.Printf("Couldn't delete the batch of movies. Here's why: %v\n", err)
 }
 return err
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
```

```
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「BatchExecuteStatement」を参照してください。

`BatchWriteItem`

次のコード例は、`BatchWriteItem` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}
```

```
// AddMovieBatch adds a slice of movies to the DynamoDB table. The function sends
// batches of 25 movies to DynamoDB until all movies are added or it reaches the
// specified maximum.
func (basics TableBasics) AddMovieBatch(ctx context.Context, movies []Movie,
 maxMovies int) (int, error) {
 var err error
 var item map[string]types.AttributeValue
 written := 0
 batchSize := 25 // DynamoDB allows a maximum batch size of 25 items.
 start := 0
 end := start + batchSize
 for start < maxMovies && start < len(movies) {
  var writeReqs []types.WriteRequest
  if end > len(movies) {
   end = len(movies)
  }
  for _, movie := range movies[start:end] {
   item, err = attributevalue.MarshalMap(movie)
   if err != nil {
    log.Printf("Couldn't marshal movie %v for batch writing. Here's why: %v\n",
 movie.Title, err)
   } else {
    writeReqs = append(
     writeReqs,
     types.WriteRequest{PutRequest: &types.PutRequest{Item: item}},
    )
   }
  }
  _, err = basics.DynamoDbClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
   RequestItems: map[string][]types.WriteRequest{basics.TableName: writeReqs}})
  if err != nil {
   log.Printf("Couldn't add a batch of movies to %v. Here's why: %v\n",
 basics.TableName, err)
  } else {
   written += len(writeReqs)
  }
  start = end
  end += batchSize
 }

 return written, err
```

```
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                `dynamodbav:"title"`
 Year  int                   `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
```

```
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「BatchWriteItem」を参照してください。

`CreateTable`

次のコード例は、`CreateTable` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)
```

```
// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// CreateMovieTable creates a DynamoDB table with a composite primary key defined as
// a string sort key named `title`, and a numeric partition key named `year`.
// This function uses NewTableExistsWaiter to wait for the table to be created by
// DynamoDB before it returns.
func (basics TableBasics) CreateMovieTable(ctx context.Context)
 (*types.TableDescription, error) {
 var tableDesc *types.TableDescription
 table, err := basics.DynamoDbClient.CreateTable(ctx, &dynamodb.CreateTableInput{
  AttributeDefinitions: []types.AttributeDefinition{{
   AttributeName: aws.String("year"),
   AttributeType: types.ScalarAttributeTypeN,
  }, {
   AttributeName: aws.String("title"),
   AttributeType: types.ScalarAttributeTypeS,
  }},
  KeySchema: []types.KeySchemaElement{{
   AttributeName: aws.String("year"),
   KeyType:       types.KeyTypeHash,
  }, {
   AttributeName: aws.String("title"),
   KeyType:       types.KeyTypeRange,
  }},
  TableName:   aws.String(basics.TableName),
  BillingMode: types.BillingModePayPerRequest,
 })
 if err != nil {
  log.Printf("Couldn't create table %v. Here's why: %v\n", basics.TableName, err)
 } else {
  waiter := dynamodb.NewTableExistsWaiter(basics.DynamoDbClient)
  err = waiter.Wait(ctx, &dynamodb.DescribeTableInput{
   TableName: aws.String(basics.TableName)}, 5*time.Minute)
  if err != nil {
   log.Printf("Wait for table exists failed. Here's why: %v\n", err)
  }
```

```
  tableDesc = table.TableDescription
  log.Printf("Ccreating table test")
 }
 return tableDesc, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateTable」を参照してください。

`DeleteItem`

次のコード例は、`DeleteItem` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
```

```
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// DeleteMovie removes a movie from the DynamoDB table.
func (basics TableBasics) DeleteMovie(ctx context.Context, movie Movie) error {
 _, err := basics.DynamoDbClient.DeleteItem(ctx, &dynamodb.DeleteItemInput{
  TableName: aws.String(basics.TableName), Key: movie.GetKey(),
 })
 if err != nil {
  log.Printf("Couldn't delete %v from the table. Here's why: %v\n", movie.Title,
 err)
 }
 return err
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                `dynamodbav:"title"`
```

```
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- API の詳細については、AWS SDK for Go API リファレンスのの「DeleteItem」を参照してください。

`DeleteTable`

次のコード例は、`DeleteTable` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// DeleteTable deletes the DynamoDB table and all of its data.
func (basics TableBasics) DeleteTable(ctx context.Context) error {
 _, err := basics.DynamoDbClient.DeleteTable(ctx, &dynamodb.DeleteTableInput{
  TableName: aws.String(basics.TableName)})
 if err != nil {
  log.Printf("Couldn't delete table %v. Here's why: %v\n", basics.TableName, err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteTable」を参照してください。

DescribeTable

次のコード例は、DescribeTable を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// TableExists determines whether a DynamoDB table exists.
func (basics TableBasics) TableExists(ctx context.Context) (bool, error) {
 exists := true
 _, err := basics.DynamoDbClient.DescribeTable(
  ctx, &dynamodb.DescribeTableInput{TableName: aws.String(basics.TableName)},
 )
 if err != nil {
  var notFoundEx *types.ResourceNotFoundException
  if errors.As(err, &notFoundEx) {
   log.Printf("Table %v does not exist.\n", basics.TableName)
```

```
    err = nil
   } else {
    log.Printf("Couldn't determine existence of table %v. Here's why: %v\n",
  basics.TableName, err)
   }
   exists = false
  }
  return exists, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeTable」を参照してください。

`ExecuteStatement`

次のコード例は、`ExecuteStatement` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

この例の関数レシーバー構造体を定義します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// PartiQLRunner encapsulates the Amazon DynamoDB service actions used in the
```

```
// PartiQL examples. It contains a DynamoDB service client that is used to act on
 the
// specified table.
type PartiQLRunner struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}
```

INSERT ステートメントを使用して項目を追加します。

```
// AddMovie runs a PartiQL INSERT statement to add a movie to the DynamoDB table.
func (runner PartiQLRunner) AddMovie(ctx context.Context, movie Movie) error {
 params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year,
 movie.Info})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("INSERT INTO \"%v\" VALUE {'title': ?, 'year': ?, 'info': ?}",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't insert an item with PartiQL. Here's why: %v\n", err)
 }
 return err
}
```

SELECT ステートメントを使用して項目を取得します。

```
// GetMovie runs a PartiQL SELECT statement to get a movie from the DynamoDB table
 by
// title and year.
func (runner PartiQLRunner) GetMovie(ctx context.Context, title string, year int)
 (Movie, error) {
```

```
 var movie Movie
 params, err := attributevalue.MarshalList([]interface{}{title, year})
 if err != nil {
  panic(err)
 }
 response, err := runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("SELECT * FROM \"%v\" WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't get info about %v. Here's why: %v\n", title, err)
 } else {
  err = attributevalue.UnmarshalMap(response.Items[0], &movie)
  if err != nil {
   log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
  }
 }
 return movie, err
}
```

SELECT ステートメントを使用して、項目のリストを取得し、結果を射影します。

```
// GetAllMovies runs a PartiQL SELECT statement to get all movies from the DynamoDB
 table.
// pageSize is not typically required and is used to show how to paginate the
 results.
// The results are projected to return only the title and rating of each movie.
func (runner PartiQLRunner) GetAllMovies(ctx context.Context, pageSize int32)
 ([]map[string]interface{}, error) {
 var output []map[string]interface{}
 var response *dynamodb.ExecuteStatementOutput
 var err error
 var nextToken *string
 for moreData := true; moreData; {
  response, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
   Statement: aws.String(
```

```
    fmt.Sprintf("SELECT title, info.rating FROM \"%v\"", runner.TableName)),
   Limit:     aws.Int32(pageSize),
   NextToken: nextToken,
  })
  if err != nil {
   log.Printf("Couldn't get movies. Here's why: %v\n", err)
   moreData = false
  } else {
   var pageOutput []map[string]interface{}
   err = attributevalue.UnmarshalListOfMaps(response.Items, &pageOutput)
   if err != nil {
    log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
   } else {
    log.Printf("Got a page of length %v.\n", len(response.Items))
    output = append(output, pageOutput...)
   }
   nextToken = response.NextToken
   moreData = nextToken != nil
  }
 }
 return output, err
}
```

UPDATE ステートメントを使用して項目を更新します。

```
// UpdateMovie runs a PartiQL UPDATE statement to update the rating of a movie that
// already exists in the DynamoDB table.
func (runner PartiQLRunner) UpdateMovie(ctx context.Context, movie Movie, rating
 float64) error {
 params, err := attributevalue.MarshalList([]interface{}{rating, movie.Title,
 movie.Year})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("UPDATE \"%v\" SET info.rating=? WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
```

```
 })
 if err != nil {
  log.Printf("Couldn't update movie %v. Here's why: %v\n", movie.Title, err)
 }
 return err
}
```

DELETE ステートメントを使用して項目を削除します。

```
// DeleteMovie runs a PartiQL DELETE statement to remove a movie from the DynamoDB
 table.
func (runner PartiQLRunner) DeleteMovie(ctx context.Context, movie Movie) error {
 params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("DELETE FROM \"%v\" WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't delete %v from the table. Here's why: %v\n", movie.Title,
 err)
 }
 return err
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
```

```
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ExecuteStatement」を参照してください。

`GetItem`

次のコード例は、`GetItem` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// GetMovie gets movie data from the DynamoDB table by using the primary composite
 key
// made of title and year.
```

```
func (basics TableBasics) GetMovie(ctx context.Context, title string, year int)
 (Movie, error) {
 movie := Movie{Title: title, Year: year}
 response, err := basics.DynamoDbClient.GetItem(ctx, &dynamodb.GetItemInput{
  Key: movie.GetKey(), TableName: aws.String(basics.TableName),
 })
 if err != nil {
  log.Printf("Couldn't get info about %v. Here's why: %v\n", title, err)
 } else {
  err = attributevalue.UnmarshalMap(response.Item, &movie)
  if err != nil {
   log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
  }
 }
 return movie, err
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                `dynamodbav:"title"`
 Year  int                   `dynamodbav:"year"`
```

```
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「GetItem」を参照してください。

`ListTables`

次のコード例は、`ListTables` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// ListTables lists the DynamoDB table names for the current account.
func (basics TableBasics) ListTables(ctx context.Context) ([]string, error) {
 var tableNames []string
 var output *dynamodb.ListTablesOutput
 var err error
 tablePaginator := dynamodb.NewListTablesPaginator(basics.DynamoDbClient,
 &dynamodb.ListTablesInput{})
 for tablePaginator.HasMorePages() {
  output, err = tablePaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't list tables. Here's why: %v\n", err)
   break
  } else {
   tableNames = append(tableNames, output.TableNames...)
  }
 }
 return tableNames, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListTables」を参照してください。

`PutItem`

次のコード例は、`PutItem` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}
```

```
// AddMovie adds a movie the DynamoDB table.
func (basics TableBasics) AddMovie(ctx context.Context, movie Movie) error {
 item, err := attributevalue.MarshalMap(movie)
 if err != nil {
  panic(err)
 }
 _, err = basics.DynamoDbClient.PutItem(ctx, &dynamodb.PutItemInput{
  TableName: aws.String(basics.TableName), Item: item,
 })
 if err != nil {
  log.Printf("Couldn't add item to table. Here's why: %v\n", err)
 }
 return err
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}
```

```
// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「PutItem」を参照してください。

Query

次のコード例は、Query を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
```

```
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// Query gets all movies in the DynamoDB table that were released in the specified
 year.
// The function uses the `expression` package to build the key condition expression
// that is used in the query.
func (basics TableBasics) Query(ctx context.Context, releaseYear int) ([]Movie,
 error) {
 var err error
 var response *dynamodb.QueryOutput
 var movies []Movie
 keyEx := expression.Key("year").Equal(expression.Value(releaseYear))
 expr, err := expression.NewBuilder().WithKeyCondition(keyEx).Build()
 if err != nil {
  log.Printf("Couldn't build expression for query. Here's why: %v\n", err)
 } else {
  queryPaginator := dynamodb.NewQueryPaginator(basics.DynamoDbClient,
 &dynamodb.QueryInput{
   TableName:                 aws.String(basics.TableName),
   ExpressionAttributeNames:  expr.Names(),
   ExpressionAttributeValues: expr.Values(),
   KeyConditionExpression:    expr.KeyCondition(),
  })
  for queryPaginator.HasMorePages() {
```

```
   response, err = queryPaginator.NextPage(ctx)
   if err != nil {
    log.Printf("Couldn't query for movies released in %v. Here's why: %v\n",
 releaseYear, err)
    break
   } else {
    var moviePage []Movie
    err = attributevalue.UnmarshalListOfMaps(response.Items, &moviePage)
    if err != nil {
     log.Printf("Couldn't unmarshal query response. Here's why: %v\n", err)
     break
    } else {
     movies = append(movies, moviePage...)
    }
   }
  }
 }
 return movies, err
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
```

```
type Movie struct {
 Title string                `dynamodbav:"title"`
 Year  int                   `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「Query」を参照してください。

Scan

次のコード例は、Scan を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// Scan gets all movies in the DynamoDB table that were released in a range of years
// and projects them to return a reduced set of fields.
// The function uses the `expression` package to build the filter and projection
// expressions.
func (basics TableBasics) Scan(ctx context.Context, startYear int, endYear int)
 ([]Movie, error) {
 var movies []Movie
 var err error
 var response *dynamodb.ScanOutput
 filtEx := expression.Name("year").Between(expression.Value(startYear),
 expression.Value(endYear))
 projEx := expression.NamesList(
  expression.Name("year"), expression.Name("title"), expression.Name("info.rating"))
 expr, err :=
 expression.NewBuilder().WithFilter(filtEx).WithProjection(projEx).Build()
 if err != nil {
  log.Printf("Couldn't build expressions for scan. Here's why: %v\n", err)
 } else {
```

```
  scanPaginator := dynamodb.NewScanPaginator(basics.DynamoDbClient,
 &dynamodb.ScanInput{
   TableName:                 aws.String(basics.TableName),
   ExpressionAttributeNames:  expr.Names(),
   ExpressionAttributeValues: expr.Values(),
   FilterExpression:          expr.Filter(),
   ProjectionExpression:      expr.Projection(),
  })
  for scanPaginator.HasMorePages() {
   response, err = scanPaginator.NextPage(ctx)
   if err != nil {
    log.Printf("Couldn't scan for movies released between %v and %v. Here's why: %v
\n",
     startYear, endYear, err)
    break
   } else {
    var moviePage []Movie
    err = attributevalue.UnmarshalListOfMaps(response.Items, &moviePage)
    if err != nil {
     log.Printf("Couldn't unmarshal query response. Here's why: %v\n", err)
     break
    } else {
     movies = append(movies, moviePage...)
    }
   }
  }
 }
 return movies, err
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"
```

```
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「Scan」を参照してください。

UpdateItem

次のコード例は、UpdateItem を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// TableBasics encapsulates the Amazon DynamoDB service actions used in the
 examples.
// It contains a DynamoDB service client that is used to act on the specified table.
type TableBasics struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// UpdateMovie updates the rating and plot of a movie that already exists in the
// DynamoDB table. This function uses the `expression` package to build the update
// expression.
func (basics TableBasics) UpdateMovie(ctx context.Context, movie Movie)
 (map[string]map[string]interface{}, error) {
 var err error
 var response *dynamodb.UpdateItemOutput
```

```
 var attributeMap map[string]map[string]interface{}
 update := expression.Set(expression.Name("info.rating"),
 expression.Value(movie.Info["rating"]))
 update.Set(expression.Name("info.plot"), expression.Value(movie.Info["plot"]))
 expr, err := expression.NewBuilder().WithUpdate(update).Build()
 if err != nil {
  log.Printf("Couldn't build expression for update. Here's why: %v\n", err)
 } else {
  response, err = basics.DynamoDbClient.UpdateItem(ctx, &dynamodb.UpdateItemInput{
   TableName:                 aws.String(basics.TableName),
   Key:                       movie.GetKey(),
   ExpressionAttributeNames:  expr.Names(),
   ExpressionAttributeValues: expr.Values(),
   UpdateExpression:          expr.Update(),
   ReturnValues:              types.ReturnValueUpdatedNew,
  })
  if err != nil {
   log.Printf("Couldn't update movie %v. Here's why: %v\n", movie.Title, err)
  } else {
   err = attributevalue.UnmarshalMap(response.Attributes, &attributeMap)
   if err != nil {
    log.Printf("Couldn't unmarshall update response. Here's why: %v\n", err)
   }
  }
 }
 return attributeMap, err
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
```

```
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「UpdateItem」を参照してください。

シナリオ

PartiQL ステートメントのバッチを使用してテーブルに対してクエリを実行する

次のコードサンプルは、以下の操作方法を示しています。

- 複数の SELECT ステートメントを実行して、項目のバッチを取得します。
- 複数の INSERT ステートメントを実行して、項目のバッチを追加する。
- 複数の UPDATE ステートメントを実行して、項目のバッチを更新する。
- 複数の DELETE ステートメントを実行して、項目のバッチを削除します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

テーブルを作成し、PartiQL クエリのバッチを実行するシナリオを実行します。

```
import (
 "context"
 "fmt"
 "log"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/dynamodb/actions"
)

// RunPartiQLBatchScenario shows you how to use the AWS SDK for Go
// to run batches of PartiQL statements to query a table that stores data about
 movies.
//
//   - Use batches of PartiQL statements to add, get, update, and delete data for
//     individual movies.
```

```
//
// This example creates an Amazon DynamoDB service client from the specified
 sdkConfig so that
// you can replace it with a mocked or stubbed config for unit testing.
//
// This example creates and deletes a DynamoDB table to use during the scenario.
func RunPartiQLBatchScenario(ctx context.Context, sdkConfig aws.Config, tableName
 string) {
 defer func() {
  if r := recover(); r != nil {
   fmt.Printf("Something went wrong with the demo.")
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon DynamoDB PartiQL batch demo.")
 log.Println(strings.Repeat("-", 88))

 tableBasics := actions.TableBasics{
  DynamoDbClient: dynamodb.NewFromConfig(sdkConfig),
  TableName:      tableName,
 }
 runner := actions.PartiQLRunner{
  DynamoDbClient: dynamodb.NewFromConfig(sdkConfig),
  TableName:      tableName,
 }

 exists, err := tableBasics.TableExists(ctx)
 if err != nil {
  panic(err)
 }
 if !exists {
  log.Printf("Creating table %v...\n", tableName)
  _, err = tableBasics.CreateMovieTable(ctx)
  if err != nil {
   panic(err)
  } else {
   log.Printf("Created table %v.\n", tableName)
  }
 } else {
  log.Printf("Table %v already exists.\n", tableName)
 }
 log.Println(strings.Repeat("-", 88))
```

```
currentYear, _, _ := time.Now().Date()
customMovies := []actions.Movie{{
 Title: "House PartiQL",
 Year:  currentYear - 5,
 Info: map[string]interface{}{
  "plot":   "Wacky high jinks result from querying a mysterious database.",
  "rating": 8.5}}, {
 Title: "House PartiQL 2",
 Year:  currentYear - 3,
 Info: map[string]interface{}{
  "plot":   "Moderate high jinks result from querying another mysterious
database.",
  "rating": 6.5}}, {
 Title: "House PartiQL 3",
 Year:  currentYear - 1,
 Info: map[string]interface{}{
  "plot":   "Tepid high jinks result from querying yet another mysterious
database.",
  "rating": 2.5},
},
}

log.Printf("Inserting a batch of movies into table '%v'.\n", tableName)
err = runner.AddMovieBatch(ctx, customMovies)
if err == nil {
 log.Printf("Added %v movies to the table.\n", len(customMovies))
}
log.Println(strings.Repeat("-", 88))

log.Println("Getting data for a batch of movies.")
movies, err := runner.GetMovieBatch(ctx, customMovies)
if err == nil {
 for _, movie := range movies {
  log.Println(movie)
 }
}
log.Println(strings.Repeat("-", 88))

newRatings := []float64{7.7, 4.4, 1.1}
log.Println("Updating a batch of movies with new ratings.")
err = runner.UpdateMovieBatch(ctx, customMovies, newRatings)
if err == nil {
 log.Printf("Updated %v movies with new ratings.\n", len(customMovies))
}
```

```
 log.Println(strings.Repeat("-", 88))

 log.Println("Getting projected data from the table to verify our update.")
 log.Println("Using a page size of 2 to demonstrate paging.")
 projections, err := runner.GetAllMovies(ctx, 2)
 if err == nil {
  log.Println("All movies:")
  for _, projection := range projections {
   log.Println(projection)
  }
 }
 log.Println(strings.Repeat("-", 88))

 log.Println("Deleting a batch of movies.")
 err = runner.DeleteMovieBatch(ctx, customMovies)
 if err == nil {
  log.Printf("Deleted %v movies.\n", len(customMovies))
 }

 err = tableBasics.DeleteTable(ctx)
 if err == nil {
  log.Printf("Deleted table %v.\n", tableBasics.TableName)
 }

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
 "fmt"
 "io"
 "log"
 "net/http"
```

```
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

PartiQL ステートメントを実行する struct およびメソッドを作成します。

```
import (
 "context"
```

```
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// PartiQLRunner encapsulates the Amazon DynamoDB service actions used in the
// PartiQL examples. It contains a DynamoDB service client that is used to act on
 the
// specified table.
type PartiQLRunner struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// AddMovieBatch runs a batch of PartiQL INSERT statements to add multiple movies to
 the
// DynamoDB table.
func (runner PartiQLRunner) AddMovieBatch(ctx context.Context, movies []Movie) error
 {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year,
 movie.Info})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(fmt.Sprintf(
    "INSERT INTO \"%v\" VALUE {'title': ?, 'year': ?, 'info': ?}",
 runner.TableName)),
   Parameters: params,
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
```

```
 if err != nil {
  log.Printf("Couldn't insert a batch of items with PartiQL. Here's why: %v\n", err)
 }
 return err
}



// GetMovieBatch runs a batch of PartiQL SELECT statements to get multiple movies
 from
// the DynamoDB table by title and year.
func (runner PartiQLRunner) GetMovieBatch(ctx context.Context, movies []Movie)
 ([]Movie, error) {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(
    fmt.Sprintf("SELECT * FROM \"%v\" WHERE title=? AND year=?", runner.TableName)),
   Parameters: params,
  }
 }

 output, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 var outMovies []Movie
 if err != nil {
  log.Printf("Couldn't get a batch of items with PartiQL. Here's why: %v\n", err)
 } else {
  for _, response := range output.Responses {
   var movie Movie
   err = attributevalue.UnmarshalMap(response.Item, &movie)
   if err != nil {
    log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
   } else {
    outMovies = append(outMovies, movie)
   }
  }
 }
```

```
 return outMovies, err
}



// GetAllMovies runs a PartiQL SELECT statement to get all movies from the DynamoDB
 table.
// pageSize is not typically required and is used to show how to paginate the
 results.
// The results are projected to return only the title and rating of each movie.
func (runner PartiQLRunner) GetAllMovies(ctx context.Context, pageSize int32)
 ([]map[string]interface{}, error) {
 var output []map[string]interface{}
 var response *dynamodb.ExecuteStatementOutput
 var err error
 var nextToken *string
 for moreData := true; moreData; {
  response, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
   Statement: aws.String(
    fmt.Sprintf("SELECT title, info.rating FROM \"%v\"", runner.TableName)),
   Limit:     aws.Int32(pageSize),
   NextToken: nextToken,
  })
  if err != nil {
   log.Printf("Couldn't get movies. Here's why: %v\n", err)
   moreData = false
  } else {
   var pageOutput []map[string]interface{}
   err = attributevalue.UnmarshalListOfMaps(response.Items, &pageOutput)
   if err != nil {
    log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
   } else {
    log.Printf("Got a page of length %v.\n", len(response.Items))
    output = append(output, pageOutput...)
   }
   nextToken = response.NextToken
   moreData = nextToken != nil
  }
 }
 return output, err
}
```

```
// UpdateMovieBatch runs a batch of PartiQL UPDATE statements to update the rating
 of
// multiple movies that already exist in the DynamoDB table.
func (runner PartiQLRunner) UpdateMovieBatch(ctx context.Context, movies []Movie,
 ratings []float64) error {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{ratings[index],
 movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(
    fmt.Sprintf("UPDATE \"%v\" SET info.rating=? WHERE title=? AND year=?",
 runner.TableName)),
   Parameters: params,
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 if err != nil {
  log.Printf("Couldn't update the batch of movies. Here's why: %v\n", err)
 }
 return err
}



// DeleteMovieBatch runs a batch of PartiQL DELETE statements to remove multiple
 movies
// from the DynamoDB table.
func (runner PartiQLRunner) DeleteMovieBatch(ctx context.Context, movies []Movie)
 error {
 statementRequests := make([]types.BatchStatementRequest, len(movies))
 for index, movie := range movies {
  params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
  if err != nil {
   panic(err)
  }
```

```
  statementRequests[index] = types.BatchStatementRequest{
   Statement: aws.String(
    fmt.Sprintf("DELETE FROM \"%v\" WHERE title=? AND year=?", runner.TableName)),
   Parameters: params,
  }
 }

 _, err := runner.DynamoDbClient.BatchExecuteStatement(ctx,
 &dynamodb.BatchExecuteStatementInput{
  Statements: statementRequests,
 })
 if err != nil {
  log.Printf("Couldn't delete the batch of movies. Here's why: %v\n", err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「BatchExecuteStatement」を参照してください。

PartiQL を使用してテーブルに対してクエリを実行する

次のコードサンプルは、以下の操作方法を示しています。

- SELECT ステートメントを実行して項目を取得します。
- INSERT 文を実行して項目を追加する。
- UPDATE ステートメントを使用して項目を更新する。
- DELETE ステートメントを実行して項目を削除します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

テーブルを作成し、PartiQL クエリを実行するシナリオを実行します。

```
import (
 "context"
 "fmt"
 "log"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/dynamodb/actions"
)

// RunPartiQLSingleScenario shows you how to use the AWS SDK for Go
// to use PartiQL to query a table that stores data about movies.
//
// * Use PartiQL statements to add, get, update, and delete data for individual
 movies.
//
// This example creates an Amazon DynamoDB service client from the specified
 sdkConfig so that
// you can replace it with a mocked or stubbed config for unit testing.
//
// This example creates and deletes a DynamoDB table to use during the scenario.
func RunPartiQLSingleScenario(ctx context.Context, sdkConfig aws.Config, tableName
 string) {
 defer func() {
  if r := recover(); r != nil {
   fmt.Printf("Something went wrong with the demo.")
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon DynamoDB PartiQL single action demo.")
 log.Println(strings.Repeat("-", 88))

 tableBasics := actions.TableBasics{
  DynamoDbClient: dynamodb.NewFromConfig(sdkConfig),
  TableName:      tableName,
 }
 runner := actions.PartiQLRunner{
  DynamoDbClient: dynamodb.NewFromConfig(sdkConfig),
  TableName:      tableName,
```

```
}

exists, err := tableBasics.TableExists(ctx)
if err != nil {
 panic(err)
}
if !exists {
 log.Printf("Creating table %v...\n", tableName)
 _, err = tableBasics.CreateMovieTable(ctx)
 if err != nil {
  panic(err)
 } else {
  log.Printf("Created table %v.\n", tableName)
 }
} else {
 log.Printf("Table %v already exists.\n", tableName)
}
log.Println(strings.Repeat("-", 88))

currentYear, _, _ := time.Now().Date()
customMovie := actions.Movie{
 Title: "24 Hour PartiQL People",
 Year:  currentYear,
 Info: map[string]interface{}{
  "plot":   "A group of data developers discover a new query language they can't
stop using.",
  "rating": 9.9,
 },
}

log.Printf("Inserting movie '%v' released in %v.", customMovie.Title,
customMovie.Year)
err = runner.AddMovie(ctx, customMovie)
if err == nil {
 log.Printf("Added %v to the movie table.\n", customMovie.Title)
}
log.Println(strings.Repeat("-", 88))

log.Printf("Getting data for movie '%v' released in %v.", customMovie.Title,
customMovie.Year)
movie, err := runner.GetMovie(ctx, customMovie.Title, customMovie.Year)
if err == nil {
 log.Println(movie)
}
```

```
 log.Println(strings.Repeat("-", 88))

 newRating := 6.6
 log.Printf("Updating movie '%v' with a rating of %v.", customMovie.Title,
 newRating)
 err = runner.UpdateMovie(ctx, customMovie, newRating)
 if err == nil {
  log.Printf("Updated %v with a new rating.\n", customMovie.Title)
 }
 log.Println(strings.Repeat("-", 88))

 log.Printf("Getting data again to verify the update.")
 movie, err = runner.GetMovie(ctx, customMovie.Title, customMovie.Year)
 if err == nil {
  log.Println(movie)
 }
 log.Println(strings.Repeat("-", 88))

 log.Printf("Deleting movie '%v'.\n", customMovie.Title)
 err = runner.DeleteMovie(ctx, customMovie)
 if err == nil {
  log.Printf("Deleted %v.\n", customMovie.Title)
 }

 err = tableBasics.DeleteTable(ctx)
 if err == nil {
  log.Printf("Deleted table %v.\n", tableBasics.TableName)
 }

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

この例で使用している Movie struct を定義します。

```
import (
 "archive/zip"
 "bytes"
 "encoding/json"
```

```
 "fmt"
 "io"
 "log"
 "net/http"

 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// Movie encapsulates data about a movie. Title and Year are the composite primary
 key
// of the movie in Amazon DynamoDB. Title is the sort key, Year is the partition
 key,
// and Info is additional data.
type Movie struct {
 Title string                 `dynamodbav:"title"`
 Year  int                    `dynamodbav:"year"`
 Info  map[string]interface{} `dynamodbav:"info"`
}

// GetKey returns the composite primary key of the movie in a format that can be
// sent to DynamoDB.
func (movie Movie) GetKey() map[string]types.AttributeValue {
 title, err := attributevalue.Marshal(movie.Title)
 if err != nil {
  panic(err)
 }
 year, err := attributevalue.Marshal(movie.Year)
 if err != nil {
  panic(err)
 }
 return map[string]types.AttributeValue{"title": title, "year": year}
}

// String returns the title, year, rating, and plot of a movie, formatted for the
 example.
func (movie Movie) String() string {
 return fmt.Sprintf("%v\n\tReleased: %v\n\tRating: %v\n\tPlot: %v\n",
  movie.Title, movie.Year, movie.Info["rating"], movie.Info["plot"])
}
```

PartiQL ステートメントを実行する struct およびメソッドを作成します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// PartiQLRunner encapsulates the Amazon DynamoDB service actions used in the
// PartiQL examples. It contains a DynamoDB service client that is used to act on
 the
// specified table.
type PartiQLRunner struct {
 DynamoDbClient *dynamodb.Client
 TableName      string
}



// AddMovie runs a PartiQL INSERT statement to add a movie to the DynamoDB table.
func (runner PartiQLRunner) AddMovie(ctx context.Context, movie Movie) error {
 params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year,
 movie.Info})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("INSERT INTO \"%v\" VALUE {'title': ?, 'year': ?, 'info': ?}",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't insert an item with PartiQL. Here's why: %v\n", err)
 }
 return err
}
```

```
// GetMovie runs a PartiQL SELECT statement to get a movie from the DynamoDB table
 by
// title and year.
func (runner PartiQLRunner) GetMovie(ctx context.Context, title string, year int)
 (Movie, error) {
 var movie Movie
 params, err := attributevalue.MarshalList([]interface{}{title, year})
 if err != nil {
  panic(err)
 }
 response, err := runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("SELECT * FROM \"%v\" WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't get info about %v. Here's why: %v\n", title, err)
 } else {
  err = attributevalue.UnmarshalMap(response.Items[0], &movie)
  if err != nil {
   log.Printf("Couldn't unmarshal response. Here's why: %v\n", err)
  }
 }
 return movie, err
}



// UpdateMovie runs a PartiQL UPDATE statement to update the rating of a movie that
// already exists in the DynamoDB table.
func (runner PartiQLRunner) UpdateMovie(ctx context.Context, movie Movie, rating
 float64) error {
 params, err := attributevalue.MarshalList([]interface{}{rating, movie.Title,
 movie.Year})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
```

```
  Statement: aws.String(
   fmt.Sprintf("UPDATE \"%v\" SET info.rating=? WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't update movie %v. Here's why: %v\n", movie.Title, err)
 }
 return err
}



// DeleteMovie runs a PartiQL DELETE statement to remove a movie from the DynamoDB
 table.
func (runner PartiQLRunner) DeleteMovie(ctx context.Context, movie Movie) error {
 params, err := attributevalue.MarshalList([]interface{}{movie.Title, movie.Year})
 if err != nil {
  panic(err)
 }
 _, err = runner.DynamoDbClient.ExecuteStatement(ctx,
 &dynamodb.ExecuteStatementInput{
  Statement: aws.String(
   fmt.Sprintf("DELETE FROM \"%v\" WHERE title=? AND year=?",
    runner.TableName)),
  Parameters: params,
 })
 if err != nil {
  log.Printf("Couldn't delete %v from the table. Here's why: %v\n", movie.Title,
 err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ExecuteStatement」を参照してください。

サーバーレスサンプル

DynamoDB トリガーから Lambda 関数を呼び出す

次のコード例は、DynamoDB ストリームからレコードを受信することによってトリガーされるイベントを受け取る、Lambda 関数の実装方法を示しています。関数は DynamoDB ペイロードを取得し、レコードの内容をログ記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用して Lambda で DynamoDB イベントの消費。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-lambda-go/events"
 "fmt"
)

func HandleRequest(ctx context.Context, event events.DynamoDBEvent) (*string, error)
 {
 if len(event.Records) == 0 {
  return nil, fmt.Errorf("received empty event")
 }

 for _, record := range event.Records {
   LogDynamoDBRecord(record)
 }

 message := fmt.Sprintf("Records processed: %d", len(event.Records))
 return &message, nil
}
```

```
func main() {
 lambda.Start(HandleRequest)
}

func LogDynamoDBRecord(record events.DynamoDBEventRecord){
 fmt.Println(record.EventID)
 fmt.Println(record.EventName)
 fmt.Printf("%+v\n", record.Change)
}
```

DynamoDB トリガーで Lambda 関数のバッチアイテムの失敗をレポートする

次のコード例は、DynamoDB ストリームからイベントを受け取る Lambda 関数の部分的なバッチレスポンスの実装方法を示しています。この関数は、レスポンスとしてバッチアイテムの失敗を報告し、対象のメッセージを後で再試行するよう Lambda に伝えます。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用して Lambda で DynamoDB のバッチアイテム失敗のレポート。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

type BatchItemFailure struct {
 ItemIdentifier string `json:"ItemIdentifier"`
}
```

```
type BatchResult struct {
 BatchItemFailures []BatchItemFailure `json:"BatchItemFailures"`
}

func HandleRequest(ctx context.Context, event events.DynamoDBEvent) (*BatchResult,
 error) {
 var batchItemFailures []BatchItemFailure
 curRecordSequenceNumber := ""

 for _, record := range event.Records {
  // Process your record
  curRecordSequenceNumber = record.Change.SequenceNumber
 }

 if curRecordSequenceNumber != "" {
  batchItemFailures = append(batchItemFailures, BatchItemFailure{ItemIdentifier:
 curRecordSequenceNumber})
 }

 batchResult := BatchResult{
  BatchItemFailures: batchItemFailures,
 }

 return &batchResult, nil
}

func main() {
 lambda.Start(HandleRequest)
}
```

AWS コミュニティへの貢献

サーバーレスアプリケーションの構築とテスト

次のコード例は、Lambda および DynamoDB を備えた API Gateway を使用してサーバーレスアプリケーションを構築およびテストする方法を示しています。

SDK for Go V2

Go SDK を使用し、Lambda および DynamoDB を備えた API Gateway で構成されるサーバーレスアプリケーションを構築およびテストする方法が示されます。

完全なソースコードとセットアップおよび実行の手順については、GitHub で完全な例を参照してください。

この例で使用されているサービス

- API ゲートウェイ
- DynamoDB
- Lambda

Go V2 を使用した IAM の例

次のコード例は、IAM で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

基本 は、重要なオペレーションをサービス内で実行する方法を示すコード例です。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- はじめに
- 基本
- アクション

はじめに

IAM へようこそ

次のコード例は、IAM の使用を開始する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/iam"
)

// main uses the AWS SDK for Go (v2) to create an AWS Identity and Access Management
 (IAM)
// client and list up to 10 policies in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 iamClient := iam.NewFromConfig(sdkConfig)
 const maxPols = 10
 fmt.Printf("Let's list up to %v policies for your account.\n", maxPols)
 result, err := iamClient.ListPolicies(ctx, &iam.ListPoliciesInput{
  MaxItems: aws.Int32(maxPols),
 })
 if err != nil {
  fmt.Printf("Couldn't list policies for your account. Here's why: %v\n", err)
```

```
  return
 }
 if len(result.Policies) == 0 {
  fmt.Println("You don't have any policies!")
 } else {
  for _, policy := range result.Policies {
   fmt.Printf("\t%v\n", *policy.PolicyName)
  }
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListPolicies」を参照してください。

基本

基本を学ぶ

次のコード例は、ユーザーを作成してロールを割り当てる方法を示しています。

> **Warning**
>
> セキュリティリスクを避けるため、専用ソフトウェアを開発するときや実際のデータを扱うときは、IAM ユーザーを認証に使用しないでください。代わりに、AWS IAM アイデンティティセンター などの ID プロバイダーとのフェデレーションを使用してください。

- 権限のないユーザーを作成します。
- アカウントの Amazon S3 バケットを一覧表示する権限を付与するロールを作成します。
- ユーザーがロールを引き受けられるようにポリシーを追加します。
- ロールを引き受け、一時的な認証情報を使用して S3 バケットを一覧表示し、リソースをクリーンアップします。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

コマンドプロンプトからインタラクティブのシナリオを実行します。

```
import (
 "context"
 "errors"
 "fmt"
 "log"
 "math/rand"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/credentials"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/sts"
 "github.com/aws/smithy-go"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/iam/actions"
)

// AssumeRoleScenario shows you how to use the AWS Identity and Access Management
 (IAM)
// service to perform the following actions:
//
//  1. Create a user who has no permissions.
//  2. Create a role that grants permission to list Amazon Simple Storage Service
//     (Amazon S3) buckets for the account.
//  3. Add a policy to let the user assume the role.
//  4. Try and fail to list buckets without permissions.
//  5. Assume the role and list S3 buckets using temporary credentials.
//  6. Delete the policy, role, and user.
```

```
type AssumeRoleScenario struct {
 sdkConfig      aws.Config
 accountWrapper actions.AccountWrapper
 policyWrapper  actions.PolicyWrapper
 roleWrapper    actions.RoleWrapper
 userWrapper    actions.UserWrapper
 questioner     demotools.IQuestioner
 helper         IScenarioHelper
 isTestRun      bool
}

// NewAssumeRoleScenario constructs an AssumeRoleScenario instance from a
 configuration.
// It uses the specified config to get an IAM client and create wrappers for the
 actions
// used in the scenario.
func NewAssumeRoleScenario(sdkConfig aws.Config, questioner demotools.IQuestioner,
 helper IScenarioHelper) AssumeRoleScenario {
 iamClient := iam.NewFromConfig(sdkConfig)
 return AssumeRoleScenario{
  sdkConfig:      sdkConfig,
  accountWrapper: actions.AccountWrapper{IamClient: iamClient},
  policyWrapper:  actions.PolicyWrapper{IamClient: iamClient},
  roleWrapper:    actions.RoleWrapper{IamClient: iamClient},
  userWrapper:    actions.UserWrapper{IamClient: iamClient},
  questioner:     questioner,
  helper:         helper,
 }
}

// addTestOptions appends the API options specified in the original configuration to
// another configuration. This is used to attach the middleware stubber to clients
// that are constructed during the scenario, which is needed for unit testing.
func (scenario AssumeRoleScenario) addTestOptions(scenarioConfig *aws.Config) {
 if scenario.isTestRun {
  scenarioConfig.APIOptions = append(scenarioConfig.APIOptions,
 scenario.sdkConfig.APIOptions...)
 }
}

// Run runs the interactive scenario.
func (scenario AssumeRoleScenario) Run(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
```

```
    log.Printf("Something went wrong with the demo.\n")
    log.Println(r)
   }
  }()

  log.Println(strings.Repeat("-", 88))
  log.Println("Welcome to the AWS Identity and Access Management (IAM) assume role
  demo.")
  log.Println(strings.Repeat("-", 88))

  user := scenario.CreateUser(ctx)
  accessKey := scenario.CreateAccessKey(ctx, user)
  role := scenario.CreateRoleAndPolicies(ctx, user)
  noPermsConfig := scenario.ListBucketsWithoutPermissions(ctx, accessKey)
  scenario.ListBucketsWithAssumedRole(ctx, noPermsConfig, role)
  scenario.Cleanup(ctx, user, role)

  log.Println(strings.Repeat("-", 88))
  log.Println("Thanks for watching!")
  log.Println(strings.Repeat("-", 88))
}

// CreateUser creates a new IAM user. This user has no permissions.
func (scenario AssumeRoleScenario) CreateUser(ctx context.Context) *types.User {
  log.Println("Let's create an example user with no permissions.")
  userName := scenario.questioner.Ask("Enter a name for the example user:",
  demotools.NotEmpty{})
  user, err := scenario.userWrapper.GetUser(ctx, userName)
  if err != nil {
   panic(err)
  }
  if user == nil {
   user, err = scenario.userWrapper.CreateUser(ctx, userName)
   if err != nil {
    panic(err)
   }
   log.Printf("Created user %v.\n", *user.UserName)
  } else {
   log.Printf("User %v already exists.\n", *user.UserName)
  }
  log.Println(strings.Repeat("-", 88))
  return user
}
```

```
// CreateAccessKey creates an access key for the user.
func (scenario AssumeRoleScenario) CreateAccessKey(ctx context.Context, user
 *types.User) *types.AccessKey {
 accessKey, err := scenario.userWrapper.CreateAccessKeyPair(ctx, *user.UserName)
 if err != nil {
  panic(err)
 }
 log.Printf("Created access key %v for your user.", *accessKey.AccessKeyId)
 log.Println("Waiting a few seconds for your user to be ready...")
 scenario.helper.Pause(10)
 log.Println(strings.Repeat("-", 88))
 return accessKey
}

// CreateRoleAndPolicies creates a policy that grants permission to list S3 buckets
 for
// the current account and attaches the policy to a newly created role. It also adds
 an
// inline policy to the specified user that grants the user permission to assume the
 role.
func (scenario AssumeRoleScenario) CreateRoleAndPolicies(ctx context.Context, user
 *types.User) *types.Role {
 log.Println("Let's create a role and policy that grant permission to list S3
 buckets.")
 scenario.questioner.Ask("Press Enter when you're ready.")
 listBucketsRole, err := scenario.roleWrapper.CreateRole(ctx,
 scenario.helper.GetName(), *user.Arn)
 if err != nil {
  panic(err)
 }
 log.Printf("Created role %v.\n", *listBucketsRole.RoleName)
 listBucketsPolicy, err := scenario.policyWrapper.CreatePolicy(
  ctx, scenario.helper.GetName(), []string{"s3:ListAllMyBuckets"}, "arn:aws:s3:::*")
 if err != nil {
  panic(err)
 }
 log.Printf("Created policy %v.\n", *listBucketsPolicy.PolicyName)
 err = scenario.roleWrapper.AttachRolePolicy(ctx, *listBucketsPolicy.Arn,
 *listBucketsRole.RoleName)
 if err != nil {
  panic(err)
 }
 log.Printf("Attached policy %v to role %v.\n", *listBucketsPolicy.PolicyName,
  *listBucketsRole.RoleName)
```

```
 err = scenario.userWrapper.CreateUserPolicy(ctx, *user.UserName,
 scenario.helper.GetName(),
  []string{"sts:AssumeRole"}, *listBucketsRole.Arn)
 if err != nil {
  panic(err)
 }
 log.Printf("Created an inline policy for user %v that lets the user assume the
 role.\n",
  *user.UserName)
 log.Println("Let's give AWS a few seconds to propagate these new resources and
 connections...")
 scenario.helper.Pause(10)
 log.Println(strings.Repeat("-", 88))
 return listBucketsRole
}

// ListBucketsWithoutPermissions creates an Amazon S3 client from the user's access
 key
// credentials and tries to list buckets for the account. Because the user does not
 have
// permission to perform this action, the action fails.
func (scenario AssumeRoleScenario) ListBucketsWithoutPermissions(ctx
 context.Context, accessKey *types.AccessKey) *aws.Config {
 log.Println("Let's try to list buckets without permissions. This should return an
 AccessDenied error.")
 scenario.questioner.Ask("Press Enter when you're ready.")
 noPermsConfig, err := config.LoadDefaultConfig(ctx,
  config.WithCredentialsProvider(credentials.NewStaticCredentialsProvider(
   *accessKey.AccessKeyId, *accessKey.SecretAccessKey, ""),
  ))
 if err != nil {
  panic(err)
 }

 // Add test options if this is a test run. This is needed only for testing
 purposes.
 scenario.addTestOptions(&noPermsConfig)

 s3Client := s3.NewFromConfig(noPermsConfig)
 _, err = s3Client.ListBuckets(ctx, &s3.ListBucketsInput{})
 if err != nil {
  // The SDK for Go does not model the AccessDenied error, so check ErrorCode
 directly.
  var ae smithy.APIError
```

```
  if errors.As(err, &ae) {
   switch ae.ErrorCode() {
   case "AccessDenied":
    log.Println("Got AccessDenied error, which is the expected result because\n" +
     "the ListBuckets call was made without permissions.")
   default:
    log.Println("Expected AccessDenied, got something else.")
    panic(err)
   }
  }
 } else {
  log.Println("Expected AccessDenied error when calling ListBuckets without
 permissions,\n" +
   "but the call succeeded. Continuing the example anyway...")
 }
 log.Println(strings.Repeat("-", 88))
 return &noPermsConfig
}

// ListBucketsWithAssumedRole performs the following actions:
//
//  1. Creates an AWS Security Token Service (AWS STS) client from the config
 created from
//     the user's access key credentials.
//  2. Gets temporary credentials by assuming the role that grants permission to
 list the
//     buckets.
//  3. Creates an Amazon S3 client from the temporary credentials.
//  4. Lists buckets for the account. Because the temporary credentials are
 generated by
//     assuming the role that grants permission, the action succeeds.
func (scenario AssumeRoleScenario) ListBucketsWithAssumedRole(ctx context.Context,
 noPermsConfig *aws.Config, role *types.Role) {
 log.Println("Let's assume the role that grants permission to list buckets and try
 again.")
 scenario.questioner.Ask("Press Enter when you're ready.")
 stsClient := sts.NewFromConfig(*noPermsConfig)
 tempCredentials, err := stsClient.AssumeRole(ctx, &sts.AssumeRoleInput{
  RoleArn:         role.Arn,
  RoleSessionName: aws.String("AssumeRoleExampleSession"),
  DurationSeconds: aws.Int32(900),
 })
 if err != nil {
  log.Printf("Couldn't assume role %v.\n", *role.RoleName)
```

```
  panic(err)
 }
 log.Printf("Assumed role %v, got temporary credentials.\n", *role.RoleName)
 assumeRoleConfig, err := config.LoadDefaultConfig(ctx,
  config.WithCredentialsProvider(credentials.NewStaticCredentialsProvider(
   *tempCredentials.Credentials.AccessKeyId,
   *tempCredentials.Credentials.SecretAccessKey,
   *tempCredentials.Credentials.SessionToken),
  ),
 )
 if err != nil {
  panic(err)
 }

 // Add test options if this is a test run. This is needed only for testing
 purposes.
 scenario.addTestOptions(&assumeRoleConfig)

 s3Client := s3.NewFromConfig(assumeRoleConfig)
 result, err := s3Client.ListBuckets(ctx, &s3.ListBucketsInput{})
 if err != nil {
  log.Println("Couldn't list buckets with assumed role credentials.")
  panic(err)
 }
 log.Println("Successfully called ListBuckets with assumed role credentials, \n" +
  "here are some of them:")
 for i := 0; i < len(result.Buckets) && i < 5; i++ {
  log.Printf("\t%v\n", *result.Buckets[i].Name)
 }
 log.Println(strings.Repeat("-", 88))
}

// Cleanup deletes all resources created for the scenario.
func (scenario AssumeRoleScenario) Cleanup(ctx context.Context, user *types.User,
 role *types.Role) {
 if scenario.questioner.AskBool(
  "Do you want to delete the resources created for this example? (y/n)", "y",
 ) {
  policies, err := scenario.roleWrapper.ListAttachedRolePolicies(ctx,
 *role.RoleName)
  if err != nil {
   panic(err)
  }
  for _, policy := range policies {
```

```
  err = scenario.roleWrapper.DetachRolePolicy(ctx, *role.RoleName,
*policy.PolicyArn)
  if err != nil {
   panic(err)
  }
  err = scenario.policyWrapper.DeletePolicy(ctx, *policy.PolicyArn)
  if err != nil {
   panic(err)
  }
  log.Printf("Detached policy %v from role %v and deleted the policy.\n",
   *policy.PolicyName, *role.RoleName)
 }
 err = scenario.roleWrapper.DeleteRole(ctx, *role.RoleName)
 if err != nil {
  panic(err)
 }
 log.Printf("Deleted role %v.\n", *role.RoleName)

 userPols, err := scenario.userWrapper.ListUserPolicies(ctx, *user.UserName)
 if err != nil {
  panic(err)
 }
 for _, userPol := range userPols {
  err = scenario.userWrapper.DeleteUserPolicy(ctx, *user.UserName, userPol)
  if err != nil {
   panic(err)
  }
  log.Printf("Deleted policy %v from user %v.\n", userPol, *user.UserName)
 }
 keys, err := scenario.userWrapper.ListAccessKeys(ctx, *user.UserName)
 if err != nil {
  panic(err)
 }
 for _, key := range keys {
  err = scenario.userWrapper.DeleteAccessKey(ctx, *user.UserName, *key.AccessKeyId)
  if err != nil {
   panic(err)
  }
  log.Printf("Deleted access key %v from user %v.\n", *key.AccessKeyId,
*user.UserName)
 }
 err = scenario.userWrapper.DeleteUser(ctx, *user.UserName)
 if err != nil {
  panic(err)
```

```
  }
  log.Printf("Deleted user %v.\n", *user.UserName)
  log.Println(strings.Repeat("-", 88))
 }

}

// IScenarioHelper abstracts input and wait functions from a scenario so that they
// can be mocked for unit testing.
type IScenarioHelper interface {
 GetName() string
 Pause(secs int)
}

const rMax = 100000

type ScenarioHelper struct {
 Prefix string
 Random *rand.Rand
}

// GetName returns a unique name formed of a prefix and a random number.
func (helper *ScenarioHelper) GetName() string {
 return fmt.Sprintf("%v%v", helper.Prefix, helper.Random.Intn(rMax))
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 time.Sleep(time.Duration(secs) * time.Second)
}
```

アカウントアクションをラップする構造体を定義します。

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)
```

```
// AccountWrapper encapsulates AWS Identity and Access Management (IAM) account
 actions
// used in the examples.
// It contains an IAM service client that is used to perform account actions.
type AccountWrapper struct {
 IamClient *iam.Client
}



// GetAccountPasswordPolicy gets the account password policy for the current
 account.
// If no policy has been set, a NoSuchEntityException is error is returned.
func (wrapper AccountWrapper) GetAccountPasswordPolicy(ctx context.Context)
 (*types.PasswordPolicy, error) {
 var pwPolicy *types.PasswordPolicy
 result, err := wrapper.IamClient.GetAccountPasswordPolicy(ctx,
  &iam.GetAccountPasswordPolicyInput{})
 if err != nil {
  log.Printf("Couldn't get account password policy. Here's why: %v\n", err)
 } else {
  pwPolicy = result.PasswordPolicy
 }
 return pwPolicy, err
}



// ListSAMLProviders gets the SAML providers for the account.
func (wrapper AccountWrapper) ListSAMLProviders(ctx context.Context)
 ([]types.SAMLProviderListEntry, error) {
 var providers []types.SAMLProviderListEntry
 result, err := wrapper.IamClient.ListSAMLProviders(ctx,
 &iam.ListSAMLProvidersInput{})
 if err != nil {
  log.Printf("Couldn't list SAML providers. Here's why: %v\n", err)
 } else {
  providers = result.SAMLProviderList
 }
 return providers, err
}
```

ポリシーアクションをラップする構造体を定義します。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// PolicyWrapper encapsulates AWS Identity and Access Management (IAM) policy
 actions
// used in the examples.
// It contains an IAM service client that is used to perform policy actions.
type PolicyWrapper struct {
 IamClient *iam.Client
}



// ListPolicies gets up to maxPolicies policies.
func (wrapper PolicyWrapper) ListPolicies(ctx context.Context, maxPolicies int32)
 ([]types.Policy, error) {
 var policies []types.Policy
 result, err := wrapper.IamClient.ListPolicies(ctx, &iam.ListPoliciesInput{
  MaxItems: aws.Int32(maxPolicies),
 })
 if err != nil {
  log.Printf("Couldn't list policies. Here's why: %v\n", err)
 } else {
  policies = result.Policies
 }
 return policies, err
}



// PolicyDocument defines a policy document as a Go struct that can be serialized
```

```
// to JSON.
type PolicyDocument struct {
 Version   string
 Statement []PolicyStatement
}

// PolicyStatement defines a statement in a policy document.
type PolicyStatement struct {
 Effect    string
 Action    []string
 Principal map[string]string `json:",omitempty"`
 Resource  *string           `json:",omitempty"`
}

// CreatePolicy creates a policy that grants a list of actions to the specified
 resource.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper PolicyWrapper) CreatePolicy(ctx context.Context, policyName string,
 actions []string,
 resourceArn string) (*types.Policy, error) {
 var policy *types.Policy
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:   "Allow",
   Action:   actions,
   Resource: aws.String(resourceArn),
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document for %v. Here's why: %v\n",
 resourceArn, err)
  return nil, err
 }
 result, err := wrapper.IamClient.CreatePolicy(ctx, &iam.CreatePolicyInput{
  PolicyDocument: aws.String(string(policyBytes)),
  PolicyName:     aws.String(policyName),
 })
 if err != nil {
  log.Printf("Couldn't create policy %v. Here's why: %v\n", policyName, err)
 } else {
  policy = result.Policy
```

```
 }
 return policy, err
}



// GetPolicy gets data about a policy.
func (wrapper PolicyWrapper) GetPolicy(ctx context.Context, policyArn string)
 (*types.Policy, error) {
 var policy *types.Policy
 result, err := wrapper.IamClient.GetPolicy(ctx, &iam.GetPolicyInput{
  PolicyArn: aws.String(policyArn),
 })
 if err != nil {
  log.Printf("Couldn't get policy %v. Here's why: %v\n", policyArn, err)
 } else {
  policy = result.Policy
 }
 return policy, err
}



// DeletePolicy deletes a policy.
func (wrapper PolicyWrapper) DeletePolicy(ctx context.Context, policyArn string)
 error {
 _, err := wrapper.IamClient.DeletePolicy(ctx, &iam.DeletePolicyInput{
  PolicyArn: aws.String(policyArn),
 })
 if err != nil {
  log.Printf("Couldn't delete policy %v. Here's why: %v\n", policyArn, err)
 }
 return err
}
```

ロールアクションをラップする構造体を定義します。

```
import (
 "context"
 "encoding/json"
```

```
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// ListRoles gets up to maxRoles roles.
func (wrapper RoleWrapper) ListRoles(ctx context.Context, maxRoles int32)
 ([]types.Role, error) {
 var roles []types.Role
 result, err := wrapper.IamClient.ListRoles(ctx,
  &iam.ListRolesInput{MaxItems: aws.Int32(maxRoles)},
 )
 if err != nil {
  log.Printf("Couldn't list roles. Here's why: %v\n", err)
 } else {
  roles = result.Roles
 }
 return roles, err
}



// CreateRole creates a role that trusts a specified user. The trusted user can
 assume
// the role to acquire its permissions.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper RoleWrapper) CreateRole(ctx context.Context, roleName string,
 trustedUserArn string) (*types.Role, error) {
 var role *types.Role
 trustPolicy := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
```

```
    Effect:    "Allow",
    Principal: map[string]string{"AWS": trustedUserArn},
    Action:    []string{"sts:AssumeRole"},
   }},
 }
 policyBytes, err := json.Marshal(trustPolicy)
 if err != nil {
  log.Printf("Couldn't create trust policy for %v. Here's why: %v\n",
 trustedUserArn, err)
  return nil, err
 }
 result, err := wrapper.IamClient.CreateRole(ctx, &iam.CreateRoleInput{
  AssumeRolePolicyDocument: aws.String(string(policyBytes)),
  RoleName:                 aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't create role %v. Here's why: %v\n", roleName, err)
 } else {
  role = result.Role
 }
 return role, err
}



// GetRole gets data about a role.
func (wrapper RoleWrapper) GetRole(ctx context.Context, roleName string)
 (*types.Role, error) {
 var role *types.Role
 result, err := wrapper.IamClient.GetRole(ctx,
  &iam.GetRoleInput{RoleName: aws.String(roleName)})
 if err != nil {
  log.Printf("Couldn't get role %v. Here's why: %v\n", roleName, err)
 } else {
  role = result.Role
 }
 return role, err
}



// CreateServiceLinkedRole creates a service-linked role that is owned by the
 specified service.
```

```
func (wrapper RoleWrapper) CreateServiceLinkedRole(ctx context.Context, serviceName
 string, description string) (
 *types.Role, error) {
 var role *types.Role
 result, err := wrapper.IamClient.CreateServiceLinkedRole(ctx,
 &iam.CreateServiceLinkedRoleInput{
  AWSServiceName: aws.String(serviceName),
  Description:    aws.String(description),
 })
 if err != nil {
  log.Printf("Couldn't create service-linked role %v. Here's why: %v\n",
 serviceName, err)
 } else {
  role = result.Role
 }
 return role, err
}



// DeleteServiceLinkedRole deletes a service-linked role.
func (wrapper RoleWrapper) DeleteServiceLinkedRole(ctx context.Context, roleName
 string) error {
 _, err := wrapper.IamClient.DeleteServiceLinkedRole(ctx,
 &iam.DeleteServiceLinkedRoleInput{
  RoleName: aws.String(roleName)},
 )
 if err != nil {
  log.Printf("Couldn't delete service-linked role %v. Here's why: %v\n", roleName,
 err)
 }
 return err
}



// AttachRolePolicy attaches a policy to a role.
func (wrapper RoleWrapper) AttachRolePolicy(ctx context.Context, policyArn string,
 roleName string) error {
 _, err := wrapper.IamClient.AttachRolePolicy(ctx, &iam.AttachRolePolicyInput{
  PolicyArn: aws.String(policyArn),
  RoleName:  aws.String(roleName),
 })
 if err != nil {
```

```
  log.Printf("Couldn't attach policy %v to role %v. Here's why: %v\n", policyArn,
 roleName, err)
 }
 return err
}



// ListAttachedRolePolicies lists the policies that are attached to the specified
 role.
func (wrapper RoleWrapper) ListAttachedRolePolicies(ctx context.Context, roleName
 string) ([]types.AttachedPolicy, error) {
 var policies []types.AttachedPolicy
 result, err := wrapper.IamClient.ListAttachedRolePolicies(ctx,
 &iam.ListAttachedRolePoliciesInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't list attached policies for role %v. Here's why: %v\n",
 roleName, err)
 } else {
  policies = result.AttachedPolicies
 }
 return policies, err
}



// DetachRolePolicy detaches a policy from a role.
func (wrapper RoleWrapper) DetachRolePolicy(ctx context.Context, roleName string,
 policyArn string) error {
 _, err := wrapper.IamClient.DetachRolePolicy(ctx, &iam.DetachRolePolicyInput{
  PolicyArn: aws.String(policyArn),
  RoleName:  aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't detach policy from role %v. Here's why: %v\n", roleName, err)
 }
 return err
}



// ListRolePolicies lists the inline policies for a role.
```

```
func (wrapper RoleWrapper) ListRolePolicies(ctx context.Context, roleName string)
 ([]string, error) {
 var policies []string
 result, err := wrapper.IamClient.ListRolePolicies(ctx, &iam.ListRolePoliciesInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't list policies for role %v. Here's why: %v\n", roleName, err)
 } else {
  policies = result.PolicyNames
 }
 return policies, err
}



// DeleteRole deletes a role. All attached policies must be detached before a
// role can be deleted.
func (wrapper RoleWrapper) DeleteRole(ctx context.Context, roleName string) error {
 _, err := wrapper.IamClient.DeleteRole(ctx, &iam.DeleteRoleInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't delete role %v. Here's why: %v\n", roleName, err)
 }
 return err
}
```

ユーザーアクションをラップする構造体を定義します。

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
```

```
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// ListUsers gets up to maxUsers number of users.
func (wrapper UserWrapper) ListUsers(ctx context.Context, maxUsers int32)
 ([]types.User, error) {
 var users []types.User
 result, err := wrapper.IamClient.ListUsers(ctx, &iam.ListUsersInput{
  MaxItems: aws.Int32(maxUsers),
 })
 if err != nil {
  log.Printf("Couldn't list users. Here's why: %v\n", err)
 } else {
  users = result.Users
 }
 return users, err
}



// GetUser gets data about a user.
func (wrapper UserWrapper) GetUser(ctx context.Context, userName string)
 (*types.User, error) {
 var user *types.User
 result, err := wrapper.IamClient.GetUser(ctx, &iam.GetUserInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  var apiError smithy.APIError
  if errors.As(err, &apiError) {
   switch apiError.(type) {
   case *types.NoSuchEntityException:
    log.Printf("User %v does not exist.\n", userName)
    err = nil
   default:
    log.Printf("Couldn't get user %v. Here's why: %v\n", userName, err)
```

```
   }
  }
 } else {
  user = result.User
 }
 return user, err
}



// CreateUser creates a new user with the specified name.
func (wrapper UserWrapper) CreateUser(ctx context.Context, userName string)
 (*types.User, error) {
 var user *types.User
 result, err := wrapper.IamClient.CreateUser(ctx, &iam.CreateUserInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
 } else {
  user = result.User
 }
 return user, err
}



// CreateUserPolicy adds an inline policy to a user. This example creates a policy
 that
// grants a list of actions on a specified role.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper UserWrapper) CreateUserPolicy(ctx context.Context, userName string,
 policyName string, actions []string,
 roleArn string) error {
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:   "Allow",
   Action:   actions,
   Resource: aws.String(roleArn),
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
```

```
 if err != nil {
  log.Printf("Couldn't create policy document for %v. Here's why: %v\n", roleArn,
 err)
  return err
 }
 _, err = wrapper.IamClient.PutUserPolicy(ctx, &iam.PutUserPolicyInput{
  PolicyDocument: aws.String(string(policyBytes)),
  PolicyName:     aws.String(policyName),
  UserName:       aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't create policy for user %v. Here's why: %v\n", userName, err)
 }
 return err
}



// ListUserPolicies lists the inline policies for the specified user.
func (wrapper UserWrapper) ListUserPolicies(ctx context.Context, userName string)
 ([]string, error) {
 var policies []string
 result, err := wrapper.IamClient.ListUserPolicies(ctx, &iam.ListUserPoliciesInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't list policies for user %v. Here's why: %v\n", userName, err)
 } else {
  policies = result.PolicyNames
 }
 return policies, err
}



// DeleteUserPolicy deletes an inline policy from a user.
func (wrapper UserWrapper) DeleteUserPolicy(ctx context.Context, userName string,
 policyName string) error {
 _, err := wrapper.IamClient.DeleteUserPolicy(ctx, &iam.DeleteUserPolicyInput{
  PolicyName: aws.String(policyName),
  UserName:   aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't delete policy from user %v. Here's why: %v\n", userName, err)
```

```
 }
 return err
}



// DeleteUser deletes a user.
func (wrapper UserWrapper) DeleteUser(ctx context.Context, userName string) error {
 _, err := wrapper.IamClient.DeleteUser(ctx, &iam.DeleteUserInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't delete user %v. Here's why: %v\n", userName, err)
 }
 return err
}



// CreateAccessKeyPair creates an access key for a user. The returned access key
 contains
// the ID and secret credentials needed to use the key.
func (wrapper UserWrapper) CreateAccessKeyPair(ctx context.Context, userName string)
 (*types.AccessKey, error) {
 var key *types.AccessKey
 result, err := wrapper.IamClient.CreateAccessKey(ctx, &iam.CreateAccessKeyInput{
  UserName: aws.String(userName)})
 if err != nil {
  log.Printf("Couldn't create access key pair for user %v. Here's why: %v\n",
 userName, err)
 } else {
  key = result.AccessKey
 }
 return key, err
}



// DeleteAccessKey deletes an access key from a user.
func (wrapper UserWrapper) DeleteAccessKey(ctx context.Context, userName string,
 keyId string) error {
 _, err := wrapper.IamClient.DeleteAccessKey(ctx, &iam.DeleteAccessKeyInput{
  AccessKeyId: aws.String(keyId),
  UserName:    aws.String(userName),
```

```
 })
 if err != nil {
  log.Printf("Couldn't delete access key %v. Here's why: %v\n", keyId, err)
 }
 return err
}



// ListAccessKeys lists the access keys for the specified user.
func (wrapper UserWrapper) ListAccessKeys(ctx context.Context, userName string)
 ([]types.AccessKeyMetadata, error) {
 var keys []types.AccessKeyMetadata
 result, err := wrapper.IamClient.ListAccessKeys(ctx, &iam.ListAccessKeysInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't list access keys for user %v. Here's why: %v\n", userName,
 err)
 } else {
  keys = result.AccessKeyMetadata
 }
 return keys, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - AttachRolePolicy
  - CreateAccessKey
  - CreatePolicy
  - CreateRole
  - CreateUser
  - DeleteAccessKey
  - DeletePolicy
  - DeleteRole
  - DeleteUser
  - DeleteUserPolicy

- DetachRolePolicy
- PutUserPolicy

アクション

`AttachRolePolicy`

次のコード例は、`AttachRolePolicy` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// AttachRolePolicy attaches a policy to a role.
func (wrapper RoleWrapper) AttachRolePolicy(ctx context.Context, policyArn string,
 roleName string) error {
 _, err := wrapper.IamClient.AttachRolePolicy(ctx, &iam.AttachRolePolicyInput{
```

```
  PolicyArn: aws.String(policyArn),
  RoleName:  aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't attach policy %v to role %v. Here's why: %v\n", policyArn,
 roleName, err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「AttachRolePolicy」を参照してください。

`CreateAccessKey`

次のコード例は、`CreateAccessKey` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
```

```
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// CreateAccessKeyPair creates an access key for a user. The returned access key
 contains
// the ID and secret credentials needed to use the key.
func (wrapper UserWrapper) CreateAccessKeyPair(ctx context.Context, userName string)
 (*types.AccessKey, error) {
 var key *types.AccessKey
 result, err := wrapper.IamClient.CreateAccessKey(ctx, &iam.CreateAccessKeyInput{
  UserName: aws.String(userName)})
 if err != nil {
  log.Printf("Couldn't create access key pair for user %v. Here's why: %v\n",
 userName, err)
 } else {
  key = result.AccessKey
 }
 return key, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateAccessKey」を参照してください。

`CreatePolicy`

次のコード例は、`CreatePolicy` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// PolicyWrapper encapsulates AWS Identity and Access Management (IAM) policy
 actions
// used in the examples.
// It contains an IAM service client that is used to perform policy actions.
type PolicyWrapper struct {
 IamClient *iam.Client
}



// PolicyDocument defines a policy document as a Go struct that can be serialized
// to JSON.
type PolicyDocument struct {
 Version   string
 Statement []PolicyStatement
}

// PolicyStatement defines a statement in a policy document.
type PolicyStatement struct {
 Effect    string
 Action    []string
 Principal map[string]string `json:",omitempty"`
 Resource  *string           `json:",omitempty"`
}

// CreatePolicy creates a policy that grants a list of actions to the specified
 resource.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper PolicyWrapper) CreatePolicy(ctx context.Context, policyName string,
 actions []string,
 resourceArn string) (*types.Policy, error) {
```

```
 var policy *types.Policy
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:   "Allow",
   Action:   actions,
   Resource: aws.String(resourceArn),
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document for %v. Here's why: %v\n",
 resourceArn, err)
  return nil, err
 }
 result, err := wrapper.IamClient.CreatePolicy(ctx, &iam.CreatePolicyInput{
  PolicyDocument: aws.String(string(policyBytes)),
  PolicyName:     aws.String(policyName),
 })
 if err != nil {
  log.Printf("Couldn't create policy %v. Here's why: %v\n", policyName, err)
 } else {
  policy = result.Policy
 }
 return policy, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreatePolicy」を参照してください。

`CreateRole`

次のコード例は、`CreateRole` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// CreateRole creates a role that trusts a specified user. The trusted user can
 assume
// the role to acquire its permissions.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper RoleWrapper) CreateRole(ctx context.Context, roleName string,
 trustedUserArn string) (*types.Role, error) {
 var role *types.Role
 trustPolicy := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:    "Allow",
   Principal: map[string]string{"AWS": trustedUserArn},
   Action:    []string{"sts:AssumeRole"},
```

```
  }},
 }
 policyBytes, err := json.Marshal(trustPolicy)
 if err != nil {
  log.Printf("Couldn't create trust policy for %v. Here's why: %v\n",
 trustedUserArn, err)
  return nil, err
 }
 result, err := wrapper.IamClient.CreateRole(ctx, &iam.CreateRoleInput{
  AssumeRolePolicyDocument: aws.String(string(policyBytes)),
  RoleName:                 aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't create role %v. Here's why: %v\n", roleName, err)
 } else {
  role = result.Role
 }
 return role, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateRole」を参照してください。

`CreateServiceLinkedRole`

次のコード例は、`CreateServiceLinkedRole` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
```

```
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// CreateServiceLinkedRole creates a service-linked role that is owned by the
 specified service.
func (wrapper RoleWrapper) CreateServiceLinkedRole(ctx context.Context, serviceName
 string, description string) (
 *types.Role, error) {
 var role *types.Role
 result, err := wrapper.IamClient.CreateServiceLinkedRole(ctx,
 &iam.CreateServiceLinkedRoleInput{
  AWSServiceName: aws.String(serviceName),
  Description:    aws.String(description),
 })
 if err != nil {
  log.Printf("Couldn't create service-linked role %v. Here's why: %v\n",
 serviceName, err)
 } else {
  role = result.Role
 }
 return role, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「CreateServiceLinkedRole」を参照してください。

CreateUser

次のコード例は、CreateUser を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// CreateUser creates a new user with the specified name.
func (wrapper UserWrapper) CreateUser(ctx context.Context, userName string)
 (*types.User, error) {
 var user *types.User
 result, err := wrapper.IamClient.CreateUser(ctx, &iam.CreateUserInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
 } else {
```

```
  user = result.User
 }
 return user, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateUser」を参照してください。

`DeleteAccessKey`

次のコード例は、`DeleteAccessKey` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}
```

```
// DeleteAccessKey deletes an access key from a user.
func (wrapper UserWrapper) DeleteAccessKey(ctx context.Context, userName string,
 keyId string) error {
 _, err := wrapper.IamClient.DeleteAccessKey(ctx, &iam.DeleteAccessKeyInput{
  AccessKeyId: aws.String(keyId),
  UserName:    aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't delete access key %v. Here's why: %v\n", keyId, err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteAccessKey」を参照してください。

`DeletePolicy`

次のコード例は、`DeletePolicy` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
```

```
)

// PolicyWrapper encapsulates AWS Identity and Access Management (IAM) policy
 actions
// used in the examples.
// It contains an IAM service client that is used to perform policy actions.
type PolicyWrapper struct {
 IamClient *iam.Client
}



// DeletePolicy deletes a policy.
func (wrapper PolicyWrapper) DeletePolicy(ctx context.Context, policyArn string)
 error {
 _, err := wrapper.IamClient.DeletePolicy(ctx, &iam.DeletePolicyInput{
  PolicyArn: aws.String(policyArn),
 })
 if err != nil {
  log.Printf("Couldn't delete policy %v. Here's why: %v\n", policyArn, err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeletePolicy」を参照してください。

`DeleteRole`

次のコード例は、`DeleteRole` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// DeleteRole deletes a role. All attached policies must be detached before a
// role can be deleted.
func (wrapper RoleWrapper) DeleteRole(ctx context.Context, roleName string) error {
 _, err := wrapper.IamClient.DeleteRole(ctx, &iam.DeleteRoleInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't delete role %v. Here's why: %v\n", roleName, err)
 }
 return err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「DeleteRole」を参照してください。

`DeleteServiceLinkedRole`

次のコード例は、`DeleteServiceLinkedRole` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// DeleteServiceLinkedRole deletes a service-linked role.
func (wrapper RoleWrapper) DeleteServiceLinkedRole(ctx context.Context, roleName
 string) error {
 _, err := wrapper.IamClient.DeleteServiceLinkedRole(ctx,
 &iam.DeleteServiceLinkedRoleInput{
  RoleName: aws.String(roleName)},
 )
 if err != nil {
  log.Printf("Couldn't delete service-linked role %v. Here's why: %v\n", roleName,
 err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteServiceLinkedRole」を参照してください。

`DeleteUser`

次のコード例は、`DeleteUser` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// DeleteUser deletes a user.
func (wrapper UserWrapper) DeleteUser(ctx context.Context, userName string) error {
 _, err := wrapper.IamClient.DeleteUser(ctx, &iam.DeleteUserInput{
```

```
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't delete user %v. Here's why: %v\n", userName, err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteUser」を参照してください。

`DeleteUserPolicy`

次のコード例は、`DeleteUserPolicy` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
```

```
 IamClient *iam.Client
}



// DeleteUserPolicy deletes an inline policy from a user.
func (wrapper UserWrapper) DeleteUserPolicy(ctx context.Context, userName string,
 policyName string) error {
 _, err := wrapper.IamClient.DeleteUserPolicy(ctx, &iam.DeleteUserPolicyInput{
  PolicyName: aws.String(policyName),
  UserName:   aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't delete policy from user %v. Here's why: %v\n", userName, err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteUserPolicy」を参照してください。

`DetachRolePolicy`

次のコード例は、`DetachRolePolicy` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// DetachRolePolicy detaches a policy from a role.
func (wrapper RoleWrapper) DetachRolePolicy(ctx context.Context, roleName string,
 policyArn string) error {
 _, err := wrapper.IamClient.DetachRolePolicy(ctx, &iam.DetachRolePolicyInput{
  PolicyArn: aws.String(policyArn),
  RoleName:  aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't detach policy from role %v. Here's why: %v\n", roleName, err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DetachRolePolicy」を参照してください。

GetAccountPasswordPolicy

次のコード例は、GetAccountPasswordPolicy を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// AccountWrapper encapsulates AWS Identity and Access Management (IAM) account
 actions
// used in the examples.
// It contains an IAM service client that is used to perform account actions.
type AccountWrapper struct {
 IamClient *iam.Client
}



// GetAccountPasswordPolicy gets the account password policy for the current
 account.
// If no policy has been set, a NoSuchEntityException is error is returned.
func (wrapper AccountWrapper) GetAccountPasswordPolicy(ctx context.Context)
 (*types.PasswordPolicy, error) {
 var pwPolicy *types.PasswordPolicy
 result, err := wrapper.IamClient.GetAccountPasswordPolicy(ctx,
  &iam.GetAccountPasswordPolicyInput{})
 if err != nil {
  log.Printf("Couldn't get account password policy. Here's why: %v\n", err)
 } else {
  pwPolicy = result.PasswordPolicy
 }
 return pwPolicy, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「GetAccountPasswordPolicy」を参照してください。

GetPolicy

次のコード例は、GetPolicy を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// PolicyWrapper encapsulates AWS Identity and Access Management (IAM) policy
 actions
// used in the examples.
// It contains an IAM service client that is used to perform policy actions.
type PolicyWrapper struct {
 IamClient *iam.Client
}



// GetPolicy gets data about a policy.
```

```
func (wrapper PolicyWrapper) GetPolicy(ctx context.Context, policyArn string)
 (*types.Policy, error) {
 var policy *types.Policy
 result, err := wrapper.IamClient.GetPolicy(ctx, &iam.GetPolicyInput{
  PolicyArn: aws.String(policyArn),
 })
 if err != nil {
  log.Printf("Couldn't get policy %v. Here's why: %v\n", policyArn, err)
 } else {
  policy = result.Policy
 }
 return policy, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「GetPolicy」を参照してください。

`GetRole`

次のコード例は、`GetRole` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)
```

```
// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// GetRole gets data about a role.
func (wrapper RoleWrapper) GetRole(ctx context.Context, roleName string)
 (*types.Role, error) {
 var role *types.Role
 result, err := wrapper.IamClient.GetRole(ctx,
  &iam.GetRoleInput{RoleName: aws.String(roleName)})
 if err != nil {
  log.Printf("Couldn't get role %v. Here's why: %v\n", roleName, err)
 } else {
  role = result.Role
 }
 return role, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「GetRole」を参照してください。

`GetUser`

次のコード例は、`GetUser` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// GetUser gets data about a user.
func (wrapper UserWrapper) GetUser(ctx context.Context, userName string)
 (*types.User, error) {
 var user *types.User
 result, err := wrapper.IamClient.GetUser(ctx, &iam.GetUserInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  var apiError smithy.APIError
  if errors.As(err, &apiError) {
   switch apiError.(type) {
   case *types.NoSuchEntityException:
    log.Printf("User %v does not exist.\n", userName)
    err = nil
   default:
    log.Printf("Couldn't get user %v. Here's why: %v\n", userName, err)
   }
  }
 } else {
  user = result.User
 }
 return user, err
```

```
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「GetUser」を参照してください。

`ListAccessKeys`

次のコード例は、`ListAccessKeys` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// ListAccessKeys lists the access keys for the specified user.
```

```
func (wrapper UserWrapper) ListAccessKeys(ctx context.Context, userName string)
 ([]types.AccessKeyMetadata, error) {
 var keys []types.AccessKeyMetadata
 result, err := wrapper.IamClient.ListAccessKeys(ctx, &iam.ListAccessKeysInput{
  UserName: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't list access keys for user %v. Here's why: %v\n", userName,
 err)
 } else {
  keys = result.AccessKeyMetadata
 }
 return keys, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListAccessKeys」を参照してください。

`ListAttachedRolePolicies`

次のコード例は、`ListAttachedRolePolicies` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
```

```
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// ListAttachedRolePolicies lists the policies that are attached to the specified
 role.
func (wrapper RoleWrapper) ListAttachedRolePolicies(ctx context.Context, roleName
 string) ([]types.AttachedPolicy, error) {
 var policies []types.AttachedPolicy
 result, err := wrapper.IamClient.ListAttachedRolePolicies(ctx,
 &iam.ListAttachedRolePoliciesInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't list attached policies for role %v. Here's why: %v\n",
 roleName, err)
 } else {
  policies = result.AttachedPolicies
 }
 return policies, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ListAttachedRolePolicies」を参照してください。

ListGroups

次のコード例は、ListGroups を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// GroupWrapper encapsulates AWS Identity and Access Management (IAM) group actions
// used in the examples.
// It contains an IAM service client that is used to perform group actions.
type GroupWrapper struct {
 IamClient *iam.Client
}



// ListGroups lists up to maxGroups number of groups.
func (wrapper GroupWrapper) ListGroups(ctx context.Context, maxGroups int32)
 ([]types.Group, error) {
 var groups []types.Group
 result, err := wrapper.IamClient.ListGroups(ctx, &iam.ListGroupsInput{
  MaxItems: aws.Int32(maxGroups),
 })
 if err != nil {
  log.Printf("Couldn't list groups. Here's why: %v\n", err)
 } else {
  groups = result.Groups
 }
 return groups, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ListGroup」を参照してください。

`ListPolicies`

次のコード例は、`ListPolicies` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// PolicyWrapper encapsulates AWS Identity and Access Management (IAM) policy
 actions
// used in the examples.
// It contains an IAM service client that is used to perform policy actions.
type PolicyWrapper struct {
 IamClient *iam.Client
}



// ListPolicies gets up to maxPolicies policies.
func (wrapper PolicyWrapper) ListPolicies(ctx context.Context, maxPolicies int32)
 ([]types.Policy, error) {
```

```
 var policies []types.Policy
 result, err := wrapper.IamClient.ListPolicies(ctx, &iam.ListPoliciesInput{
  MaxItems: aws.Int32(maxPolicies),
 })
 if err != nil {
  log.Printf("Couldn't list policies. Here's why: %v\n", err)
 } else {
  policies = result.Policies
 }
 return policies, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListPolicies」を参照してください。

`ListRolePolicies`

次のコード例は、`ListRolePolicies` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
```

```
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// ListRolePolicies lists the inline policies for a role.
func (wrapper RoleWrapper) ListRolePolicies(ctx context.Context, roleName string)
 ([]string, error) {
 var policies []string
 result, err := wrapper.IamClient.ListRolePolicies(ctx, &iam.ListRolePoliciesInput{
  RoleName: aws.String(roleName),
 })
 if err != nil {
  log.Printf("Couldn't list policies for role %v. Here's why: %v\n", roleName, err)
 } else {
  policies = result.PolicyNames
 }
 return policies, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ListRolePolicies」を参照してください。

`ListRoles`

次のコード例は、`ListRoles` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// RoleWrapper encapsulates AWS Identity and Access Management (IAM) role actions
// used in the examples.
// It contains an IAM service client that is used to perform role actions.
type RoleWrapper struct {
 IamClient *iam.Client
}



// ListRoles gets up to maxRoles roles.
func (wrapper RoleWrapper) ListRoles(ctx context.Context, maxRoles int32)
 ([]types.Role, error) {
 var roles []types.Role
 result, err := wrapper.IamClient.ListRoles(ctx,
  &iam.ListRolesInput{MaxItems: aws.Int32(maxRoles)},
 )
 if err != nil {
  log.Printf("Couldn't list roles. Here's why: %v\n", err)
 } else {
  roles = result.Roles
 }
 return roles, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ListRoles」を参照してください。

ListSAMLProviders

次のコード例は、ListSAMLProviders を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
)

// AccountWrapper encapsulates AWS Identity and Access Management (IAM) account
 actions
// used in the examples.
// It contains an IAM service client that is used to perform account actions.
type AccountWrapper struct {
 IamClient *iam.Client
}



// ListSAMLProviders gets the SAML providers for the account.
func (wrapper AccountWrapper) ListSAMLProviders(ctx context.Context)
 ([]types.SAMLProviderListEntry, error) {
 var providers []types.SAMLProviderListEntry
 result, err := wrapper.IamClient.ListSAMLProviders(ctx,
 &iam.ListSAMLProvidersInput{})
 if err != nil {
  log.Printf("Couldn't list SAML providers. Here's why: %v\n", err)
 } else {
  providers = result.SAMLProviderList
 }
 return providers, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ListSAMLProviders」を参照してください。

`ListUserPolicies`

次のコード例は、`ListUserPolicies` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// ListUserPolicies lists the inline policies for the specified user.
func (wrapper UserWrapper) ListUserPolicies(ctx context.Context, userName string)
 ([]string, error) {
 var policies []string
 result, err := wrapper.IamClient.ListUserPolicies(ctx, &iam.ListUserPoliciesInput{
  UserName: aws.String(userName),
```

```
 })
 if err != nil {
  log.Printf("Couldn't list policies for user %v. Here's why: %v\n", userName, err)
 } else {
  policies = result.PolicyNames
 }
 return policies, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ListUserPolicies」を参照してください。

`ListUsers`

次のコード例は、`ListUsers` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
```

```
type UserWrapper struct {
 IamClient *iam.Client
}



// ListUsers gets up to maxUsers number of users.
func (wrapper UserWrapper) ListUsers(ctx context.Context, maxUsers int32)
 ([]types.User, error) {
 var users []types.User
 result, err := wrapper.IamClient.ListUsers(ctx, &iam.ListUsersInput{
  MaxItems: aws.Int32(maxUsers),
 })
 if err != nil {
  log.Printf("Couldn't list users. Here's why: %v\n", err)
 } else {
  users = result.Users
 }
 return users, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListUsers」を参照してください。

`PutUserPolicy`

次のコード例は、`PutUserPolicy` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
```

```
 "encoding/json"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/smithy-go"
)

// UserWrapper encapsulates user actions used in the examples.
// It contains an IAM service client that is used to perform user actions.
type UserWrapper struct {
 IamClient *iam.Client
}



// CreateUserPolicy adds an inline policy to a user. This example creates a policy
 that
// grants a list of actions on a specified role.
// PolicyDocument shows how to work with a policy document as a data structure and
// serialize it to JSON by using Go's JSON marshaler.
func (wrapper UserWrapper) CreateUserPolicy(ctx context.Context, userName string,
 policyName string, actions []string,
 roleArn string) error {
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:   "Allow",
   Action:   actions,
   Resource: aws.String(roleArn),
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document for %v. Here's why: %v\n", roleArn,
 err)
  return err
 }
 _, err = wrapper.IamClient.PutUserPolicy(ctx, &iam.PutUserPolicyInput{
  PolicyDocument: aws.String(string(policyBytes)),
  PolicyName:     aws.String(policyName),
  UserName:       aws.String(userName),
```

```
 })
 if err != nil {
  log.Printf("Couldn't create policy for user %v. Here's why: %v\n", userName, err)
 }
 return err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「PutUserPolicy」を参照してください。

SDK for Go V2 を使用した Kinesis の例

次のコード例は、Kinesis で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- サーバーレスサンプル

サーバーレスサンプル

Kinesis トリガーから Lambda 関数を呼び出す

次のコード例では、Kinesis ストリームからレコードを受信することによってトリガーされるイベントを受け取る、Lambda 関数の実装方法を示しています。この関数は Kinesis ペイロードを取得し、それを Base64 からデコードして、そのレコードの内容をログ記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda での Kinesis イベントの消費。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "log"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, kinesisEvent events.KinesisEvent) error {
 if len(kinesisEvent.Records) == 0 {
  log.Printf("empty Kinesis event received")
  return nil
 }

 for _, record := range kinesisEvent.Records {
  log.Printf("processed Kinesis event with EventId: %v", record.EventID)
  recordDataBytes := record.Kinesis.Data
  recordDataText := string(recordDataBytes)
  log.Printf("record data: %v", recordDataText)
  // TODO: Do interesting work based on the new data
 }
 log.Printf("successfully processed %v records", len(kinesisEvent.Records))
 return nil
}

func main() {
 lambda.Start(handler)
}
```

Kinesis トリガーを使用した Lambda 関数でのバッチアイテム失敗のレポート

以下のコード例では、Kinesis ストリームからイベントを受け取る Lambda 関数のための、部分的なバッチレスポンスの実装方法を示しています。この関数は、レスポンスとしてバッチアイテムの失敗を報告し、対象のメッセージを後で再試行するよう Lambda に伝えます。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda での Kinesis バッチアイテム失敗のレポート。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, kinesisEvent events.KinesisEvent)
 (map[string]interface{}, error) {
 batchItemFailures := []map[string]interface{}{}

 for _, record := range kinesisEvent.Records {
  curRecordSequenceNumber := ""

  // Process your record
  if /* Your record processing condition here */ {
   curRecordSequenceNumber = record.Kinesis.SequenceNumber
  }

  // Add a condition to check if the record processing failed
  if curRecordSequenceNumber != "" {
   batchItemFailures = append(batchItemFailures, map[string]interface{}
{"itemIdentifier": curRecordSequenceNumber})
  }
 }

 kinesisBatchResponse := map[string]interface{}{
  "batchItemFailures": batchItemFailures,
 }
```

```
 return kinesisBatchResponse, nil
}

func main() {
 lambda.Start(handler)
}
```

SDK for Go V2 を使用した Lambda の例

次のコード例は、Lambda で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

基本 は、重要なオペレーションをサービス内で実行する方法を示すコード例です。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

シナリオは、1 つのサービス内から、または他の AWS のサービスと組み合わせて複数の関数を呼び出し、特定のタスクを実行する方法を示すコード例です。

AWS コミュニティへの貢献は、複数のチームが作成し、維持している例です AWS。フィードバックを提供するには、リンクされたリポジトリで提供されているメカニズムを使用します。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- はじめに
- 基本
- アクション
- シナリオ
- サーバーレスサンプル
- AWS コミュニティへの貢献

はじめに

Hello Lambda

次のコード例は、Lambda の使用を開始する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
)

// main uses the AWS SDK for Go (v2) to create an AWS Lambda client and list up to
 10
// functions in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 lambdaClient := lambda.NewFromConfig(sdkConfig)
```

```
 maxItems := 10
 fmt.Printf("Let's list up to %v functions for your account.\n", maxItems)
 result, err := lambdaClient.ListFunctions(ctx, &lambda.ListFunctionsInput{
  MaxItems: aws.Int32(int32(maxItems)),
 })
 if err != nil {
  fmt.Printf("Couldn't list functions for your account. Here's why: %v\n", err)
  return
 }
 if len(result.Functions) == 0 {
  fmt.Println("You don't have any functions!")
 } else {
  for _, function := range result.Functions {
   fmt.Printf("\t%v\n", *function.FunctionName)
  }
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListFunctions」を参照してください。

基本

基本を学ぶ

次のコード例は、以下の操作方法を示しています。

- IAM ロールと Lambda 関数を作成し、ハンドラーコードをアップロードします。
- 1 つのパラメータで関数を呼び出して、結果を取得します。
- 関数コードを更新し、環境変数で設定します。
- 新しいパラメータで関数を呼び出して、結果を取得します。返された実行ログを表示します。
- アカウントの関数を一覧表示し、リソースをクリーンアップします。

詳細については、「コンソールで Lambda 関数を作成する」を参照してください。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

Lambda 関数の開始方法を示すインタラクティブなシナリオを作成します。

```
import (
 "archive/zip"
 "bytes"
 "context"
 "encoding/base64"
 "encoding/json"
 "errors"
 "fmt"
 "log"
 "os"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/iam"
 iamtypes "github.com/aws/aws-sdk-go-v2/service/iam/types"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/lambda/actions"
)

// GetStartedFunctionsScenario shows you how to use AWS Lambda to perform the
 following
// actions:
//
//  1. Create an AWS Identity and Access Management (IAM) role and Lambda function,
 then upload handler code.
//  2. Invoke the function with a single parameter and get results.
//  3. Update the function code and configure with an environment variable.
//  4. Invoke the function with new parameters and get results. Display the returned
 execution log.
//  5. List the functions for your account, then clean up resources.
```

```
type GetStartedFunctionsScenario struct {
 sdkConfig       aws.Config
 functionWrapper actions.FunctionWrapper
 questioner      demotools.IQuestioner
 helper          IScenarioHelper
 isTestRun       bool
}

// NewGetStartedFunctionsScenario constructs a GetStartedFunctionsScenario instance
 from a configuration.
// It uses the specified config to get a Lambda client and create wrappers for the
 actions
// used in the scenario.
func NewGetStartedFunctionsScenario(sdkConfig aws.Config, questioner
 demotools.IQuestioner,
 helper IScenarioHelper) GetStartedFunctionsScenario {
 lambdaClient := lambda.NewFromConfig(sdkConfig)
 return GetStartedFunctionsScenario{
  sdkConfig:       sdkConfig,
  functionWrapper: actions.FunctionWrapper{LambdaClient: lambdaClient},
  questioner:      questioner,
  helper:          helper,
 }
}

// Run runs the interactive scenario.
func (scenario GetStartedFunctionsScenario) Run(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong with the demo.\n")
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the AWS Lambda get started with functions demo.")
 log.Println(strings.Repeat("-", 88))

 role := scenario.GetOrCreateRole(ctx)
 funcName := scenario.CreateFunction(ctx, role)
 scenario.InvokeIncrement(ctx, funcName)
 scenario.UpdateFunction(ctx, funcName)
 scenario.InvokeCalculator(ctx, funcName)
 scenario.ListFunctions(ctx)
 scenario.Cleanup(ctx, role, funcName)
```

```
 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}

// GetOrCreateRole checks whether the specified role exists and returns it if it
 does.
// Otherwise, a role is created that specifies Lambda as a trusted principal.
// The AWSLambdaBasicExecutionRole managed policy is attached to the role and the
 role
// is returned.
func (scenario GetStartedFunctionsScenario) GetOrCreateRole(ctx context.Context)
 *iamtypes.Role {
 var role *iamtypes.Role
 iamClient := iam.NewFromConfig(scenario.sdkConfig)
 log.Println("First, we need an IAM role that Lambda can assume.")
 roleName := scenario.questioner.Ask("Enter a name for the role:",
 demotools.NotEmpty{})
 getOutput, err := iamClient.GetRole(ctx, &iam.GetRoleInput{
  RoleName: aws.String(roleName)})
 if err != nil {
  var noSuch *iamtypes.NoSuchEntityException
  if errors.As(err, &noSuch) {
   log.Printf("Role %v doesn't exist. Creating it....\n", roleName)
  } else {
   log.Panicf("Couldn't check whether role %v exists. Here's why: %v\n",
    roleName, err)
  }
 } else {
  role = getOutput.Role
  log.Printf("Found role %v.\n", *role.RoleName)
 }
 if role == nil {
  trustPolicy := PolicyDocument{
   Version: "2012-10-17",
   Statement: []PolicyStatement{{
    Effect:    "Allow",
    Principal: map[string]string{"Service": "lambda.amazonaws.com"},
    Action:    []string{"sts:AssumeRole"},
   }},
  }
  policyArn := "arn:aws:iam::aws:policy/service-role/AWSLambdaBasicExecutionRole"
  createOutput, err := iamClient.CreateRole(ctx, &iam.CreateRoleInput{
```

```
    AssumeRolePolicyDocument: aws.String(trustPolicy.String()),
    RoleName:                 aws.String(roleName),
   })
   if err != nil {
    log.Panicf("Couldn't create role %v. Here's why: %v\n", roleName, err)
   }
   role = createOutput.Role
   _, err = iamClient.AttachRolePolicy(ctx, &iam.AttachRolePolicyInput{
    PolicyArn: aws.String(policyArn),
    RoleName:  aws.String(roleName),
   })
   if err != nil {
    log.Panicf("Couldn't attach a policy to role %v. Here's why: %v\n", roleName,
  err)
   }
   log.Printf("Created role %v.\n", *role.RoleName)
   log.Println("Let's give AWS a few seconds to propagate resources...")
   scenario.helper.Pause(10)
  }
  log.Println(strings.Repeat("-", 88))
  return role
}

// CreateFunction creates a Lambda function and uploads a handler written in Python.
// The code for the Python handler is packaged as a []byte in .zip format.
func (scenario GetStartedFunctionsScenario) CreateFunction(ctx context.Context, role
  *iamtypes.Role) string {
  log.Println("Let's create a function that increments a number.\n" +
   "The function uses the 'lambda_handler_basic.py' script found in the \n" +
   "'handlers' directory of this project.")
  funcName := scenario.questioner.Ask("Enter a name for the Lambda function:",
  demotools.NotEmpty{})
  zipPackage := scenario.helper.CreateDeploymentPackage("lambda_handler_basic.py",
  fmt.Sprintf("%v.py", funcName))
  log.Printf("Creating function %v and waiting for it to be ready.", funcName)
  funcState := scenario.functionWrapper.CreateFunction(ctx, funcName,
  fmt.Sprintf("%v.lambda_handler", funcName),
   role.Arn, zipPackage)
  log.Printf("Your function is %v.", funcState)
  log.Println(strings.Repeat("-", 88))
  return funcName
}

// InvokeIncrement invokes a Lambda function that increments a number. The function
```

```
// parameters are contained in a Go struct that is used to serialize the parameters
 to
// a JSON payload that is passed to the function.
// The result payload is deserialized into a Go struct that contains an int value.
func (scenario GetStartedFunctionsScenario) InvokeIncrement(ctx context.Context,
 funcName string) {
 parameters := actions.IncrementParameters{Action: "increment"}
 log.Println("Let's invoke our function. This function increments a number.")
 parameters.Number = scenario.questioner.AskInt("Enter a number to increment:",
 demotools.NotEmpty{})
 log.Printf("Invoking %v with %v...\n", funcName, parameters.Number)
 invokeOutput := scenario.functionWrapper.Invoke(ctx, funcName, parameters, false)
 var payload actions.LambdaResultInt
 err := json.Unmarshal(invokeOutput.Payload, &payload)
 if err != nil {
  log.Panicf("Couldn't unmarshal payload from invoking %v. Here's why: %v\n",
   funcName, err)
 }
 log.Printf("Invoking %v with %v returned %v.\n", funcName, parameters.Number,
 payload)
 log.Println(strings.Repeat("-", 88))
}

// UpdateFunction updates the code for a Lambda function by uploading a simple
 arithmetic
// calculator written in Python. The code for the Python handler is packaged as a
// []byte in .zip format.
// After the code is updated, the configuration is also updated with a new log
// level that instructs the handler to log additional information.
func (scenario GetStartedFunctionsScenario) UpdateFunction(ctx context.Context,
 funcName string) {
 log.Println("Let's update the function to an arithmetic calculator.\n" +
  "The function uses the 'lambda_handler_calculator.py' script found in the \n" +
  "'handlers' directory of this project.")
 scenario.questioner.Ask("Press Enter when you're ready.")
 log.Println("Creating deployment package...")
 zipPackage :=
 scenario.helper.CreateDeploymentPackage("lambda_handler_calculator.py",
  fmt.Sprintf("%v.py", funcName))
 log.Println("...and updating the Lambda function and waiting for it to be ready.")
 funcState := scenario.functionWrapper.UpdateFunctionCode(ctx, funcName, zipPackage)
 log.Printf("Updated function %v. Its current state is %v.", funcName, funcState)
 log.Println("This function uses an environment variable to control logging level.")
 log.Println("Let's set it to DEBUG to get the most logging.")
```

```
 scenario.functionWrapper.UpdateFunctionConfiguration(ctx, funcName,
  map[string]string{"LOG_LEVEL": "DEBUG"})
 log.Println(strings.Repeat("-", 88))
}

// InvokeCalculator invokes the Lambda calculator function. The parameters are
 stored in a
// Go struct that is used to serialize the parameters to a JSON payload. That
 payload is then passed
// to the function.
// The result payload is deserialized to a Go struct that stores the result as
 either an
// int or float32, depending on the kind of operation that was specified.
func (scenario GetStartedFunctionsScenario) InvokeCalculator(ctx context.Context,
 funcName string) {
 wantInvoke := true
 choices := []string{"plus", "minus", "times", "divided-by"}
 for wantInvoke {
  choice := scenario.questioner.AskChoice("Select an arithmetic operation:\n",
 choices)
  x := scenario.questioner.AskInt("Enter a value for x:", demotools.NotEmpty{})
  y := scenario.questioner.AskInt("Enter a value for y:", demotools.NotEmpty{})
  log.Printf("Invoking %v %v %v...", x, choices[choice], y)
  calcParameters := actions.CalculatorParameters{
   Action: choices[choice],
   X:      x,
   Y:      y,
  }
  invokeOutput := scenario.functionWrapper.Invoke(ctx, funcName, calcParameters,
 true)
  var payload any
  if choice == 3 { // divide-by results in a float.
   payload = actions.LambdaResultFloat{}
  } else {
   payload = actions.LambdaResultInt{}
  }
  err := json.Unmarshal(invokeOutput.Payload, &payload)
  if err != nil {
   log.Panicf("Couldn't unmarshal payload from invoking %v. Here's why: %v\n",
    funcName, err)
  }
  log.Printf("Invoking %v with %v %v %v returned %v.\n", funcName,
   calcParameters.X, calcParameters.Action, calcParameters.Y, payload)
  scenario.questioner.Ask("Press Enter to see the logs from the call.")
```

```
  logRes, err := base64.StdEncoding.DecodeString(*invokeOutput.LogResult)
  if err != nil {
   log.Panicf("Couldn't decode log result. Here's why: %v\n", err)
  }
  log.Println(string(logRes))
  wantInvoke = scenario.questioner.AskBool("Do you want to calculate again? (y/n)",
 "y")
 }
 log.Println(strings.Repeat("-", 88))
}

// ListFunctions lists up to the specified number of functions for your account.
func (scenario GetStartedFunctionsScenario) ListFunctions(ctx context.Context) {
 count := scenario.questioner.AskInt(
  "Let's list functions for your account. How many do you want to see?",
 demotools.NotEmpty{})
 functions := scenario.functionWrapper.ListFunctions(ctx, count)
 log.Printf("Found %v functions:", len(functions))
 for _, function := range functions {
  log.Printf("\t%v", *function.FunctionName)
 }
 log.Println(strings.Repeat("-", 88))
}

// Cleanup removes the IAM and Lambda resources created by the example.
func (scenario GetStartedFunctionsScenario) Cleanup(ctx context.Context, role
 *iamtypes.Role, funcName string) {
 if scenario.questioner.AskBool("Do you want to clean up resources created for this
 example? (y/n)",
  "y") {
  iamClient := iam.NewFromConfig(scenario.sdkConfig)
  policiesOutput, err := iamClient.ListAttachedRolePolicies(ctx,
   &iam.ListAttachedRolePoliciesInput{RoleName: role.RoleName})
  if err != nil {
   log.Panicf("Couldn't get policies attached to role %v. Here's why: %v\n",
    *role.RoleName, err)
  }
  for _, policy := range policiesOutput.AttachedPolicies {
   _, err = iamClient.DetachRolePolicy(ctx, &iam.DetachRolePolicyInput{
    PolicyArn: policy.PolicyArn, RoleName: role.RoleName,
   })
   if err != nil {
    log.Panicf("Couldn't detach policy %v from role %v. Here's why: %v\n",
     *policy.PolicyArn, *role.RoleName, err)
```

```
   }
  }
  _, err = iamClient.DeleteRole(ctx, &iam.DeleteRoleInput{RoleName: role.RoleName})
  if err != nil {
   log.Panicf("Couldn't delete role %v. Here's why: %v\n", *role.RoleName, err)
  }
  log.Printf("Deleted role %v.\n", *role.RoleName)

  scenario.functionWrapper.DeleteFunction(ctx, funcName)
  log.Printf("Deleted function %v.\n", funcName)
 } else {
  log.Println("Okay. Don't forget to delete the resources when you're done with
 them.")
 }
}

// IScenarioHelper abstracts I/O and wait functions from a scenario so that they
// can be mocked for unit testing.
type IScenarioHelper interface {
 Pause(secs int)
 CreateDeploymentPackage(sourceFile string, destinationFile string) *bytes.Buffer
}

// ScenarioHelper lets the caller specify the path to Lambda handler functions.
type ScenarioHelper struct {
 HandlerPath string
}

// Pause waits for the specified number of seconds.
func (helper *ScenarioHelper) Pause(secs int) {
 time.Sleep(time.Duration(secs) * time.Second)
}

// CreateDeploymentPackage creates an AWS Lambda deployment package from a source
 file. The
// deployment package is stored in .zip format in a bytes.Buffer. The buffer can be
// used to pass a []byte to Lambda when creating the function.
// The specified destinationFile is the name to give the file when it's deployed to
 Lambda.
func (helper *ScenarioHelper) CreateDeploymentPackage(sourceFile string,
 destinationFile string) *bytes.Buffer {
 var err error
 buffer := &bytes.Buffer{}
 writer := zip.NewWriter(buffer)
```

```
 zFile, err := writer.Create(destinationFile)
 if err != nil {
  log.Panicf("Couldn't create destination archive %v. Here's why: %v\n",
 destinationFile, err)
 }
 sourceBody, err := os.ReadFile(fmt.Sprintf("%v/%v", helper.HandlerPath,
 sourceFile))
 if err != nil {
  log.Panicf("Couldn't read handler source file %v. Here's why: %v\n",
   sourceFile, err)
 } else {
  _, err = zFile.Write(sourceBody)
  if err != nil {
   log.Panicf("Couldn't write handler %v to zip archive. Here's why: %v\n",
    sourceFile, err)
  }
 }
 err = writer.Close()
 if err != nil {
  log.Panicf("Couldn't close zip writer. Here's why: %v\n", err)
 }
 return buffer
}
```

個別の Lambda アクションをラップする構造体を作成します。

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
```

```
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}


// GetFunction gets data about the Lambda function specified by functionName.
func (wrapper FunctionWrapper) GetFunction(ctx context.Context, functionName string)
 types.State {
 var state types.State
 funcOutput, err := wrapper.LambdaClient.GetFunction(ctx, &lambda.GetFunctionInput{
  FunctionName: aws.String(functionName),
 })
 if err != nil {
  log.Panicf("Couldn't get function %v. Here's why: %v\n", functionName, err)
 } else {
  state = funcOutput.Configuration.State
 }
 return state
}



// CreateFunction creates a new Lambda function from code contained in the
 zipPackage
// buffer. The specified handlerName must match the name of the file and function
// contained in the uploaded code. The role specified by iamRoleArn is assumed by
// Lambda and grants specific permissions.
// When the function already exists, types.StateActive is returned.
// When the function is created, a lambda.FunctionActiveV2Waiter is used to wait
 until the
// function is active.
func (wrapper FunctionWrapper) CreateFunction(ctx context.Context, functionName
 string, handlerName string,
 iamRoleArn *string, zipPackage *bytes.Buffer) types.State {
 var state types.State
 _, err := wrapper.LambdaClient.CreateFunction(ctx, &lambda.CreateFunctionInput{
  Code:         &types.FunctionCode{ZipFile: zipPackage.Bytes()},
  FunctionName: aws.String(functionName),
  Role:         iamRoleArn,
  Handler:      aws.String(handlerName),
  Publish:      true,
  Runtime:      types.RuntimePython39,
 })
```

```
 if err != nil {
  var resConflict *types.ResourceConflictException
  if errors.As(err, &resConflict) {
   log.Printf("Function %v already exists.\n", functionName)
   state = types.StateActive
  } else {
   log.Panicf("Couldn't create function %v. Here's why: %v\n", functionName, err)
  }
 } else {
  waiter := lambda.NewFunctionActiveV2Waiter(wrapper.LambdaClient)
  funcOutput, err := waiter.WaitForOutput(ctx, &lambda.GetFunctionInput{
   FunctionName: aws.String(functionName)}, 1*time.Minute)
  if err != nil {
   log.Panicf("Couldn't wait for function %v to be active. Here's why: %v\n",
 functionName, err)
  } else {
   state = funcOutput.Configuration.State
  }
 }
 return state
}



// UpdateFunctionCode updates the code for the Lambda function specified by
 functionName.
// The existing code for the Lambda function is entirely replaced by the code in the
// zipPackage buffer. After the update action is called, a
 lambda.FunctionUpdatedV2Waiter
// is used to wait until the update is successful.
func (wrapper FunctionWrapper) UpdateFunctionCode(ctx context.Context, functionName
 string, zipPackage *bytes.Buffer) types.State {
 var state types.State
 _, err := wrapper.LambdaClient.UpdateFunctionCode(ctx,
 &lambda.UpdateFunctionCodeInput{
  FunctionName: aws.String(functionName), ZipFile: zipPackage.Bytes(),
 })
 if err != nil {
  log.Panicf("Couldn't update code for function %v. Here's why: %v\n", functionName,
 err)
 } else {
  waiter := lambda.NewFunctionUpdatedV2Waiter(wrapper.LambdaClient)
  funcOutput, err := waiter.WaitForOutput(ctx, &lambda.GetFunctionInput{
   FunctionName: aws.String(functionName)}, 1*time.Minute)
```

```
  if err != nil {
   log.Panicf("Couldn't wait for function %v to be active. Here's why: %v\n",
 functionName, err)
  } else {
   state = funcOutput.Configuration.State
  }
 }
 return state
}



// UpdateFunctionConfiguration updates a map of environment variables configured for
// the Lambda function specified by functionName.
func (wrapper FunctionWrapper) UpdateFunctionConfiguration(ctx context.Context,
 functionName string, envVars map[string]string) {
 _, err := wrapper.LambdaClient.UpdateFunctionConfiguration(ctx,
 &lambda.UpdateFunctionConfigurationInput{
  FunctionName: aws.String(functionName),
  Environment:  &types.Environment{Variables: envVars},
 })
 if err != nil {
  log.Panicf("Couldn't update configuration for %v. Here's why: %v", functionName,
 err)
 }
}



// ListFunctions lists up to maxItems functions for the account. This function uses
 a
// lambda.ListFunctionsPaginator to paginate the results.
func (wrapper FunctionWrapper) ListFunctions(ctx context.Context, maxItems int)
 []types.FunctionConfiguration {
 var functions []types.FunctionConfiguration
 paginator := lambda.NewListFunctionsPaginator(wrapper.LambdaClient,
 &lambda.ListFunctionsInput{
  MaxItems: aws.Int32(int32(maxItems)),
 })
 for paginator.HasMorePages() && len(functions) < maxItems {
  pageOutput, err := paginator.NextPage(ctx)
  if err != nil {
   log.Panicf("Couldn't list functions for your account. Here's why: %v\n", err)
  }
```

```
  functions = append(functions, pageOutput.Functions...)
 }
 return functions
}



// DeleteFunction deletes the Lambda function specified by functionName.
func (wrapper FunctionWrapper) DeleteFunction(ctx context.Context, functionName
 string) {
 _, err := wrapper.LambdaClient.DeleteFunction(ctx, &lambda.DeleteFunctionInput{
  FunctionName: aws.String(functionName),
 })
 if err != nil {
  log.Panicf("Couldn't delete function %v. Here's why: %v\n", functionName, err)
 }
}



// Invoke invokes the Lambda function specified by functionName, passing the
 parameters
// as a JSON payload. When getLog is true, types.LogTypeTail is specified, which
 tells
// Lambda to include the last few log lines in the returned result.
func (wrapper FunctionWrapper) Invoke(ctx context.Context, functionName string,
 parameters any, getLog bool) *lambda.InvokeOutput {
 logType := types.LogTypeNone
 if getLog {
  logType = types.LogTypeTail
 }
 payload, err := json.Marshal(parameters)
 if err != nil {
  log.Panicf("Couldn't marshal parameters to JSON. Here's why %v\n", err)
 }
 invokeOutput, err := wrapper.LambdaClient.Invoke(ctx, &lambda.InvokeInput{
  FunctionName: aws.String(functionName),
  LogType:      logType,
  Payload:      payload,
 })
 if err != nil {
  log.Panicf("Couldn't invoke function %v. Here's why: %v\n", functionName, err)
 }
 return invokeOutput
```

```
}



// IncrementParameters is used to serialize parameters to the increment Lambda
 handler.
type IncrementParameters struct {
 Action string `json:"action"`
 Number int    `json:"number"`
}

// CalculatorParameters is used to serialize parameters to the calculator Lambda
 handler.
type CalculatorParameters struct {
 Action string `json:"action"`
 X      int    `json:"x"`
 Y      int    `json:"y"`
}

// LambdaResultInt is used to deserialize an int result from a Lambda handler.
type LambdaResultInt struct {
 Result int `json:"result"`
}

// LambdaResultFloat is used to deserialize a float32 result from a Lambda handler.
type LambdaResultFloat struct {
 Result float32 `json:"result"`
}
```

数値をインクリメントする Lambda ハンドラーを定義します。

```
import logging

logger = logging.getLogger()
logger.setLevel(logging.INFO)


def lambda_handler(event, context):
    """
    Accepts an action and a single number, performs the specified action on the
 number,
```

```
    and returns the result. The only allowable action is 'increment'.

    :param event: The event dict that contains the parameters sent when the function
                  is invoked.
    :param context: The context in which the function is called.
    :return: The result of the action.
    """
    result = None
    action = event.get("action")
    if action == "increment":
        result = event.get("number", 0) + 1
        logger.info("Calculated result of %s", result)
    else:
        logger.error("%s is not a valid action.", action)

    response = {"result": result}
    return response
```

算術演算を実行する 2 番目の Lambda ハンドラーを定義します。

```
import logging
import os


logger = logging.getLogger()

# Define a list of Python lambda functions that are called by this AWS Lambda
 function.
ACTIONS = {
    "plus": lambda x, y: x + y,
    "minus": lambda x, y: x - y,
    "times": lambda x, y: x * y,
    "divided-by": lambda x, y: x / y,
}


def lambda_handler(event, context):
    """
    Accepts an action and two numbers, performs the specified action on the numbers,
    and returns the result.
```

```
    :param event: The event dict that contains the parameters sent when the function
                  is invoked.
    :param context: The context in which the function is called.
    :return: The result of the specified action.
    """
    # Set the log level based on a variable configured in the Lambda environment.
    logger.setLevel(os.environ.get("LOG_LEVEL", logging.INFO))
    logger.debug("Event: %s", event)

    action = event.get("action")
    func = ACTIONS.get(action)
    x = event.get("x")
    y = event.get("y")
    result = None
    try:
        if func is not None and x is not None and y is not None:
            result = func(x, y)
            logger.info("%s %s %s is %s", x, action, y, result)
        else:
            logger.error("I can't calculate %s %s %s.", x, action, y)
    except ZeroDivisionError:
        logger.warning("I can't divide %s by 0!", x)

    response = {"result": result}
    return response
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - CreateFunction
  - DeleteFunction
  - GetFunction
  - Invoke
  - ListFunctions
  - UpdateFunctionCode
  - UpdateFunctionConfiguration

アクション

`CreateFunction`

次のコード例は、`CreateFunction` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// CreateFunction creates a new Lambda function from code contained in the
 zipPackage
// buffer. The specified handlerName must match the name of the file and function
// contained in the uploaded code. The role specified by iamRoleArn is assumed by
// Lambda and grants specific permissions.
// When the function already exists, types.StateActive is returned.
```

```
// When the function is created, a lambda.FunctionActiveV2Waiter is used to wait
 until the
// function is active.
func (wrapper FunctionWrapper) CreateFunction(ctx context.Context, functionName
 string, handlerName string,
 iamRoleArn *string, zipPackage *bytes.Buffer) types.State {
 var state types.State
 _, err := wrapper.LambdaClient.CreateFunction(ctx, &lambda.CreateFunctionInput{
  Code:         &types.FunctionCode{ZipFile: zipPackage.Bytes()},
  FunctionName: aws.String(functionName),
  Role:         iamRoleArn,
  Handler:      aws.String(handlerName),
  Publish:      true,
  Runtime:      types.RuntimePython39,
 })
 if err != nil {
  var resConflict *types.ResourceConflictException
  if errors.As(err, &resConflict) {
   log.Printf("Function %v already exists.\n", functionName)
   state = types.StateActive
  } else {
   log.Panicf("Couldn't create function %v. Here's why: %v\n", functionName, err)
  }
 } else {
  waiter := lambda.NewFunctionActiveV2Waiter(wrapper.LambdaClient)
  funcOutput, err := waiter.WaitForOutput(ctx, &lambda.GetFunctionInput{
   FunctionName: aws.String(functionName)}, 1*time.Minute)
  if err != nil {
   log.Panicf("Couldn't wait for function %v to be active. Here's why: %v\n",
 functionName, err)
  } else {
   state = funcOutput.Configuration.State
  }
 }
 return state
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateFunction」を参照してください。

DeleteFunction

次のコード例は、DeleteFunction を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// DeleteFunction deletes the Lambda function specified by functionName.
func (wrapper FunctionWrapper) DeleteFunction(ctx context.Context, functionName
 string) {
 _, err := wrapper.LambdaClient.DeleteFunction(ctx, &lambda.DeleteFunctionInput{
  FunctionName: aws.String(functionName),
 })
 if err != nil {
  log.Panicf("Couldn't delete function %v. Here's why: %v\n", functionName, err)
 }
```

```
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteFunction」を参照してください。

`GetFunction`

次のコード例は、`GetFunction` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}
```

```
// GetFunction gets data about the Lambda function specified by functionName.
func (wrapper FunctionWrapper) GetFunction(ctx context.Context, functionName string)
 types.State {
 var state types.State
 funcOutput, err := wrapper.LambdaClient.GetFunction(ctx, &lambda.GetFunctionInput{
  FunctionName: aws.String(functionName),
 })
 if err != nil {
  log.Panicf("Couldn't get function %v. Here's why: %v\n", functionName, err)
 } else {
  state = funcOutput.Configuration.State
 }
 return state
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「GetFunction」を参照してください。

Invoke

次のコード例は、Invoke を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// Invoke invokes the Lambda function specified by functionName, passing the
 parameters
// as a JSON payload. When getLog is true, types.LogTypeTail is specified, which
 tells
// Lambda to include the last few log lines in the returned result.
func (wrapper FunctionWrapper) Invoke(ctx context.Context, functionName string,
 parameters any, getLog bool) *lambda.InvokeOutput {
 logType := types.LogTypeNone
 if getLog {
  logType = types.LogTypeTail
 }
 payload, err := json.Marshal(parameters)
 if err != nil {
  log.Panicf("Couldn't marshal parameters to JSON. Here's why %v\n", err)
 }
 invokeOutput, err := wrapper.LambdaClient.Invoke(ctx, &lambda.InvokeInput{
  FunctionName: aws.String(functionName),
  LogType:      logType,
  Payload:      payload,
 })
 if err != nil {
  log.Panicf("Couldn't invoke function %v. Here's why: %v\n", functionName, err)
 }
 return invokeOutput
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「Invoke」を参照してください。

`ListFunctions`

次のコード例は、`ListFunctions` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// ListFunctions lists up to maxItems functions for the account. This function uses
 a
// lambda.ListFunctionsPaginator to paginate the results.
func (wrapper FunctionWrapper) ListFunctions(ctx context.Context, maxItems int)
 []types.FunctionConfiguration {
 var functions []types.FunctionConfiguration
 paginator := lambda.NewListFunctionsPaginator(wrapper.LambdaClient,
 &lambda.ListFunctionsInput{
  MaxItems: aws.Int32(int32(maxItems)),
```

```
 })
 for paginator.HasMorePages() && len(functions) < maxItems {
  pageOutput, err := paginator.NextPage(ctx)
  if err != nil {
   log.Panicf("Couldn't list functions for your account. Here's why: %v\n", err)
  }
  functions = append(functions, pageOutput.Functions...)
 }
 return functions
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListFunctions」を参照してください。

`UpdateFunctionCode`

次のコード例は、`UpdateFunctionCode` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)
```

```
// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// UpdateFunctionCode updates the code for the Lambda function specified by
 functionName.
// The existing code for the Lambda function is entirely replaced by the code in the
// zipPackage buffer. After the update action is called, a
 lambda.FunctionUpdatedV2Waiter
// is used to wait until the update is successful.
func (wrapper FunctionWrapper) UpdateFunctionCode(ctx context.Context, functionName
 string, zipPackage *bytes.Buffer) types.State {
 var state types.State
 _, err := wrapper.LambdaClient.UpdateFunctionCode(ctx,
 &lambda.UpdateFunctionCodeInput{
  FunctionName: aws.String(functionName), ZipFile: zipPackage.Bytes(),
 })
 if err != nil {
  log.Panicf("Couldn't update code for function %v. Here's why: %v\n", functionName,
 err)
 } else {
  waiter := lambda.NewFunctionUpdatedV2Waiter(wrapper.LambdaClient)
  funcOutput, err := waiter.WaitForOutput(ctx, &lambda.GetFunctionInput{
   FunctionName: aws.String(functionName)}, 1*time.Minute)
  if err != nil {
   log.Panicf("Couldn't wait for function %v to be active. Here's why: %v\n",
 functionName, err)
  } else {
   state = funcOutput.Configuration.State
  }
 }
 return state
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「UpdateFunctionCode」を参照してください。

UpdateFunctionConfiguration

次のコード例は、UpdateFunctionConfiguration を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "encoding/json"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/lambda"
 "github.com/aws/aws-sdk-go-v2/service/lambda/types"
)

// FunctionWrapper encapsulates function actions used in the examples.
// It contains an AWS Lambda service client that is used to perform user actions.
type FunctionWrapper struct {
 LambdaClient *lambda.Client
}



// UpdateFunctionConfiguration updates a map of environment variables configured for
// the Lambda function specified by functionName.
func (wrapper FunctionWrapper) UpdateFunctionConfiguration(ctx context.Context,
 functionName string, envVars map[string]string) {
 _, err := wrapper.LambdaClient.UpdateFunctionConfiguration(ctx,
 &lambda.UpdateFunctionConfigurationInput{
  FunctionName: aws.String(functionName),
  Environment:  &types.Environment{Variables: envVars},
 })
```

```
 if err != nil {
  log.Panicf("Couldn't update configuration for %v. Here's why: %v", functionName,
 err)
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「UpdateFunctionConfiguration」を参照してください。

シナリオ

Lambda 関数を使用して登録済みのユーザーを自動的に確認する

次のコード例は、Lambda 関数を使用して登録済みの Amazon Cognito ユーザーを自動的に確認する方法を示しています。

- PreSignUp トリガーの Lambda 関数を呼び出すようにユーザープールを設定します。
- Amazon Cognito でユーザーをサインアップする
- Lambda 関数は DynamoDB テーブルをスキャンし、登録済みのユーザーを自動的に確認します。
- 新しいユーザーとしてサインインし、リソースをクリーンアップします。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

コマンドプロンプトからインタラクティブなシナリオを実行します。

```
import (
 "context"
 "errors"
 "log"
 "strings"
```

```
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// AutoConfirm separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type AutoConfirm struct {
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}

// NewAutoConfirm constructs a new auto confirm runner.
func NewAutoConfirm(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) AutoConfirm {
 scenario := AutoConfirm{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddPreSignUpTrigger adds a Lambda handler as an invocation target for the
 PreSignUp trigger.
func (runner *AutoConfirm) AddPreSignUpTrigger(ctx context.Context, userPoolId
 string, functionArn string) {
 log.Printf("Let's add a Lambda function to handle the PreSignUp trigger from
 Cognito.\n" +
  "This trigger happens when a user signs up, and lets your function take action
 before the main Cognito\n" +
  "sign up processing occurs.\n")
 err := runner.cognitoActor.UpdateTriggers(
  ctx, userPoolId,
```

```
  actions.TriggerInfo{Trigger: actions.PreSignUp, HandlerArn:
 aws.String(functionArn)})
 if err != nil {
  panic(err)
 }
 log.Printf("Lambda function %v added to user pool %v to handle the PreSignUp
 trigger.\n",
  functionArn, userPoolId)
}

// SignUpUser signs up a user from the known user table with a password you specify.
func (runner *AutoConfirm) SignUpUser(ctx context.Context, clientId string,
 usersTable string) (string, string) {
 log.Println("Let's sign up a user to your Cognito user pool. When the user's email
 matches an email in the\n" +
  "DynamoDB known users table, it is automatically verified and the user is
 confirmed.")

 knownUsers, err := runner.helper.GetKnownUsers(ctx, usersTable)
 if err != nil {
  panic(err)
 }
 userChoice := runner.questioner.AskChoice("Which user do you want to use?\n",
 knownUsers.UserNameList())
 user := knownUsers.Users[userChoice]

 var signedUp bool
 var userConfirmed bool
 password := runner.questioner.AskPassword("Enter a password that has at least eight
 characters, uppercase, lowercase, numbers and symbols.\n"+
  "(the password will not display as you type):", 8)
 for !signedUp {
  log.Printf("Signing up user '%v' with email '%v' to Cognito.\n", user.UserName,
 user.UserEmail)
  userConfirmed, err = runner.cognitoActor.SignUp(ctx, clientId, user.UserName,
 password, user.UserEmail)
  if err != nil {
   var invalidPassword *types.InvalidPasswordException
   if errors.As(err, &invalidPassword) {
    password = runner.questioner.AskPassword("Enter another password:", 8)
   } else {
    panic(err)
   }
  } else {
```

```
    signedUp = true
   }
  }
  log.Printf("User %v signed up, confirmed = %v.\n", user.UserName, userConfirmed)

  log.Println(strings.Repeat("-", 88))

  return user.UserName, password
}

// SignInUser signs in a user.
func (runner *AutoConfirm) SignInUser(ctx context.Context, clientId string, userName
 string, password string) string {
 runner.questioner.Ask("Press Enter when you're ready to continue.")
 log.Printf("Let's sign in as %v...\n", userName)
 authResult, err := runner.cognitoActor.SignIn(ctx, clientId, userName, password)
 if err != nil {
  panic(err)
 }
 log.Printf("Successfully signed in. Your access token starts with: %v...\n",
 (*authResult.AccessToken)[:10])
 log.Println(strings.Repeat("-", 88))
 return *authResult.AccessToken
}

// Run runs the scenario.
func (runner *AutoConfirm) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")

 log.Println(strings.Repeat("-", 88))

 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]
```

```
 runner.helper.PopulateUserTable(ctx, stackOutputs["TableName"])

 runner.AddPreSignUpTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["AutoConfirmFunctionArn"])
 runner.resources.triggers = append(runner.resources.triggers, actions.PreSignUp)
 userName, password := runner.SignUpUser(ctx, stackOutputs["UserPoolClientId"],
 stackOutputs["TableName"])
 runner.helper.ListRecentLogEvents(ctx, stackOutputs["AutoConfirmFunction"])
 runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
  runner.SignInUser(ctx, stackOutputs["UserPoolClientId"], userName, password))

 runner.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Lambda 関数を使用して PreSignUp トリガーを処理します。

```
import (
 "context"
 "log"
 "os"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 dynamodbtypes "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

const TABLE_NAME = "TABLE_NAME"

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string `dynamodbav:"UserName"`
```

```
 UserEmail string `dynamodbav:"UserEmail"`
}

// GetKey marshals the user email value to a DynamoDB key format.
func (user UserInfo) GetKey() map[string]dynamodbtypes.AttributeValue {
 userEmail, err := attributevalue.Marshal(user.UserEmail)
 if err != nil {
  panic(err)
 }
 return map[string]dynamodbtypes.AttributeValue{"UserEmail": userEmail}
}

type handler struct {
 dynamoClient *dynamodb.Client
}

// HandleRequest handles the PreSignUp event by looking up a user in an Amazon
 DynamoDB table and
// specifying whether they should be confirmed and verified.
func (h *handler) HandleRequest(ctx context.Context, event
 events.CognitoEventUserPoolsPreSignup) (events.CognitoEventUserPoolsPreSignup,
 error) {
 log.Printf("Received presignup from %v for user '%v'", event.TriggerSource,
 event.UserName)
 if event.TriggerSource != "PreSignUp_SignUp" {
  // Other trigger sources, such as PreSignUp_AdminInitiateAuth, ignore the response
 from this handler.
  return event, nil
 }
 tableName := os.Getenv(TABLE_NAME)
 user := UserInfo{
  UserEmail: event.Request.UserAttributes["email"],
 }
 log.Printf("Looking up email %v in table %v.\n", user.UserEmail, tableName)
 output, err := h.dynamoClient.GetItem(ctx, &dynamodb.GetItemInput{
  Key:       user.GetKey(),
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Error looking up email %v.\n", user.UserEmail)
  return event, err
 }
 if output.Item == nil {
```

```
  log.Printf("Email %v not found. Email verification is required.\n",
 user.UserEmail)
  return event, err
 }

 err = attributevalue.UnmarshalMap(output.Item, &user)
 if err != nil {
  log.Printf("Couldn't unmarshal DynamoDB item. Here's why: %v\n", err)
  return event, err
 }

 if user.UserName != event.UserName {
  log.Printf("UserEmail %v found, but stored UserName '%v' does not match supplied
 UserName '%v'. Verification is required.\n",
    user.UserEmail, user.UserName, event.UserName)
 } else {
  log.Printf("UserEmail %v found with matching UserName %v. User is confirmed.\n",
 user.UserEmail, user.UserName)
  event.Response.AutoConfirmUser = true
  event.Response.AutoVerifyEmail = true
 }

 return event, err
}

func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Panicln(err)
 }
 h := handler{
  dynamoClient: dynamodb.NewFromConfig(sdkConfig),
 }
 lambda.Start(h.HandleRequest)
}
```

一般的なタスクを実行する構造体を作成します。

```
import (
```

```
 "context"
 "log"
 "strings"
 "time"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// IScenarioHelper defines common functions used by the workflows in this example.
type IScenarioHelper interface {
 Pause(secs int)
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}

// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
 scenario := ScenarioHelper{
  questioner:  questioner,
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
```

```
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}

// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
 }
 return knownUsers, err
}

// AddKnownUser adds a user to the known users table.
```

```
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
 helper.Pause(10)
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Amazon Cognito アクションをラップする構造体を作成します。

```
import (
 "context"
```

```
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
```

```
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
```

```
 }
 return confirmed, err
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
```

```
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}
```

```
// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
```

```
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

DynamoDB アクションをラップする構造体を作成します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
}

// LoginInfo defines structured custom login data.
type LoginInfo struct {
 UserPoolId string
 ClientId   string
```

```
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
 }
 return names
}

// PopulateTable adds a set of test users to the table.
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
}

// Scan scans the table for all items.
```

```
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
 }
 return userList, err
}

// AddUser adds a user item to a table.
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

CloudWatch Logs アクションをラップする構造体を作成します。

```
import (
 "context"
 "fmt"
 "log"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)

type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
  Descending:   aws.Bool(true),
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
```

```
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
}
```

CloudFormation アクションをラップする構造体を作成します。

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
```

```
 }
 return stackOutputs
}
```

リソースをクリーンアップします。

```
import (
 "context"
 "log"
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}

// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources \n"
 +
```

```
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
 if wantDelete {
  for _, accessToken := range resources.userAccessTokens {
   err := resources.cognitoActor.DeleteUser(ctx, accessToken)
   if err != nil {
    log.Println("Couldn't delete user during cleanup.")
    panic(err)
   }
   log.Println("Deleted user.")
  }
  triggerList := make([]actions.TriggerInfo, len(resources.triggers))
  for i := 0; i < len(resources.triggers); i++ {
   triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
 nil}
  }
  err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
 triggerList...)
  if err != nil {
   log.Println("Couldn't update Cognito triggers during cleanup.")
   panic(err)
  }
  log.Println("Removed Cognito triggers from user pool.")
 } else {
  log.Println("Be sure to remove resources when you're done with them to avoid
 unexpected charges!")
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - DeleteUser
  - InitiateAuth
  - SignUp
  - UpdateUserPool

Lambda 関数を使用して登録済みのユーザーを自動的に移行する

次のコード例は、Lambda 関数を使用して登録済みの Amazon Cognito ユーザーを自動的に移行する方法を示しています。

- `MigrateUser` トリガーの Lambda 関数を呼び出すようにユーザープールを設定します。
- ユーザープールにないユーザー名と E メールで Amazon Cognito にサインインします。
- Lambda 関数は DynamoDB テーブルをスキャンし、登録済みのユーザーをユーザープールに自動的に移行します。
- パスワードを忘れた場合のフローを実行して、移行したユーザーのパスワードをリセットします。
- 新しいユーザーとしてサインインし、リソースをクリーンアップします。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

コマンドプロンプトからインタラクティブなシナリオを実行します。

```
import (
 "context"
 "errors"
 "fmt"
 "log"
 "strings"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// MigrateUser separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
```

```
type MigrateUser struct {
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}

// NewMigrateUser constructs a new migrate user runner.
func NewMigrateUser(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) MigrateUser {
 scenario := MigrateUser{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddMigrateUserTrigger adds a Lambda handler as an invocation target for the
 MigrateUser trigger.
func (runner *MigrateUser) AddMigrateUserTrigger(ctx context.Context, userPoolId
 string, functionArn string) {
 log.Printf("Let's add a Lambda function to handle the MigrateUser trigger from
 Cognito.\n" +
  "This trigger happens when an unknown user signs in, and lets your function take
 action before Cognito\n" +
  "rejects the user.\n\n")
 err := runner.cognitoActor.UpdateTriggers(
  ctx, userPoolId,
  actions.TriggerInfo{Trigger: actions.UserMigration, HandlerArn:
 aws.String(functionArn)})
 if err != nil {
  panic(err)
 }
 log.Printf("Lambda function %v added to user pool %v to handle the MigrateUser
 trigger.\n",
  functionArn, userPoolId)

 log.Println(strings.Repeat("-", 88))
}
```

```
// SignInUser adds a new user to the known users table and signs that user in to
 Amazon Cognito.
func (runner *MigrateUser) SignInUser(ctx context.Context, usersTable string,
 clientId string) (bool, actions.User) {
 log.Println("Let's sign in a user to your Cognito user pool. When the username and
 email matches an entry in the\n" +
  "DynamoDB known users table, the email is automatically verified and the user is
 migrated to the Cognito user pool.")

 user := actions.User{}
 user.UserName = runner.questioner.Ask("\nEnter a username:")
 user.UserEmail = runner.questioner.Ask("\nEnter an email that you own. This email
 will be used to confirm user migration\n" +
  "during this example:")

 runner.helper.AddKnownUser(ctx, usersTable, user)

 var err error
 var resetRequired *types.PasswordResetRequiredException
 var authResult *types.AuthenticationResultType
 signedIn := false
 for !signedIn && resetRequired == nil {
  log.Printf("Signing in to Cognito as user '%v'. The expected result is a
 PasswordResetRequiredException.\n\n", user.UserName)
  authResult, err = runner.cognitoActor.SignIn(ctx, clientId, user.UserName, "_")
  if err != nil {
   if errors.As(err, &resetRequired) {
    log.Printf("\nUser '%v' is not in the Cognito user pool but was found in the
 DynamoDB known users table.\n"+
     "User migration is started and a password reset is required.", user.UserName)
   } else {
    panic(err)
   }
  } else {
   log.Printf("User '%v' successfully signed in. This is unexpected and probably
 means you have not\n"+
    "cleaned up a previous run of this scenario, so the user exist in the Cognito
 user pool.\n"+
    "You can continue this example and select to clean up resources, or manually
 remove\n"+
    "the user from your user pool and try again.", user.UserName)
   runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
 *authResult.AccessToken)
   signedIn = true
```

```
  }
 }

 log.Println(strings.Repeat("-", 88))
 return resetRequired != nil, user
}

// ResetPassword starts a password recovery flow.
func (runner *MigrateUser) ResetPassword(ctx context.Context, clientId string, user
 actions.User) {
 wantCode := runner.questioner.AskBool(fmt.Sprintf("In order to migrate the user to
 Cognito, you must be able to receive a confirmation\n"+
  "code by email at %v. Do you want to send a code (y/n)?", user.UserEmail), "y")
 if !wantCode {
  log.Println("To complete this example and successfully migrate a user to Cognito,
 you must enter an email\n" +
   "you own that can receive a confirmation code.")
  return
 }
 codeDelivery, err := runner.cognitoActor.ForgotPassword(ctx, clientId,
 user.UserName)
 if err != nil {
  panic(err)
 }
 log.Printf("\nA confirmation code has been sent to %v.", *codeDelivery.Destination)
 code := runner.questioner.Ask("Check your email and enter it here:")

 confirmed := false
 password := runner.questioner.AskPassword("\nEnter a password that has at least
 eight characters, uppercase, lowercase, numbers and symbols.\n"+
  "(the password will not display as you type):", 8)
 for !confirmed {
  log.Printf("\nConfirming password reset for user '%v'.\n", user.UserName)
  err = runner.cognitoActor.ConfirmForgotPassword(ctx, clientId, code,
 user.UserName, password)
  if err != nil {
   var invalidPassword *types.InvalidPasswordException
   if errors.As(err, &invalidPassword) {
    password = runner.questioner.AskPassword("\nEnter another password:", 8)
   } else {
    panic(err)
   }
  } else {
   confirmed = true
```

```
  }
 }
 log.Printf("User '%v' successfully confirmed and migrated.\n", user.UserName)
 log.Println("Signing in with your username and password...")
 authResult, err := runner.cognitoActor.SignIn(ctx, clientId, user.UserName,
 password)
 if err != nil {
  panic(err)
 }
 log.Printf("Successfully signed in. Your access token starts with: %v...\n",
 (*authResult.AccessToken)[:10])
 runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
 *authResult.AccessToken)

 log.Println(strings.Repeat("-", 88))
}

// Run runs the scenario.
func (runner *MigrateUser) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")

 log.Println(strings.Repeat("-", 88))

 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]

 runner.AddMigrateUserTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["MigrateUserFunctionArn"])
 runner.resources.triggers = append(runner.resources.triggers,
 actions.UserMigration)
 resetNeeded, user := runner.SignInUser(ctx, stackOutputs["TableName"],
 stackOutputs["UserPoolClientId"])
 if resetNeeded {
```

```
  runner.helper.ListRecentLogEvents(ctx, stackOutputs["MigrateUserFunction"])
  runner.ResetPassword(ctx, stackOutputs["UserPoolClientId"], user)
 }

 runner.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Lambda 関数を使用して MigrateUser トリガーを処理します。

```
import (
 "context"
 "log"
 "os"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/expression"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
)

const TABLE_NAME = "TABLE_NAME"

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string `dynamodbav:"UserName"`
 UserEmail string `dynamodbav:"UserEmail"`
}

type handler struct {
 dynamoClient *dynamodb.Client
}
```

```
// HandleRequest handles the MigrateUser event by looking up a user in an Amazon
 DynamoDB table and
// specifying whether they should be migrated to the user pool.
func (h *handler) HandleRequest(ctx context.Context, event
 events.CognitoEventUserPoolsMigrateUser) (events.CognitoEventUserPoolsMigrateUser,
 error) {
 log.Printf("Received migrate trigger from %v for user '%v'", event.TriggerSource,
 event.UserName)
 if event.TriggerSource != "UserMigration_Authentication" {
  return event, nil
 }
 tableName := os.Getenv(TABLE_NAME)
 user := UserInfo{
  UserName: event.UserName,
 }
 log.Printf("Looking up user '%v' in table %v.\n", user.UserName, tableName)
 filterEx := expression.Name("UserName").Equal(expression.Value(user.UserName))
 expr, err := expression.NewBuilder().WithFilter(filterEx).Build()
 if err != nil {
  log.Printf("Error building expression to query for user '%v'.\n", user.UserName)
  return event, err
 }
 output, err := h.dynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName:                 aws.String(tableName),
  FilterExpression:          expr.Filter(),
  ExpressionAttributeNames:  expr.Names(),
  ExpressionAttributeValues: expr.Values(),
 })
 if err != nil {
  log.Printf("Error looking up user '%v'.\n", user.UserName)
  return event, err
 }
 if len(output.Items) == 0 {
  log.Printf("User '%v' not found, not migrating user.\n", user.UserName)
  return event, err
 }

 var users []UserInfo
 err = attributevalue.UnmarshalListOfMaps(output.Items, &users)
 if err != nil {
  log.Printf("Couldn't unmarshal DynamoDB items. Here's why: %v\n", err)
  return event, err
 }
```

```
 user = users[0]
 log.Printf("UserName '%v' found with email %v. User is migrated and must reset
 password.\n", user.UserName, user.UserEmail)
 event.CognitoEventUserPoolsMigrateUserResponse.UserAttributes = map[string]string{
  "email":          user.UserEmail,
  "email_verified": "true", // email_verified is required for the forgot password
 flow.
 }
 event.CognitoEventUserPoolsMigrateUserResponse.FinalUserStatus = "RESET_REQUIRED"
 event.CognitoEventUserPoolsMigrateUserResponse.MessageAction = "SUPPRESS"

 return event, err
}

func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Panicln(err)
 }
 h := handler{
  dynamoClient: dynamodb.NewFromConfig(sdkConfig),
 }
 lambda.Start(h.HandleRequest)
}
```

一般的なタスクを実行する構造体を作成します。

```
import (
 "context"
 "log"
 "strings"
 "time"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
```

```
)

// IScenarioHelper defines common functions used by the workflows in this example.
type IScenarioHelper interface {
 Pause(secs int)
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}

// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
 scenario := ScenarioHelper{
  questioner:  questioner,
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}
```

```
// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
 }
 return knownUsers, err
}

// AddKnownUser adds a user to the known users table.
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
```

```
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
 helper.Pause(10)
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Amazon Cognito アクションをラップする構造体を作成します。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}
```

```
// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
```

```
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
```

```
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
```

```
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
 }
 return err
}



// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
```

```
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

DynamoDB アクションをラップする構造体を作成します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
}

// LoginInfo defines structured custom login data.
type LoginInfo struct {
 UserPoolId string
 ClientId   string
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
```

```
 }
 return names
}

// PopulateTable adds a set of test users to the table.
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
}

// Scan scans the table for all items.
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
```

```
 }
 return userList, err
}

// AddUser adds a user item to a table.
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

CloudWatch Logs アクションをラップする構造体を作成します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)

type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
```

```
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
  Descending:   aws.Bool(true),
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
}
```

CloudFormation アクションをラップする構造体を作成します。

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

リソースをクリーンアップします。

```
import (
 "context"
 "log"
```

```
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}

// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources \n"
 +
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
 if wantDelete {
  for _, accessToken := range resources.userAccessTokens {
   err := resources.cognitoActor.DeleteUser(ctx, accessToken)
   if err != nil {
    log.Println("Couldn't delete user during cleanup.")
    panic(err)
```

```
    }
    log.Println("Deleted user.")
   }
   triggerList := make([]actions.TriggerInfo, len(resources.triggers))
   for i := 0; i < len(resources.triggers); i++ {
    triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
  nil}
   }
   err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
  triggerList...)
   if err != nil {
    log.Println("Couldn't update Cognito triggers during cleanup.")
    panic(err)
   }
   log.Println("Removed Cognito triggers from user pool.")
  } else {
   log.Println("Be sure to remove resources when you're done with them to avoid
  unexpected charges!")
  }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - ConfirmForgotPassword
  - DeleteUser
  - ForgotPassword
  - InitiateAuth
  - SignUp
  - UpdateUserPool

Amazon Cognito ユーザー認証後に Lambda 関数を使用してカスタムアクティビティデータを書き込む

次のコード例は、Amazon Cognito ユーザー認証後に Lambda 関数を使用してカスタムアクティビティデータを書き込む方法を示しています。

- 管理者関数を使用して、ユーザーをユーザープールに追加します。

- PostAuthentication トリガーの Lambda 関数を呼び出すようにユーザープールを設定します。
- 新しいユーザーを Amazon Cognito にサインインします。
- Lambda 関数は、カスタム情報を CloudWatch Logs と DynamoDB テーブルに書き込みます。
- DynamoDB テーブルからカスタムデータを取得して表示し、リソースをクリーンアップします。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

コマンドプロンプトからインタラクティブなシナリオを実行します。

```
import (
 "context"
 "errors"
 "log"
 "strings"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// ActivityLog separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type ActivityLog struct {
 helper       IScenarioHelper
 questioner   demotools.IQuestioner
 resources    Resources
 cognitoActor *actions.CognitoActions
}
```

```
// NewActivityLog constructs a new activity log runner.
func NewActivityLog(sdkConfig aws.Config, questioner demotools.IQuestioner, helper
 IScenarioHelper) ActivityLog {
 scenario := ActivityLog{
  helper:       helper,
  questioner:   questioner,
  resources:    Resources{},
  cognitoActor: &actions.CognitoActions{CognitoClient:
 cognitoidentityprovider.NewFromConfig(sdkConfig)},
 }
 scenario.resources.init(scenario.cognitoActor, questioner)
 return scenario
}

// AddUserToPool selects a user from the known users table and uses administrator
 credentials to add the user to the user pool.
func (runner *ActivityLog) AddUserToPool(ctx context.Context, userPoolId string,
 tableName string) (string, string) {
 log.Println("To facilitate this example, let's add a user to the user pool using
 administrator privileges.")
 users, err := runner.helper.GetKnownUsers(ctx, tableName)
 if err != nil {
  panic(err)
 }
 user := users.Users[0]
 log.Printf("Adding known user %v to the user pool.\n", user.UserName)
 err = runner.cognitoActor.AdminCreateUser(ctx, userPoolId, user.UserName,
 user.UserEmail)
 if err != nil {
  panic(err)
 }
 pwSet := false
 password := runner.questioner.AskPassword("\nEnter a password that has at least
 eight characters, uppercase, lowercase, numbers and symbols.\n"+
  "(the password will not display as you type):", 8)
 for !pwSet {
  log.Printf("\nSetting password for user '%v'.\n", user.UserName)
  err = runner.cognitoActor.AdminSetUserPassword(ctx, userPoolId, user.UserName,
 password)
  if err != nil {
   var invalidPassword *types.InvalidPasswordException
   if errors.As(err, &invalidPassword) {
    password = runner.questioner.AskPassword("\nEnter another password:", 8)
   } else {
```

```
    panic(err)
   }
  } else {
   pwSet = true
  }
 }

 log.Println(strings.Repeat("-", 88))

 return user.UserName, password
}

// AddActivityLogTrigger adds a Lambda handler as an invocation target for the
 PostAuthentication trigger.
func (runner *ActivityLog) AddActivityLogTrigger(ctx context.Context, userPoolId
 string, activityLogArn string) {
 log.Println("Let's add a Lambda function to handle the PostAuthentication trigger
 from Cognito.\n" +
  "This trigger happens after a user is authenticated, and lets your function take
 action, such as logging\n" +
  "the outcome.")
 err := runner.cognitoActor.UpdateTriggers(
  ctx, userPoolId,
  actions.TriggerInfo{Trigger: actions.PostAuthentication, HandlerArn:
 aws.String(activityLogArn)})
 if err != nil {
  panic(err)
 }
 runner.resources.triggers = append(runner.resources.triggers,
 actions.PostAuthentication)
 log.Printf("Lambda function %v added to user pool %v to handle PostAuthentication
 Cognito trigger.\n",
  activityLogArn, userPoolId)

 log.Println(strings.Repeat("-", 88))
}

// SignInUser signs in as the specified user.
func (runner *ActivityLog) SignInUser(ctx context.Context, clientId string, userName
 string, password string) {
 log.Printf("Now we'll sign in user %v and check the results in the logs and the
 DynamoDB table.", userName)
 runner.questioner.Ask("Press Enter when you're ready.")
 authResult, err := runner.cognitoActor.SignIn(ctx, clientId, userName, password)
```

```
 if err != nil {
  panic(err)
 }
 log.Println("Sign in successful.",
  "The PostAuthentication Lambda handler writes custom information to CloudWatch
 Logs.")

 runner.resources.userAccessTokens = append(runner.resources.userAccessTokens,
 *authResult.AccessToken)
}

// GetKnownUserLastLogin gets the login info for a user from the Amazon DynamoDB
 table and displays it.
func (runner *ActivityLog) GetKnownUserLastLogin(ctx context.Context, tableName
 string, userName string) {
 log.Println("The PostAuthentication handler also writes login data to the DynamoDB
 table.")
 runner.questioner.Ask("Press Enter when you're ready to continue.")
 users, err := runner.helper.GetKnownUsers(ctx, tableName)
 if err != nil {
  panic(err)
 }
 for _, user := range users.Users {
  if user.UserName == userName {
   log.Println("The last login info for the user in the known users table is:")
   log.Printf("\t%+v", *user.LastLogin)
  }
 }
 log.Println(strings.Repeat("-", 88))
}

// Run runs the scenario.
func (runner *ActivityLog) Run(ctx context.Context, stackName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   runner.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome\n")

 log.Println(strings.Repeat("-", 88))
```

```
 stackOutputs, err := runner.helper.GetStackOutputs(ctx, stackName)
 if err != nil {
  panic(err)
 }
 runner.resources.userPoolId = stackOutputs["UserPoolId"]
 runner.helper.PopulateUserTable(ctx, stackOutputs["TableName"])
 userName, password := runner.AddUserToPool(ctx, stackOutputs["UserPoolId"],
 stackOutputs["TableName"])

 runner.AddActivityLogTrigger(ctx, stackOutputs["UserPoolId"],
 stackOutputs["ActivityLogFunctionArn"])
 runner.SignInUser(ctx, stackOutputs["UserPoolClientId"], userName, password)
 runner.helper.ListRecentLogEvents(ctx, stackOutputs["ActivityLogFunction"])
 runner.GetKnownUserLastLogin(ctx, stackOutputs["TableName"], userName)

 runner.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

Lambda 関数を使用して PostAuthentication トリガーを処理します。

```
import (
 "context"
 "fmt"
 "log"
 "os"
 "time"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 dynamodbtypes "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)
```

```
const TABLE_NAME = "TABLE_NAME"

// LoginInfo defines structured login data that can be marshalled to a DynamoDB
 format.
type LoginInfo struct {
 UserPoolId string `dynamodbav:"UserPoolId"`
 ClientId   string `dynamodbav:"ClientId"`
 Time       string `dynamodbav:"Time"`
}

// UserInfo defines structured user data that can be marshalled to a DynamoDB
 format.
type UserInfo struct {
 UserName  string    `dynamodbav:"UserName"`
 UserEmail string    `dynamodbav:"UserEmail"`
 LastLogin LoginInfo `dynamodbav:"LastLogin"`
}

// GetKey marshals the user email value to a DynamoDB key format.
func (user UserInfo) GetKey() map[string]dynamodbtypes.AttributeValue {
 userEmail, err := attributevalue.Marshal(user.UserEmail)
 if err != nil {
  panic(err)
 }
 return map[string]dynamodbtypes.AttributeValue{"UserEmail": userEmail}
}

type handler struct {
 dynamoClient *dynamodb.Client
}

// HandleRequest handles the PostAuthentication event by writing custom data to the
 logs and
// to an Amazon DynamoDB table.
func (h *handler) HandleRequest(ctx context.Context,
 event events.CognitoEventUserPoolsPostAuthentication)
 (events.CognitoEventUserPoolsPostAuthentication, error) {
 log.Printf("Received post authentication trigger from %v for user '%v'",
 event.TriggerSource, event.UserName)
 tableName := os.Getenv(TABLE_NAME)
 user := UserInfo{
  UserName:  event.UserName,
  UserEmail: event.Request.UserAttributes["email"],
```

```
  LastLogin: LoginInfo{
   UserPoolId: event.UserPoolID,
   ClientId:   event.CallerContext.ClientID,
   Time:       time.Now().Format(time.UnixDate),
  },
 }
 // Write to CloudWatch Logs.
 fmt.Printf("%#v", user)

 // Also write to an external system. This examples uses DynamoDB to demonstrate.
 userMap, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshal to DynamoDB map. Here's why: %v\n", err)
 } else if len(userMap) == 0 {
  log.Printf("User info marshaled to an empty map.")
 } else {
  _, err := h.dynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
   Item:      userMap,
   TableName: aws.String(tableName),
  })
  if err != nil {
   log.Printf("Couldn't write to DynamoDB. Here's why: %v\n", err)
  } else {
   log.Printf("Wrote user info to DynamoDB table %v.\n", tableName)
  }
 }

 return event, nil
}

func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Panicln(err)
 }
 h := handler{
  dynamoClient: dynamodb.NewFromConfig(sdkConfig),
 }
 lambda.Start(h.HandleRequest)
}
```

一般的なタスクを実行する構造体を作成します。

```
import (
 "context"
 "log"
 "strings"
 "time"
 "user_pools_and_lambda_triggers/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// IScenarioHelper defines common functions used by the workflows in this example.
type IScenarioHelper interface {
 Pause(secs int)
 GetStackOutputs(ctx context.Context, stackName string) (actions.StackOutputs,
 error)
 PopulateUserTable(ctx context.Context, tableName string)
 GetKnownUsers(ctx context.Context, tableName string) (actions.UserList, error)
 AddKnownUser(ctx context.Context, tableName string, user actions.User)
 ListRecentLogEvents(ctx context.Context, functionName string)
}

// ScenarioHelper contains AWS wrapper structs used by the workflows in this
 example.
type ScenarioHelper struct {
 questioner  demotools.IQuestioner
 dynamoActor *actions.DynamoActions
 cfnActor    *actions.CloudFormationActions
 cwlActor    *actions.CloudWatchLogsActions
 isTestRun   bool
}

// NewScenarioHelper constructs a new scenario helper.
func NewScenarioHelper(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ScenarioHelper {
 scenario := ScenarioHelper{
  questioner:  questioner,
```

```
  dynamoActor: &actions.DynamoActions{DynamoClient:
 dynamodb.NewFromConfig(sdkConfig)},
  cfnActor:    &actions.CloudFormationActions{CfnClient:
 cloudformation.NewFromConfig(sdkConfig)},
  cwlActor:    &actions.CloudWatchLogsActions{CwlClient:
 cloudwatchlogs.NewFromConfig(sdkConfig)},
 }
 return scenario
}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 if !helper.isTestRun {
  time.Sleep(time.Duration(secs) * time.Second)
 }
}

// GetStackOutputs gets the outputs from the specified CloudFormation stack in a
 structured format.
func (helper ScenarioHelper) GetStackOutputs(ctx context.Context, stackName string)
 (actions.StackOutputs, error) {
 return helper.cfnActor.GetOutputs(ctx, stackName), nil
}

// PopulateUserTable fills the known user table with example data.
func (helper ScenarioHelper) PopulateUserTable(ctx context.Context, tableName
 string) {
 log.Printf("First, let's add some users to the DynamoDB %v table we'll use for this
 example.\n", tableName)
 err := helper.dynamoActor.PopulateTable(ctx, tableName)
 if err != nil {
  panic(err)
 }
}

// GetKnownUsers gets the users from the known users table in a structured format.
func (helper ScenarioHelper) GetKnownUsers(ctx context.Context, tableName string)
 (actions.UserList, error) {
 knownUsers, err := helper.dynamoActor.Scan(ctx, tableName)
 if err != nil {
  log.Printf("Couldn't get known users from table %v. Here's why: %v\n", tableName,
 err)
 }
 return knownUsers, err
```

```
}

// AddKnownUser adds a user to the known users table.
func (helper ScenarioHelper) AddKnownUser(ctx context.Context, tableName string,
 user actions.User) {
 log.Printf("Adding user '%v' with email '%v' to the DynamoDB known users table...
\n",
  user.UserName, user.UserEmail)
 err := helper.dynamoActor.AddUser(ctx, tableName, user)
 if err != nil {
  panic(err)
 }
}

// ListRecentLogEvents gets the most recent log stream and events for the specified
 Lambda function and displays them.
func (helper ScenarioHelper) ListRecentLogEvents(ctx context.Context, functionName
 string) {
 log.Println("Waiting a few seconds to let Lambda write to CloudWatch Logs...")
 helper.Pause(10)
 log.Println("Okay, let's check the logs to find what's happened recently with your
 Lambda function.")
 logStream, err := helper.cwlActor.GetLatestLogStream(ctx, functionName)
 if err != nil {
  panic(err)
 }
 log.Printf("Getting some recent events from log stream %v\n",
 *logStream.LogStreamName)
 events, err := helper.cwlActor.GetLogEvents(ctx, functionName,
 *logStream.LogStreamName, 10)
 if err != nil {
  panic(err)
 }
 for _, event := range events {
  log.Printf("\t%v", *event.Message)
 }
 log.Println(strings.Repeat("-", 88))
}
```

Amazon Cognito アクションをラップする構造体を作成します。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider"
 "github.com/aws/aws-sdk-go-v2/service/cognitoidentityprovider/types"
)

type CognitoActions struct {
 CognitoClient *cognitoidentityprovider.Client
}



// Trigger and TriggerInfo define typed data for updating an Amazon Cognito trigger.
type Trigger int

const (
 PreSignUp Trigger = iota
 UserMigration
 PostAuthentication
)

type TriggerInfo struct {
 Trigger    Trigger
 HandlerArn *string
}

// UpdateTriggers adds or removes Lambda triggers for a user pool. When a trigger is
 specified with a `nil` value,
// it is removed from the user pool.
func (actor CognitoActions) UpdateTriggers(ctx context.Context, userPoolId string,
 triggers ...TriggerInfo) error {
 output, err := actor.CognitoClient.DescribeUserPool(ctx,
 &cognitoidentityprovider.DescribeUserPoolInput{
  UserPoolId: aws.String(userPoolId),
 })
 if err != nil {
  log.Printf("Couldn't get info about user pool %v. Here's why: %v\n", userPoolId,
 err)
```

```
  return err
 }
 lambdaConfig := output.UserPool.LambdaConfig
 for _, trigger := range triggers {
  switch trigger.Trigger {
  case PreSignUp:
   lambdaConfig.PreSignUp = trigger.HandlerArn
  case UserMigration:
   lambdaConfig.UserMigration = trigger.HandlerArn
  case PostAuthentication:
   lambdaConfig.PostAuthentication = trigger.HandlerArn
  }
 }
 _, err = actor.CognitoClient.UpdateUserPool(ctx,
 &cognitoidentityprovider.UpdateUserPoolInput{
  UserPoolId:   aws.String(userPoolId),
  LambdaConfig: lambdaConfig,
 })
 if err != nil {
  log.Printf("Couldn't update user pool %v. Here's why: %v\n", userPoolId, err)
 }
 return err
}



// SignUp signs up a user with Amazon Cognito.
func (actor CognitoActions) SignUp(ctx context.Context, clientId string, userName
 string, password string, userEmail string) (bool, error) {
 confirmed := false
 output, err := actor.CognitoClient.SignUp(ctx,
 &cognitoidentityprovider.SignUpInput{
  ClientId: aws.String(clientId),
  Password: aws.String(password),
  Username: aws.String(userName),
  UserAttributes: []types.AttributeType{
   {Name: aws.String("email"), Value: aws.String(userEmail)},
  },
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
```

```
   log.Printf("Couldn't sign up user %v. Here's why: %v\n", userName, err)
  }
 } else {
  confirmed = output.UserConfirmed
 }
 return confirmed, err
}



// SignIn signs in a user to Amazon Cognito using a username and password
 authentication flow.
func (actor CognitoActions) SignIn(ctx context.Context, clientId string, userName
 string, password string) (*types.AuthenticationResultType, error) {
 var authResult *types.AuthenticationResultType
 output, err := actor.CognitoClient.InitiateAuth(ctx,
 &cognitoidentityprovider.InitiateAuthInput{
  AuthFlow:       "USER_PASSWORD_AUTH",
  ClientId:       aws.String(clientId),
  AuthParameters: map[string]string{"USERNAME": userName, "PASSWORD": password},
 })
 if err != nil {
  var resetRequired *types.PasswordResetRequiredException
  if errors.As(err, &resetRequired) {
   log.Println(*resetRequired.Message)
  } else {
   log.Printf("Couldn't sign in user %v. Here's why: %v\n", userName, err)
  }
 } else {
  authResult = output.AuthenticationResult
 }
 return authResult, err
}



// ForgotPassword starts a password recovery flow for a user. This flow typically
 sends a confirmation code
// to the user's configured notification destination, such as email.
func (actor CognitoActions) ForgotPassword(ctx context.Context, clientId string,
 userName string) (*types.CodeDeliveryDetailsType, error) {
 output, err := actor.CognitoClient.ForgotPassword(ctx,
 &cognitoidentityprovider.ForgotPasswordInput{
  ClientId: aws.String(clientId),
```

```
  Username: aws.String(userName),
 })
 if err != nil {
  log.Printf("Couldn't start password reset for user '%v'. Here;s why: %v\n",
 userName, err)
 }
 return output.CodeDeliveryDetails, err
}



// ConfirmForgotPassword confirms a user with a confirmation code and a new
 password.
func (actor CognitoActions) ConfirmForgotPassword(ctx context.Context, clientId
 string, code string, userName string, password string) error {
 _, err := actor.CognitoClient.ConfirmForgotPassword(ctx,
 &cognitoidentityprovider.ConfirmForgotPasswordInput{
  ClientId:         aws.String(clientId),
  ConfirmationCode: aws.String(code),
  Password:         aws.String(password),
  Username:         aws.String(userName),
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't confirm user %v. Here's why: %v", userName, err)
  }
 }
 return err
}



// DeleteUser removes a user from the user pool.
func (actor CognitoActions) DeleteUser(ctx context.Context, userAccessToken string)
 error {
 _, err := actor.CognitoClient.DeleteUser(ctx,
 &cognitoidentityprovider.DeleteUserInput{
  AccessToken: aws.String(userAccessToken),
 })
 if err != nil {
  log.Printf("Couldn't delete user. Here's why: %v\n", err)
```

```
 }
 return err
}



// AdminCreateUser uses administrator credentials to add a user to a user pool. This
 method leaves the user
// in a state that requires they enter a new password next time they sign in.
func (actor CognitoActions) AdminCreateUser(ctx context.Context, userPoolId string,
 userName string, userEmail string) error {
 _, err := actor.CognitoClient.AdminCreateUser(ctx,
 &cognitoidentityprovider.AdminCreateUserInput{
  UserPoolId:     aws.String(userPoolId),
  Username:       aws.String(userName),
  MessageAction:  types.MessageActionTypeSuppress,
  UserAttributes: []types.AttributeType{{Name: aws.String("email"), Value:
 aws.String(userEmail)}},
 })
 if err != nil {
  var userExists *types.UsernameExistsException
  if errors.As(err, &userExists) {
   log.Printf("User %v already exists in the user pool.", userName)
   err = nil
  } else {
   log.Printf("Couldn't create user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}



// AdminSetUserPassword uses administrator credentials to set a password for a user
 without requiring a
// temporary password.
func (actor CognitoActions) AdminSetUserPassword(ctx context.Context, userPoolId
 string, userName string, password string) error {
 _, err := actor.CognitoClient.AdminSetUserPassword(ctx,
 &cognitoidentityprovider.AdminSetUserPasswordInput{
  Password:   aws.String(password),
  UserPoolId: aws.String(userPoolId),
  Username:   aws.String(userName),
  Permanent:  true,
```

```
 })
 if err != nil {
  var invalidPassword *types.InvalidPasswordException
  if errors.As(err, &invalidPassword) {
   log.Println(*invalidPassword.Message)
  } else {
   log.Printf("Couldn't set password for user %v. Here's why: %v\n", userName, err)
  }
 }
 return err
}
```

DynamoDB アクションをラップする構造体を作成します。

```
import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/dynamodb/attributevalue"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb"
 "github.com/aws/aws-sdk-go-v2/service/dynamodb/types"
)

// DynamoActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type DynamoActions struct {
 DynamoClient *dynamodb.Client
}

// User defines structured user data.
type User struct {
 UserName  string
 UserEmail string
 LastLogin *LoginInfo `dynamodbav:",omitempty"`
}

// LoginInfo defines structured custom login data.
```

```
type LoginInfo struct {
 UserPoolId string
 ClientId   string
 Time       string
}

// UserList defines a list of users.
type UserList struct {
 Users []User
}

// UserNameList returns the usernames contained in a UserList as a list of strings.
func (users *UserList) UserNameList() []string {
 names := make([]string, len(users.Users))
 for i := 0; i < len(users.Users); i++ {
  names[i] = users.Users[i].UserName
 }
 return names
}

// PopulateTable adds a set of test users to the table.
func (actor DynamoActions) PopulateTable(ctx context.Context, tableName string)
 error {
 var err error
 var item map[string]types.AttributeValue
 var writeReqs []types.WriteRequest
 for i := 1; i < 4; i++ {
  item, err = attributevalue.MarshalMap(User{UserName: fmt.Sprintf("test_user_%v",
 i), UserEmail: fmt.Sprintf("test_email_%v@example.com", i)})
  if err != nil {
   log.Printf("Couldn't marshall user into DynamoDB format. Here's why: %v\n", err)
   return err
  }
  writeReqs = append(writeReqs, types.WriteRequest{PutRequest:
 &types.PutRequest{Item: item}})
 }
 _, err = actor.DynamoClient.BatchWriteItem(ctx, &dynamodb.BatchWriteItemInput{
  RequestItems: map[string][]types.WriteRequest{tableName: writeReqs},
 })
 if err != nil {
  log.Printf("Couldn't populate table %v with users. Here's why: %v\n", tableName,
 err)
 }
 return err
```

```
}

// Scan scans the table for all items.
func (actor DynamoActions) Scan(ctx context.Context, tableName string) (UserList,
 error) {
 var userList UserList
 output, err := actor.DynamoClient.Scan(ctx, &dynamodb.ScanInput{
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't scan table %v for items. Here's why: %v\n", tableName, err)
 } else {
  err = attributevalue.UnmarshalListOfMaps(output.Items, &userList.Users)
  if err != nil {
   log.Printf("Couldn't unmarshal items into users. Here's why: %v\n", err)
  }
 }
 return userList, err
}

// AddUser adds a user item to a table.
func (actor DynamoActions) AddUser(ctx context.Context, tableName string, user User)
 error {
 userItem, err := attributevalue.MarshalMap(user)
 if err != nil {
  log.Printf("Couldn't marshall user to item. Here's why: %v\n", err)
 }
 _, err = actor.DynamoClient.PutItem(ctx, &dynamodb.PutItemInput{
  Item:      userItem,
  TableName: aws.String(tableName),
 })
 if err != nil {
  log.Printf("Couldn't put item in table %v. Here's why: %v", tableName, err)
 }
 return err
}
```

CloudWatch Logs アクションをラップする構造体を作成します。

```
import (
```

```
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs"
 "github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs/types"
)

type CloudWatchLogsActions struct {
 CwlClient *cloudwatchlogs.Client
}

// GetLatestLogStream gets the most recent log stream for a Lambda function.
func (actor CloudWatchLogsActions) GetLatestLogStream(ctx context.Context,
 functionName string) (types.LogStream, error) {
 var logStream types.LogStream
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.DescribeLogStreams(ctx,
 &cloudwatchlogs.DescribeLogStreamsInput{
  Descending:   aws.Bool(true),
  Limit:        aws.Int32(1),
  LogGroupName: aws.String(logGroupName),
  OrderBy:      types.OrderByLastEventTime,
 })
 if err != nil {
  log.Printf("Couldn't get log streams for log group %v. Here's why: %v\n",
 logGroupName, err)
 } else {
  logStream = output.LogStreams[0]
 }
 return logStream, err
}

// GetLogEvents gets the most recent eventCount events from the specified log
 stream.
func (actor CloudWatchLogsActions) GetLogEvents(ctx context.Context, functionName
 string, logStreamName string, eventCount int32) (
 []types.OutputLogEvent, error) {
 var events []types.OutputLogEvent
 logGroupName := fmt.Sprintf("/aws/lambda/%s", functionName)
 output, err := actor.CwlClient.GetLogEvents(ctx, &cloudwatchlogs.GetLogEventsInput{
  LogStreamName: aws.String(logStreamName),
  Limit:         aws.Int32(eventCount),
```

```
  LogGroupName:  aws.String(logGroupName),
 })
 if err != nil {
  log.Printf("Couldn't get log event for log stream %v. Here's why: %v\n",
 logStreamName, err)
 } else {
  events = output.Events
 }
 return events, err
}
```

CloudFormation アクションをラップする構造体を作成します。

```
import (
 "context"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/cloudformation"
)

// StackOutputs defines a map of outputs from a specific stack.
type StackOutputs map[string]string

type CloudFormationActions struct {
 CfnClient *cloudformation.Client
}

// GetOutputs gets the outputs from a CloudFormation stack and puts them into a
 structured format.
func (actor CloudFormationActions) GetOutputs(ctx context.Context, stackName string)
 StackOutputs {
 output, err := actor.CfnClient.DescribeStacks(ctx,
 &cloudformation.DescribeStacksInput{
  StackName: aws.String(stackName),
 })
 if err != nil || len(output.Stacks) == 0 {
  log.Panicf("Couldn't find a CloudFormation stack named %v. Here's why: %v\n",
 stackName, err)
 }
```

```
 stackOutputs := StackOutputs{}
 for _, out := range output.Stacks[0].Outputs {
  stackOutputs[*out.OutputKey] = *out.OutputValue
 }
 return stackOutputs
}
```

リソースをクリーンアップします。

```
import (
 "context"
 "log"
 "user_pools_and_lambda_triggers/actions"

 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 userPoolId       string
 userAccessTokens []string
 triggers         []actions.Trigger

 cognitoActor *actions.CognitoActions
 questioner   demotools.IQuestioner
}

func (resources *Resources) init(cognitoActor *actions.CognitoActions, questioner
 demotools.IQuestioner) {
 resources.userAccessTokens = []string{}
 resources.triggers = []actions.Trigger{}
 resources.cognitoActor = cognitoActor
 resources.questioner = questioner
}

// Cleanup deletes all AWS resources created during an example.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
```

```
    log.Printf("Something went wrong during cleanup.\n%v\n", r)
    log.Println("Use the AWS Management Console to remove any remaining resources \n"
  +
     "that were created for this scenario.")
   }
  }()

  wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
  resources that were created "+
   "during this demo (y/n)?", "y")
  if wantDelete {
   for _, accessToken := range resources.userAccessTokens {
    err := resources.cognitoActor.DeleteUser(ctx, accessToken)
    if err != nil {
     log.Println("Couldn't delete user during cleanup.")
     panic(err)
    }
    log.Println("Deleted user.")
   }
   triggerList := make([]actions.TriggerInfo, len(resources.triggers))
   for i := 0; i < len(resources.triggers); i++ {
    triggerList[i] = actions.TriggerInfo{Trigger: resources.triggers[i], HandlerArn:
  nil}
   }
   err := resources.cognitoActor.UpdateTriggers(ctx, resources.userPoolId,
  triggerList...)
   if err != nil {
    log.Println("Couldn't update Cognito triggers during cleanup.")
    panic(err)
   }
   log.Println("Removed Cognito triggers from user pool.")
  } else {
   log.Println("Be sure to remove resources when you're done with them to avoid
  unexpected charges!")
  }
 }
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - AdminCreateUser

- AdminSetUserPassword
- DeleteUser
- InitiateAuth
- UpdateUserPool

サーバーレスサンプル

Lambda 関数での Amazon RDS データベースへの接続

次のコード例は、RDS データベースに接続する Lambda 関数を実装する方法を示しています。この関数は、シンプルなデータベースリクエストを実行し、結果を返します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda 関数での Amazon RDS データベースへの接続

```
/*
Golang v2 code here.
*/

package main

import (
 "context"
 "database/sql"
 "encoding/json"
 "fmt"
 "os"

 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/rds/auth"
 _ "github.com/go-sql-driver/mysql"
)
```

```
type MyEvent struct {
 Name string `json:"name"`
}

func HandleRequest(event *MyEvent) (map[string]interface{}, error) {

 var dbName string = os.Getenv("DatabaseName")
 var dbUser string = os.Getenv("DatabaseUser")
 var dbHost string = os.Getenv("DBHost") // Add hostname without https
 var dbPort int = os.Getenv("Port")      // Add port number
 var dbEndpoint string = fmt.Sprintf("%s:%d", dbHost, dbPort)
 var region string = os.Getenv("AWS_REGION")

 cfg, err := config.LoadDefaultConfig(context.TODO())
 if err != nil {
  panic("configuration error: " + err.Error())
 }

 authenticationToken, err := auth.BuildAuthToken(
  context.TODO(), dbEndpoint, region, dbUser, cfg.Credentials)
 if err != nil {
  panic("failed to create authentication token: " + err.Error())
 }

 dsn := fmt.Sprintf("%s:%s@tcp(%s)/%s?tls=true&allowCleartextPasswords=true",
  dbUser, authenticationToken, dbEndpoint, dbName,
 )

 db, err := sql.Open("mysql", dsn)
 if err != nil {
  panic(err)
 }

 defer db.Close()

 var sum int
 err = db.QueryRow("SELECT ?+? AS sum", 3, 2).Scan(&sum)
 if err != nil {
  panic(err)
 }
 s := fmt.Sprint(sum)
 message := fmt.Sprintf("The selected sum is: %s", s)
```

```
 messageBytes, err := json.Marshal(message)
 if err != nil {
  return nil, err
 }

 messageString := string(messageBytes)
 return map[string]interface{}{
  "statusCode": 200,
  "headers":    map[string]string{"Content-Type": "application/json"},
  "body":       messageString,
 }, nil
}

func main() {
 lambda.Start(HandleRequest)
}
```

Kinesis トリガーから Lambda 関数を呼び出す

次のコード例では、Kinesis ストリームからレコードを受信することによってトリガーされるイベントを受け取る、Lambda 関数の実装方法を示しています。この関数は Kinesis ペイロードを取得し、それを Base64 からデコードして、そのレコードの内容をログ記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda での Kinesis イベントの消費。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "log"
```

```
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, kinesisEvent events.KinesisEvent) error {
 if len(kinesisEvent.Records) == 0 {
  log.Printf("empty Kinesis event received")
  return nil
 }

 for _, record := range kinesisEvent.Records {
  log.Printf("processed Kinesis event with EventId: %v", record.EventID)
  recordDataBytes := record.Kinesis.Data
  recordDataText := string(recordDataBytes)
  log.Printf("record data: %v", recordDataText)
  // TODO: Do interesting work based on the new data
 }
 log.Printf("successfully processed %v records", len(kinesisEvent.Records))
 return nil
}

func main() {
 lambda.Start(handler)
}
```

DynamoDB トリガーから Lambda 関数を呼び出す

次のコード例は、DynamoDB ストリームからレコードを受信することによってトリガーされるイベントを受け取る、Lambda 関数の実装方法を示しています。関数は DynamoDB ペイロードを取得し、レコードの内容を口グ記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用して Lambda で DynamoDB イベントの消費。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-lambda-go/events"
 "fmt"
)

func HandleRequest(ctx context.Context, event events.DynamoDBEvent) (*string, error)
 {
 if len(event.Records) == 0 {
  return nil, fmt.Errorf("received empty event")
 }

 for _, record := range event.Records {
   LogDynamoDBRecord(record)
 }

 message := fmt.Sprintf("Records processed: %d", len(event.Records))
 return &message, nil
}

func main() {
 lambda.Start(HandleRequest)
}

func LogDynamoDBRecord(record events.DynamoDBEventRecord){
 fmt.Println(record.EventID)
 fmt.Println(record.EventName)
 fmt.Printf("%+v\n", record.Change)
}
```

Amazon DocumentDB トリガーから Lambda 関数を呼び出す

次のコードの例は、DocumentDB 変更ストリームからレコードを受信することによってトリガーされるイベントを受け取る、Lambda 関数の実装方法を示しています。関数は DocumentDB ペイロードを取得し、レコードの内容をログ記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用して Lambda で Amazon DocumentDB イベントの消費。

```
package main

import (
 "context"
 "encoding/json"
 "fmt"

 "github.com/aws/aws-lambda-go/lambda"
)

type Event struct {
 Events []Record `json:"events"`
}

type Record struct {
 Event struct {
  OperationType string `json:"operationType"`
  NS            struct {
   DB   string `json:"db"`
   Coll string `json:"coll"`
  } `json:"ns"`
  FullDocument interface{} `json:"fullDocument"`
 } `json:"event"`
}

func main() {
 lambda.Start(handler)
}

func handler(ctx context.Context, event Event) (string, error) {
 fmt.Println("Loading function")
 for _, record := range event.Events {
```

```
  logDocumentDBEvent(record)
 }

 return "OK", nil
}

func logDocumentDBEvent(record Record) {
 fmt.Printf("Operation type: %s\n", record.Event.OperationType)
 fmt.Printf("db: %s\n", record.Event.NS.DB)
 fmt.Printf("collection: %s\n", record.Event.NS.Coll)
 docBytes, _ := json.MarshalIndent(record.Event.FullDocument, "", "  ")
 fmt.Printf("Full document: %s\n", string(docBytes))
}
```

Amazon MSK トリガーから Lambda 関数を呼び出す

次のコード例は、Amazon MSK クラスターからレコードを受信することによってトリガーされるイベントを受け取る、Lambda 関数の実装方法を示しています。関数は MSK ペイロードを取得し、レコードの内容を口グ記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda での Amazon MSK イベントの消費。

```
package main

import (
 "encoding/base64"
 "fmt"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)
```

```
func handler(event events.KafkaEvent) {
 for key, records := range event.Records {
  fmt.Println("Key:", key)

  for _, record := range records {
   fmt.Println("Record:", record)

   decodedValue, _ := base64.StdEncoding.DecodeString(record.Value)
   message := string(decodedValue)
   fmt.Println("Message:", message)
  }
 }
}

func main() {
 lambda.Start(handler)
}
```

Amazon S3 トリガーから Lambda 関数を呼び出す

次のコード例は、S3 バケットにオブジェクトをアップロードすることによってトリガーされるイベントを受け取る Lambda 関数を実装する方法を示しています。この関数は、イベントパラメータから S3 バケット名とオブジェクトキーを取得し、Amazon S3 API を呼び出してオブジェクトのコンテンツタイプを取得してログに記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を検索し、設定および実行の方法を確認してください。

Go を使用して Lambda で S3 イベントの消費。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
```

```
 "context"
 "log"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/s3"
)

func handler(ctx context.Context, s3Event events.S3Event) error {
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Printf("failed to load default config: %s", err)
  return err
 }
 s3Client := s3.NewFromConfig(sdkConfig)

 for _, record := range s3Event.Records {
  bucket := record.S3.Bucket.Name
  key := record.S3.Object.URLDecodedKey
  headOutput, err := s3Client.HeadObject(ctx, &s3.HeadObjectInput{
   Bucket: &bucket,
   Key:    &key,
  })
  if err != nil {
   log.Printf("error getting head of object %s/%s: %s", bucket, key, err)
   return err
  }
  log.Printf("successfully retrieved %s/%s of type %s", bucket, key,
 *headOutput.ContentType)
 }

 return nil
}

func main() {
 lambda.Start(handler)
}
```

Amazon SNS トリガーから Lambda 関数を呼び出す

次のコード例は、SNS トピックからメッセージを受信することによってトリガーされるイベントを受け取る Lambda 関数を実装する方法を示しています。この関数はイベントパラメータからメッセージを取得し、各メッセージの内容を記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用して Lambda で SNS イベントの消費。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, snsEvent events.SNSEvent) {
 for _, record := range snsEvent.Records {
  processMessage(record)
 }
 fmt.Println("done")
}

func processMessage(record events.SNSEventRecord) {
 message := record.SNS.Message
 fmt.Printf("Processed message: %s\n", message)
 // TODO: Process your record here
}

func main() {
```

```
 lambda.Start(handler)
}
```

Amazon SQS トリガーから Lambda 関数を呼び出す

次のコード例では、SQS キューからメッセージを受信することによってトリガーされるイベントを受け取る、Lambda 関数の実装方法を示しています。この関数はイベントパラメータからメッセージを取得し、各メッセージの内容を記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda での SQS イベントの消費。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package integration_sqs_to_lambda

import (
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(event events.SQSEvent) error {
 for _, record := range event.Records {
  err := processMessage(record)
  if err != nil {
   return err
  }
 }
 fmt.Println("done")
 return nil
}
```

```
func processMessage(record events.SQSMessage) error {
 fmt.Printf("Processed message %s\n", record.Body)
 // TODO: Do interesting work based on the new message
 return nil
}

func main() {
 lambda.Start(handler)
}
```

Kinesis トリガーを使用した Lambda 関数でのバッチアイテム失敗のレポート

以下のコード例では、Kinesis ストリームからイベントを受け取る Lambda 関数のための、部分的なバッチレスポンスの実装方法を示しています。この関数は、レスポンスとしてバッチアイテムの失敗を報告し、対象のメッセージを後で再試行するよう Lambda に伝えます。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda での Kinesis バッチアイテム失敗のレポート。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, kinesisEvent events.KinesisEvent)
 (map[string]interface{}, error) {
 batchItemFailures := []map[string]interface{}{}
```

```
 for _, record := range kinesisEvent.Records {
  curRecordSequenceNumber := ""

  // Process your record
  if /* Your record processing condition here */ {
   curRecordSequenceNumber = record.Kinesis.SequenceNumber
  }

  // Add a condition to check if the record processing failed
  if curRecordSequenceNumber != "" {
   batchItemFailures = append(batchItemFailures, map[string]interface{}
{"itemIdentifier": curRecordSequenceNumber})
  }
 }

 kinesisBatchResponse := map[string]interface{}{
  "batchItemFailures": batchItemFailures,
 }
 return kinesisBatchResponse, nil
}

func main() {
 lambda.Start(handler)
}
```

DynamoDB トリガーで Lambda 関数のバッチアイテムの失敗をレポートする

次のコード例は、DynamoDB ストリームからイベントを受け取る Lambda 関数の部分的なバッチレスポンスの実装方法を示しています。この関数は、レスポンスとしてバッチアイテムの失敗を報告し、対象のメッセージを後で再試行するよう Lambda に伝えます。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用して Lambda で DynamoDB のバッチアイテム失敗のレポート。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

type BatchItemFailure struct {
 ItemIdentifier string `json:"ItemIdentifier"`
}

type BatchResult struct {
 BatchItemFailures []BatchItemFailure `json:"BatchItemFailures"`
}

func HandleRequest(ctx context.Context, event events.DynamoDBEvent) (*BatchResult,
 error) {
 var batchItemFailures []BatchItemFailure
 curRecordSequenceNumber := ""

 for _, record := range event.Records {
  // Process your record
  curRecordSequenceNumber = record.Change.SequenceNumber
 }

 if curRecordSequenceNumber != "" {
  batchItemFailures = append(batchItemFailures, BatchItemFailure{ItemIdentifier:
 curRecordSequenceNumber})
 }

 batchResult := BatchResult{
  BatchItemFailures: batchItemFailures,
 }

 return &batchResult, nil
}

func main() {
 lambda.Start(HandleRequest)
```

```
}
```

Amazon SQS トリガーを使用した Lambda 関数でのバッチアイテム失敗のレポート

以下のコード例では、SQS キューからイベントを受け取る Lambda 関数のための、部分的なバッチレスポンスの実装方法を示しています。この関数は、レスポンスとしてバッチアイテムの失敗を報告し、対象のメッセージを後で再試行するよう Lambda に伝えます。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda での SQS バッチアイテム失敗のレポート。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, sqsEvent events.SQSEvent) (map[string]interface{},
 error) {
 batchItemFailures := []map[string]interface{}{}

 for _, message := range sqsEvent.Records {
  if len(message.Body) > 0 {
   // Your message processing condition here
   fmt.Printf("Successfully processed message: %s\n", message.Body)
  } else {
   // Message processing failed
   fmt.Printf("Failed to process message %s\n", message.MessageId)
```

```
   batchItemFailures = append(batchItemFailures, map[string]interface{}
{"itemIdentifier": message.MessageId})
  }
 }

 sqsBatchResponse := map[string]interface{}{
  "batchItemFailures": batchItemFailures,
 }
 return sqsBatchResponse, nil
}

func main() {
 lambda.Start(handler)
}
```

AWS コミュニティへの貢献

サーバーレスアプリケーションの構築とテスト

次のコード例は、Lambda および DynamoDB を備えた API Gateway を使用してサーバーレスアプリケーションを構築およびテストする方法を示しています。

SDK for Go V2

Go SDK を使用し、Lambda および DynamoDB を備えた API Gateway で構成されるサーバーレスアプリケーションを構築およびテストする方法が示されます。

完全なソースコードとセットアップおよび実行の手順については、GitHub で完全な例を参照してください。

この例で使用されているサービス

- API ゲートウェイ
- DynamoDB
- Lambda

SDK for Go V2 を使用した Amazon MSK の例

次のコード例は、Amazon MSK で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- サーバーレスサンプル

サーバーレスサンプル

Amazon MSK トリガーから Lambda 関数を呼び出す

次のコード例は、Amazon MSK クラスターからレコードを受信することによってトリガーされるイベントを受け取る、Lambda 関数の実装方法を示しています。関数は MSK ペイロードを取得し、レコードの内容を口グ記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda での Amazon MSK イベントの消費。

```
package main

import (
 "encoding/base64"
 "fmt"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)
```

```
func handler(event events.KafkaEvent) {
 for key, records := range event.Records {
  fmt.Println("Key:", key)

  for _, record := range records {
   fmt.Println("Record:", record)

   decodedValue, _ := base64.StdEncoding.DecodeString(record.Value)
   message := string(decodedValue)
   fmt.Println("Message:", message)
  }
 }
}

func main() {
 lambda.Start(handler)
}
```

SDK for Go V2 を使用したパートナーセントラルのコード例

次のコード例は、 Partner Central で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

各例には完全なソースコードへのリンクが含まれており、コードの設定方法と実行方法に関する手順を確認できます。

トピック

- アクション

アクション

`GetOpportunity`

次のコード例は、`GetOpportunity` を使用する方法を示しています。

SDK for Go V2

オポチュニティを取得します。

```
package main

import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/partnercentralselling"
)

func main() {
 config, err := config.LoadDefaultConfig(context.TODO())

 if err != nil {
  log.Fatal(err)
 }

 config.Region = "us-east-1"

 client := partnercentralselling.NewFromConfig(config)

 output, err := client.GetOpportunity(context.TODO(),
 &partnercentralselling.GetOpportunityInput{
  Identifier: aws.String("O1111111"),
  Catalog:    aws.String("AWS"),
 })

 if err != nil {
  log.Fatal(err)
 }
 log.Println("printing opportuniy...\n")

 jsonOutput, err := json.MarshalIndent(output, "", "    ")

 fmt.Println(string(jsonOutput))
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「GetOpportunity」を参照してください。

`ListOpportunities`

次のコード例は、`ListOpportunities` を使用する方法を示しています。

SDK for Go V2

オポチュニティを一覧表示します。

```
package main

import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/partnercentralselling"
)

func main() {
 config, err := config.LoadDefaultConfig(context.TODO())

 if err != nil {
  log.Fatal(err)
 }

 config.Region = "us-east-1"

 client := partnercentralselling.NewFromConfig(config)

 output, err := client.ListOpportunities(context.TODO(),
 &partnercentralselling.ListOpportunitiesInput{
  MaxResults: aws.Int32(2),
  Catalog:    aws.String("AWS"),
 })
```

```
 if err != nil {
  log.Fatal(err)
 }

 jsonOutput, err := json.MarshalIndent(output, "", "    ")
 fmt.Println(string(jsonOutput))
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListOpportunities」を参照してください。

SDK for Go V2 を使用した Amazon RDS の例

次のコード例は、Amazon RDS で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

基本 は、重要なオペレーションをサービス内で実行する方法を示すコード例です。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- はじめに
- 基本
- アクション
- サーバーレスサンプル

はじめに

Hello Amazon RDS

次のコード例は、Amazon RDS の使用を開始する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/rds"
)

// main uses the AWS SDK for Go V2 to create an Amazon Relational Database Service
 (Amazon RDS)
// client and list up to 20 DB instances in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 rdsClient := rds.NewFromConfig(sdkConfig)
 const maxInstances = 20
 fmt.Printf("Let's list up to %v DB instances.\n", maxInstances)
 output, err := rdsClient.DescribeDBInstances(ctx,
  &rds.DescribeDBInstancesInput{MaxRecords: aws.Int32(maxInstances)})
 if err != nil {
  fmt.Printf("Couldn't list DB instances: %v\n", err)
  return
```

```
 }
 if len(output.DBInstances) == 0 {
  fmt.Println("No DB instances found.")
 } else {
  for _, instance := range output.DBInstances {
   fmt.Printf("DB instance %v has database %v.\n", *instance.DBInstanceIdentifier,
    *instance.DBName)
  }
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeDBInstances」を参照してください。

基本

基本を学ぶ

次のコード例は、以下の操作方法を示しています。

- カスタム DB パラメータグループを作成し、パラメータ値を設定します。
- パラメータグループを使用するように設定した DB インスタンスを作成します。DB インスタンスにはデータベースも含まれています。
- インスタンスのスナップショットを取得します。
- インスタンスとパラメータグループを削除します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

コマンドプロンプトからインタラクティブなシナリオを実行します。

```
import (
 "context"
 "fmt"
 "log"
 "sort"
 "strconv"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/rds/actions"
 "github.com/google/uuid"
)

// GetStartedInstances is an interactive example that shows you how to use the AWS
 SDK for Go
// with Amazon Relation Database Service (Amazon RDS) to do the following:
//
//  1. Create a custom DB parameter group and set parameter values.
//  2. Create a DB instance that is configured to use the parameter group. The DB
 instance
//     also contains a database.
//  3. Take a snapshot of the DB instance.
//  4. Delete the DB instance and parameter group.
type GetStartedInstances struct {
 sdkConfig  aws.Config
 instances  actions.DbInstances
 questioner demotools.IQuestioner
 helper     IScenarioHelper
 isTestRun  bool
}

// NewGetStartedInstances constructs a GetStartedInstances instance from a
 configuration.
// It uses the specified config to get an Amazon RDS
// client and create wrappers for the actions used in the scenario.
func NewGetStartedInstances(sdkConfig aws.Config, questioner demotools.IQuestioner,
 helper IScenarioHelper) GetStartedInstances {
 rdsClient := rds.NewFromConfig(sdkConfig)
 return GetStartedInstances{
  sdkConfig:  sdkConfig,
```

```
  instances:  actions.DbInstances{RdsClient: rdsClient},
  questioner: questioner,
  helper:     helper,
 }
}

// Run runs the interactive scenario.
func (scenario GetStartedInstances) Run(ctx context.Context, dbEngine string,
 parameterGroupName string,
 instanceName string, dbName string) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon Relational Database Service (Amazon RDS) DB
 Instance demo.")
 log.Println(strings.Repeat("-", 88))

 parameterGroup := scenario.CreateParameterGroup(ctx, dbEngine, parameterGroupName)
 scenario.SetUserParameters(ctx, parameterGroupName)
 instance := scenario.CreateInstance(ctx, instanceName, dbEngine, dbName,
 parameterGroup)
 scenario.DisplayConnection(instance)
 scenario.CreateSnapshot(ctx, instance)
 scenario.Cleanup(ctx, instance, parameterGroup)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}

// CreateParameterGroup shows how to get available engine versions for a specified
// database engine and create a DB parameter group that is compatible with a
// selected engine family.
func (scenario GetStartedInstances) CreateParameterGroup(ctx context.Context,
 dbEngine string,
 parameterGroupName string) *types.DBParameterGroup {

 log.Printf("Checking for an existing DB parameter group named %v.\n",
  parameterGroupName)
```

```
 parameterGroup, err := scenario.instances.GetParameterGroup(ctx,
 parameterGroupName)
 if err != nil {
  panic(err)
 }
 if parameterGroup == nil {
  log.Printf("Getting available database engine versions for %v.\n", dbEngine)
  engineVersions, err := scenario.instances.GetEngineVersions(ctx, dbEngine, "")
  if err != nil {
   panic(err)
  }

  familySet := map[string]struct{}{}
  for _, family := range engineVersions {
   familySet[*family.DBParameterGroupFamily] = struct{}{}
  }
  var families []string
  for family := range familySet {
   families = append(families, family)
  }
  sort.Strings(families)
  familyIndex := scenario.questioner.AskChoice("Which family do you want to use?\n",
 families)
  log.Println("Creating a DB parameter group.")
  _, err = scenario.instances.CreateParameterGroup(
   ctx, parameterGroupName, families[familyIndex], "Example parameter group.")
  if err != nil {
   panic(err)
  }
  parameterGroup, err = scenario.instances.GetParameterGroup(ctx,
 parameterGroupName)
  if err != nil {
   panic(err)
  }
 }
 log.Printf("Parameter group %v:\n", *parameterGroup.DBParameterGroupFamily)
 log.Printf("\tName: %v\n", *parameterGroup.DBParameterGroupName)
 log.Printf("\tARN: %v\n", *parameterGroup.DBParameterGroupArn)
 log.Printf("\tFamily: %v\n", *parameterGroup.DBParameterGroupFamily)
 log.Printf("\tDescription: %v\n", *parameterGroup.Description)
 log.Println(strings.Repeat("-", 88))
 return parameterGroup
}
```

```
// SetUserParameters shows how to get the parameters contained in a custom parameter
// group and update some of the parameter values in the group.
func (scenario GetStartedInstances) SetUserParameters(ctx context.Context,
 parameterGroupName string) {
 log.Println("Let's set some parameter values in your parameter group.")
 dbParameters, err := scenario.instances.GetParameters(ctx, parameterGroupName, "")
 if err != nil {
  panic(err)
 }
 var updateParams []types.Parameter
 for _, dbParam := range dbParameters {
  if strings.HasPrefix(*dbParam.ParameterName, "auto_increment") &&
   *dbParam.IsModifiable && *dbParam.DataType == "integer" {
   log.Printf("The %v parameter is described as:\n\t%v",
    *dbParam.ParameterName, *dbParam.Description)
   rangeSplit := strings.Split(*dbParam.AllowedValues, "-")
   lower, _ := strconv.Atoi(rangeSplit[0])
   upper, _ := strconv.Atoi(rangeSplit[1])
   newValue := scenario.questioner.AskInt(
    fmt.Sprintf("Enter a value between %v and %v:", lower, upper),
    demotools.InIntRange{Lower: lower, Upper: upper})
   dbParam.ParameterValue = aws.String(strconv.Itoa(newValue))
   updateParams = append(updateParams, dbParam)
  }
 }
 err = scenario.instances.UpdateParameters(ctx, parameterGroupName, updateParams)
 if err != nil {
  panic(err)
 }
 log.Println("To get a list of parameters that you set previously, specify a source
 of 'user'.")
 userParameters, err := scenario.instances.GetParameters(ctx, parameterGroupName,
 "user")
 if err != nil {
  panic(err)
 }
 log.Println("Here are the parameters you set:")
 for _, param := range userParameters {
  log.Printf("\t%v: %v\n", *param.ParameterName, *param.ParameterValue)
 }
 log.Println(strings.Repeat("-", 88))
}

// CreateInstance shows how to create a DB instance that contains a database of a
```

```
// specified type. The database is also configured to use a custom DB parameter
 group.
func (scenario GetStartedInstances) CreateInstance(ctx context.Context, instanceName
 string, dbEngine string,
 dbName string, parameterGroup *types.DBParameterGroup) *types.DBInstance {

 log.Println("Checking for an existing DB instance.")
 instance, err := scenario.instances.GetInstance(ctx, instanceName)
 if err != nil {
  panic(err)
 }
 if instance == nil {
  adminUsername := scenario.questioner.Ask(
   "Enter an administrator username for the database: ", demotools.NotEmpty{})
  adminPassword := scenario.questioner.AskPassword(
   "Enter a password for the administrator (at least 8 characters): ", 7)
  engineVersions, err := scenario.instances.GetEngineVersions(ctx, dbEngine,
   *parameterGroup.DBParameterGroupFamily)
  if err != nil {
   panic(err)
  }
  var engineChoices []string
  for _, engine := range engineVersions {
   engineChoices = append(engineChoices, *engine.EngineVersion)
  }
  engineIndex := scenario.questioner.AskChoice(
   "The available engines for your parameter group are:\n", engineChoices)
  engineSelection := engineVersions[engineIndex]
  instOpts, err := scenario.instances.GetOrderableInstances(ctx,
 *engineSelection.Engine,
   *engineSelection.EngineVersion)
  if err != nil {
   panic(err)
  }
  optSet := map[string]struct{}{}
  for _, opt := range instOpts {
   if strings.Contains(*opt.DBInstanceClass, "micro") {
    optSet[*opt.DBInstanceClass] = struct{}{}
   }
  }
  var optChoices []string
  for opt := range optSet {
   optChoices = append(optChoices, opt)
  }
```

```
  sort.Strings(optChoices)
  optIndex := scenario.questioner.AskChoice(
   "The available micro DB instance classes for your database engine are:\n",
 optChoices)
  storageType := "standard"
  allocatedStorage := int32(5)
  log.Printf("Creating a DB instance named %v and database %v.\n"+
   "The DB instance is configured to use your custom parameter group %v,\n"+
   "selected engine %v,\n"+
   "selected DB instance class %v,"+
   "and %v GiB of %v storage.\n"+
   "This typically takes several minutes.",
   instanceName, dbName, *parameterGroup.DBParameterGroupName,
 *engineSelection.EngineVersion,
   optChoices[optIndex], allocatedStorage, storageType)
  instance, err = scenario.instances.CreateInstance(
   ctx, instanceName, dbName, *engineSelection.Engine,
 *engineSelection.EngineVersion,
   *parameterGroup.DBParameterGroupName, optChoices[optIndex], storageType,
   allocatedStorage, adminUsername, adminPassword)
  if err != nil {
   panic(err)
  }
  for *instance.DBInstanceStatus != "available" {
   scenario.helper.Pause(30)
   instance, err = scenario.instances.GetInstance(ctx, instanceName)
   if err != nil {
    panic(err)
   }
  }
  log.Println("Instance created and available.")
 }
 log.Println("Instance data:")
 log.Printf("\tDBInstanceIdentifier: %v\n", *instance.DBInstanceIdentifier)
 log.Printf("\tARN: %v\n", *instance.DBInstanceArn)
 log.Printf("\tStatus: %v\n", *instance.DBInstanceStatus)
 log.Printf("\tEngine: %v\n", *instance.Engine)
 log.Printf("\tEngine version: %v\n", *instance.EngineVersion)
 log.Println(strings.Repeat("-", 88))
 return instance
}

// DisplayConnection displays connection information about a DB instance and tips
// on how to connect to it.
```

```
func (scenario GetStartedInstances) DisplayConnection(instance *types.DBInstance) {
 log.Println(
  "You can now connect to your database by using your favorite MySQL client.\n" +
   "One way to connect is by using the 'mysql' shell on an Amazon EC2 instance\n" +
   "that is running in the same VPC as your DB instance. Pass the endpoint,\n" +
   "port, and administrator username to 'mysql'. Then, enter your password\n" +
   "when prompted:")
 log.Printf("\n\tmysql -h %v -P %v -u %v -p\n",
  *instance.Endpoint.Address, instance.Endpoint.Port, *instance.MasterUsername)
 log.Println("For more information, see the User Guide for RDS:\n" +
  "\thttps://docs.aws.amazon.com/AmazonRDS/latest/UserGuide/
CHAP_GettingStarted.CreatingConnecting.MySQL.html#CHAP_GettingStarted.Connecting.MySQL")
 log.Println(strings.Repeat("-", 88))
}

// CreateSnapshot shows how to create a DB instance snapshot and wait until it's
 available.
func (scenario GetStartedInstances) CreateSnapshot(ctx context.Context, instance
 *types.DBInstance) {
 if scenario.questioner.AskBool(
  "Do you want to create a snapshot of your DB instance (y/n)? ", "y") {
  snapshotId := fmt.Sprintf("%v-%v", *instance.DBInstanceIdentifier,
 scenario.helper.UniqueId())
  log.Printf("Creating a snapshot named %v. This typically takes a few minutes.\n",
 snapshotId)
  snapshot, err := scenario.instances.CreateSnapshot(ctx,
 *instance.DBInstanceIdentifier, snapshotId)
  if err != nil {
   panic(err)
  }
  for *snapshot.Status != "available" {
   scenario.helper.Pause(30)
   snapshot, err = scenario.instances.GetSnapshot(ctx, snapshotId)
   if err != nil {
    panic(err)
   }
  }
  log.Println("Snapshot data:")
  log.Printf("\tDBSnapshotIdentifier: %v\n", *snapshot.DBSnapshotIdentifier)
  log.Printf("\tARN: %v\n", *snapshot.DBSnapshotArn)
  log.Printf("\tStatus: %v\n", *snapshot.Status)
  log.Printf("\tEngine: %v\n", *snapshot.Engine)
  log.Printf("\tEngine version: %v\n", *snapshot.EngineVersion)
  log.Printf("\tDBInstanceIdentifier: %v\n", *snapshot.DBInstanceIdentifier)
```

```
  log.Printf("\tSnapshotCreateTime: %v\n", *snapshot.SnapshotCreateTime)
  log.Println(strings.Repeat("-", 88))
 }
}

// Cleanup shows how to clean up a DB instance and DB parameter group.
// Before the DB parameter group can be deleted, all associated DB instances must
 first be deleted.
func (scenario GetStartedInstances) Cleanup(
 ctx context.Context, instance *types.DBInstance, parameterGroup
 *types.DBParameterGroup) {

 if scenario.questioner.AskBool(
  "\nDo you want to delete the database instance and parameter group (y/n)? ", "y")
 {
  log.Printf("Deleting database instance %v.\n", *instance.DBInstanceIdentifier)
  err := scenario.instances.DeleteInstance(ctx, *instance.DBInstanceIdentifier)
  if err != nil {
   panic(err)
  }
  log.Println(
   "Waiting for the DB instance to delete. This typically takes several minutes.")
  for instance != nil {
   scenario.helper.Pause(30)
   instance, err = scenario.instances.GetInstance(ctx,
 *instance.DBInstanceIdentifier)
   if err != nil {
    panic(err)
   }
  }
  log.Printf("Deleting parameter group %v.", *parameterGroup.DBParameterGroupName)
  err = scenario.instances.DeleteParameterGroup(ctx,
 *parameterGroup.DBParameterGroupName)
  if err != nil {
   panic(err)
  }
 }
}

// IScenarioHelper abstracts the function from a scenario so that it
// can be mocked for unit testing.
type IScenarioHelper interface {
 Pause(secs int)
 UniqueId() string
```

```
}
type ScenarioHelper struct{}

// Pause waits for the specified number of seconds.
func (helper ScenarioHelper) Pause(secs int) {
 time.Sleep(time.Duration(secs) * time.Second)
}

// UniqueId returns a new UUID.
func (helper ScenarioHelper) UniqueId() string {
 return uuid.New().String()
}
```

Amazon RDS アクションを管理するためにシナリオによって呼び出される関数を定義します。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}


// GetParameterGroup gets a DB parameter group by name.
func (instances *DbInstances) GetParameterGroup(ctx context.Context,
 parameterGroupName string) (
 *types.DBParameterGroup, error) {
 output, err := instances.RdsClient.DescribeDBParameterGroups(
  ctx, &rds.DescribeDBParameterGroupsInput{
   DBParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  var notFoundError *types.DBParameterGroupNotFoundFault
```

```
  if errors.As(err, &notFoundError) {
   log.Printf("Parameter group %v does not exist.\n", parameterGroupName)
   err = nil
  } else {
   log.Printf("Error getting parameter group %v: %v\n", parameterGroupName, err)
  }
  return nil, err
 } else {
  return &output.DBParameterGroups[0], err
 }
}



// CreateParameterGroup creates a DB parameter group that is based on the specified
// parameter group family.
func (instances *DbInstances) CreateParameterGroup(
 ctx context.Context, parameterGroupName string, parameterGroupFamily string,
 description string) (
 *types.DBParameterGroup, error) {

 output, err := instances.RdsClient.CreateDBParameterGroup(ctx,
  &rds.CreateDBParameterGroupInput{
   DBParameterGroupName:   aws.String(parameterGroupName),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
   Description:            aws.String(description),
  })
 if err != nil {
  log.Printf("Couldn't create parameter group %v: %v\n", parameterGroupName, err)
  return nil, err
 } else {
  return output.DBParameterGroup, err
 }
}



// DeleteParameterGroup deletes the named DB parameter group.
func (instances *DbInstances) DeleteParameterGroup(ctx context.Context,
 parameterGroupName string) error {
 _, err := instances.RdsClient.DeleteDBParameterGroup(ctx,
  &rds.DeleteDBParameterGroupInput{
   DBParameterGroupName: aws.String(parameterGroupName),
  })
```

```
 if err != nil {
  log.Printf("Couldn't delete parameter group %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}



// GetParameters gets the parameters that are contained in a DB parameter group.
func (instances *DbInstances) GetParameters(ctx context.Context, parameterGroupName
 string, source string) (
 []types.Parameter, error) {

 var output *rds.DescribeDBParametersOutput
 var params []types.Parameter
 var err error
 parameterPaginator := rds.NewDescribeDBParametersPaginator(instances.RdsClient,
  &rds.DescribeDBParametersInput{
   DBParameterGroupName: aws.String(parameterGroupName),
   Source:               aws.String(source),
  })
 for parameterPaginator.HasMorePages() {
  output, err = parameterPaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get parameters for %v: %v\n", parameterGroupName, err)
   break
  } else {
   params = append(params, output.Parameters...)
  }
 }
 return params, err
}



// UpdateParameters updates parameters in a named DB parameter group.
func (instances *DbInstances) UpdateParameters(ctx context.Context,
 parameterGroupName string, params []types.Parameter) error {
 _, err := instances.RdsClient.ModifyDBParameterGroup(ctx,
  &rds.ModifyDBParameterGroupInput{
   DBParameterGroupName: aws.String(parameterGroupName),
   Parameters:           params,
```

```
  })
 if err != nil {
  log.Printf("Couldn't update parameters in %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}



// CreateSnapshot creates a snapshot of a DB instance.
func (instances *DbInstances) CreateSnapshot(ctx context.Context, instanceName
 string, snapshotName string) (
 *types.DBSnapshot, error) {
 output, err := instances.RdsClient.CreateDBSnapshot(ctx,
 &rds.CreateDBSnapshotInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBSnapshotIdentifier: aws.String(snapshotName),
 })
 if err != nil {
  log.Printf("Couldn't create snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return output.DBSnapshot, nil
 }
}



// GetSnapshot gets a DB instance snapshot.
func (instances *DbInstances) GetSnapshot(ctx context.Context, snapshotName string)
 (*types.DBSnapshot, error) {
 output, err := instances.RdsClient.DescribeDBSnapshots(ctx,
  &rds.DescribeDBSnapshotsInput{
   DBSnapshotIdentifier: aws.String(snapshotName),
  })
 if err != nil {
  log.Printf("Couldn't get snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return &output.DBSnapshots[0], nil
 }
}
```

```
// CreateInstance creates a DB instance.
func (instances *DbInstances) CreateInstance(ctx context.Context, instanceName
 string, dbName string,
 dbEngine string, dbEngineVersion string, parameterGroupName string, dbInstanceClass
 string,
 storageType string, allocatedStorage int32, adminName string, adminPassword string)
 (
 *types.DBInstance, error) {
 output, err := instances.RdsClient.CreateDBInstance(ctx,
 &rds.CreateDBInstanceInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBName:               aws.String(dbName),
  DBParameterGroupName: aws.String(parameterGroupName),
  Engine:               aws.String(dbEngine),
  EngineVersion:        aws.String(dbEngineVersion),
  DBInstanceClass:      aws.String(dbInstanceClass),
  StorageType:          aws.String(storageType),
  AllocatedStorage:     aws.Int32(allocatedStorage),
  MasterUsername:       aws.String(adminName),
  MasterUserPassword:   aws.String(adminPassword),
 })
 if err != nil {
  log.Printf("Couldn't create instance %v: %v\n", instanceName, err)
  return nil, err
 } else {
  return output.DBInstance, nil
 }
}



// GetInstance gets data about a DB instance.
func (instances *DbInstances) GetInstance(ctx context.Context, instanceName string)
 (
 *types.DBInstance, error) {
 output, err := instances.RdsClient.DescribeDBInstances(ctx,
  &rds.DescribeDBInstancesInput{
   DBInstanceIdentifier: aws.String(instanceName),
  })
 if err != nil {
  var notFoundError *types.DBInstanceNotFoundFault
```

```
  if errors.As(err, &notFoundError) {
   log.Printf("DB instance %v does not exist.\n", instanceName)
   err = nil
  } else {
   log.Printf("Couldn't get instance %v: %v\n", instanceName, err)
  }
  return nil, err
 } else {
  return &output.DBInstances[0], nil
 }
}



// DeleteInstance deletes a DB instance.
func (instances *DbInstances) DeleteInstance(ctx context.Context, instanceName
 string) error {
 _, err := instances.RdsClient.DeleteDBInstance(ctx, &rds.DeleteDBInstanceInput{
  DBInstanceIdentifier:   aws.String(instanceName),
  SkipFinalSnapshot:      aws.Bool(true),
  DeleteAutomatedBackups: aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete instance %v: %v\n", instanceName, err)
  return err
 } else {
  return nil
 }
}



// GetEngineVersions gets database engine versions that are available for the
 specified engine
// and parameter group family.
func (instances *DbInstances) GetEngineVersions(ctx context.Context, engine string,
 parameterGroupFamily string) (
 []types.DBEngineVersion, error) {
 output, err := instances.RdsClient.DescribeDBEngineVersions(ctx,
  &rds.DescribeDBEngineVersionsInput{
   Engine:                 aws.String(engine),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
  })
 if err != nil {
```

```
  log.Printf("Couldn't get engine versions for %v: %v\n", engine, err)
  return nil, err
 } else {
  return output.DBEngineVersions, nil
 }
}



// GetOrderableInstances uses a paginator to get DB instance options that can be
 used to create DB instances that are
// compatible with a set of specifications.
func (instances *DbInstances) GetOrderableInstances(ctx context.Context, engine
 string, engineVersion string) (
 []types.OrderableDBInstanceOption, error) {

 var output *rds.DescribeOrderableDBInstanceOptionsOutput
 var instanceOptions []types.OrderableDBInstanceOption
 var err error
 orderablePaginator :=
 rds.NewDescribeOrderableDBInstanceOptionsPaginator(instances.RdsClient,
  &rds.DescribeOrderableDBInstanceOptionsInput{
   Engine:        aws.String(engine),
   EngineVersion: aws.String(engineVersion),
  })
 for orderablePaginator.HasMorePages() {
  output, err = orderablePaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get orderable DB instance options: %v\n", err)
   break
  } else {
   instanceOptions = append(instanceOptions, output.OrderableDBInstanceOptions...)
  }
 }
 return instanceOptions, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - CreateDBInstance

- CreateDBParameterGroup
- CreateDBSnapshot
- DeleteDBInstance
- DeleteDBParameterGroup
- DescribeDBEngineVersions
- DescribeDBInstances
- DescribeDBParameterGroups
- DescribeDBParameters
- DescribeDBSnapshots
- DescribeOrderableDBInstanceOptions
- ModifyDBParameterGroup

アクション

`CreateDBInstance`

次のコード例は、`CreateDBInstance` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)
```

```
type DbInstances struct {
 RdsClient *rds.Client
}



// CreateInstance creates a DB instance.
func (instances *DbInstances) CreateInstance(ctx context.Context, instanceName
 string, dbName string,
 dbEngine string, dbEngineVersion string, parameterGroupName string, dbInstanceClass
 string,
 storageType string, allocatedStorage int32, adminName string, adminPassword string)
 (
 *types.DBInstance, error) {
 output, err := instances.RdsClient.CreateDBInstance(ctx,
 &rds.CreateDBInstanceInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBName:               aws.String(dbName),
  DBParameterGroupName: aws.String(parameterGroupName),
  Engine:               aws.String(dbEngine),
  EngineVersion:        aws.String(dbEngineVersion),
  DBInstanceClass:      aws.String(dbInstanceClass),
  StorageType:          aws.String(storageType),
  AllocatedStorage:     aws.Int32(allocatedStorage),
  MasterUsername:       aws.String(adminName),
  MasterUserPassword:   aws.String(adminPassword),
 })
 if err != nil {
  log.Printf("Couldn't create instance %v: %v\n", instanceName, err)
  return nil, err
 } else {
  return output.DBInstance, nil
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateDBInstance」を参照してください。

CreateDBParameterGroup

次のコード例は、CreateDBParameterGroup を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// CreateParameterGroup creates a DB parameter group that is based on the specified
// parameter group family.
func (instances *DbInstances) CreateParameterGroup(
 ctx context.Context, parameterGroupName string, parameterGroupFamily string,
 description string) (
 *types.DBParameterGroup, error) {

 output, err := instances.RdsClient.CreateDBParameterGroup(ctx,
  &rds.CreateDBParameterGroupInput{
   DBParameterGroupName:   aws.String(parameterGroupName),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
   Description:            aws.String(description),
  })
 if err != nil {
  log.Printf("Couldn't create parameter group %v: %v\n", parameterGroupName, err)
  return nil, err
 } else {
```

```
  return output.DBParameterGroup, err
 }
}
```

- 詳細については、「AWS SDK for Go API リファレンス」の「CreateDBParameterGroup」を参照してください。

`CreateDBSnapshot`

次のコード例は、`CreateDBSnapshot` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// CreateSnapshot creates a snapshot of a DB instance.
func (instances *DbInstances) CreateSnapshot(ctx context.Context, instanceName
 string, snapshotName string) (
```

```
 *types.DBSnapshot, error) {
 output, err := instances.RdsClient.CreateDBSnapshot(ctx,
 &rds.CreateDBSnapshotInput{
  DBInstanceIdentifier: aws.String(instanceName),
  DBSnapshotIdentifier: aws.String(snapshotName),
 })
 if err != nil {
  log.Printf("Couldn't create snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return output.DBSnapshot, nil
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「CreateDBSnapshot」を参照してください。

`DeleteDBInstance`

次のコード例は、`DeleteDBInstance` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)
```

```
type DbInstances struct {
 RdsClient *rds.Client
}



// DeleteInstance deletes a DB instance.
func (instances *DbInstances) DeleteInstance(ctx context.Context, instanceName
 string) error {
 _, err := instances.RdsClient.DeleteDBInstance(ctx, &rds.DeleteDBInstanceInput{
  DBInstanceIdentifier:   aws.String(instanceName),
  SkipFinalSnapshot:      aws.Bool(true),
  DeleteAutomatedBackups: aws.Bool(true),
 })
 if err != nil {
  log.Printf("Couldn't delete instance %v: %v\n", instanceName, err)
  return err
 } else {
  return nil
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteDBInstance」を参照してください。

`DeleteDBParameterGroup`

次のコード例は、`DeleteDBParameterGroup` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// DeleteParameterGroup deletes the named DB parameter group.
func (instances *DbInstances) DeleteParameterGroup(ctx context.Context,
 parameterGroupName string) error {
 _, err := instances.RdsClient.DeleteDBParameterGroup(ctx,
  &rds.DeleteDBParameterGroupInput{
   DBParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  log.Printf("Couldn't delete parameter group %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
}
```

- 詳細については、「AWS SDK for Go API リファレンス」の「DeleteDBParameterGroup」を参照してください。

DescribeDBEngineVersions

次のコード例は、DescribeDBEngineVersions を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// GetEngineVersions gets database engine versions that are available for the
 specified engine
// and parameter group family.
func (instances *DbInstances) GetEngineVersions(ctx context.Context, engine string,
 parameterGroupFamily string) (
 []types.DBEngineVersion, error) {
 output, err := instances.RdsClient.DescribeDBEngineVersions(ctx,
  &rds.DescribeDBEngineVersionsInput{
   Engine:                 aws.String(engine),
   DBParameterGroupFamily: aws.String(parameterGroupFamily),
  })
 if err != nil {
  log.Printf("Couldn't get engine versions for %v: %v\n", engine, err)
  return nil, err
 } else {
  return output.DBEngineVersions, nil
 }
```

```
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeDBEngineVersions」を参照してください。

`DescribeDBInstances`

次のコード例は、`DescribeDBInstances` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// GetInstance gets data about a DB instance.
func (instances *DbInstances) GetInstance(ctx context.Context, instanceName string)
 (
 *types.DBInstance, error) {
 output, err := instances.RdsClient.DescribeDBInstances(ctx,
```

```
  &rds.DescribeDBInstancesInput{
   DBInstanceIdentifier: aws.String(instanceName),
  })
 if err != nil {
  var notFoundError *types.DBInstanceNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("DB instance %v does not exist.\n", instanceName)
   err = nil
  } else {
   log.Printf("Couldn't get instance %v: %v\n", instanceName, err)
  }
  return nil, err
 } else {
  return &output.DBInstances[0], nil
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeDBInstances」を参照してください。

`DescribeDBParameterGroups`

次のコード例は、`DescribeDBParameterGroups` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
```

```
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// GetParameterGroup gets a DB parameter group by name.
func (instances *DbInstances) GetParameterGroup(ctx context.Context,
 parameterGroupName string) (
 *types.DBParameterGroup, error) {
 output, err := instances.RdsClient.DescribeDBParameterGroups(
  ctx, &rds.DescribeDBParameterGroupsInput{
   DBParameterGroupName: aws.String(parameterGroupName),
  })
 if err != nil {
  var notFoundError *types.DBParameterGroupNotFoundFault
  if errors.As(err, &notFoundError) {
   log.Printf("Parameter group %v does not exist.\n", parameterGroupName)
   err = nil
  } else {
   log.Printf("Error getting parameter group %v: %v\n", parameterGroupName, err)
  }
  return nil, err
 } else {
  return &output.DBParameterGroups[0], err
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「DescribeDBParameterGroups」を参照してください。

`DescribeDBParameters`

次のコード例は、`DescribeDBParameters` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// GetParameters gets the parameters that are contained in a DB parameter group.
func (instances *DbInstances) GetParameters(ctx context.Context, parameterGroupName
 string, source string) (
 []types.Parameter, error) {

 var output *rds.DescribeDBParametersOutput
 var params []types.Parameter
 var err error
 parameterPaginator := rds.NewDescribeDBParametersPaginator(instances.RdsClient,
  &rds.DescribeDBParametersInput{
   DBParameterGroupName: aws.String(parameterGroupName),
   Source:               aws.String(source),
  })
 for parameterPaginator.HasMorePages() {
  output, err = parameterPaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get parameters for %v: %v\n", parameterGroupName, err)
```

```
    break
   } else {
    params = append(params, output.Parameters...)
   }
  }
  return params, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「DescribeDBParameters」を参照してください。

`DescribeDBSnapshots`

次のコード例は、`DescribeDBSnapshots` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}
```

```
// GetSnapshot gets a DB instance snapshot.
func (instances *DbInstances) GetSnapshot(ctx context.Context, snapshotName string)
 (*types.DBSnapshot, error) {
 output, err := instances.RdsClient.DescribeDBSnapshots(ctx,
  &rds.DescribeDBSnapshotsInput{
   DBSnapshotIdentifier: aws.String(snapshotName),
  })
 if err != nil {
  log.Printf("Couldn't get snapshot %v: %v\n", snapshotName, err)
  return nil, err
 } else {
  return &output.DBSnapshots[0], nil
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「DescribeDBSnapshots」を参照してください。

`DescribeOrderableDBInstanceOptions`

次のコード例は、`DescribeOrderableDBInstanceOptions` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
```

```
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// GetOrderableInstances uses a paginator to get DB instance options that can be
 used to create DB instances that are
// compatible with a set of specifications.
func (instances *DbInstances) GetOrderableInstances(ctx context.Context, engine
 string, engineVersion string) (
 []types.OrderableDBInstanceOption, error) {

 var output *rds.DescribeOrderableDBInstanceOptionsOutput
 var instanceOptions []types.OrderableDBInstanceOption
 var err error
 orderablePaginator :=
 rds.NewDescribeOrderableDBInstanceOptionsPaginator(instances.RdsClient,
  &rds.DescribeOrderableDBInstanceOptionsInput{
   Engine:        aws.String(engine),
   EngineVersion: aws.String(engineVersion),
  })
 for orderablePaginator.HasMorePages() {
  output, err = orderablePaginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get orderable DB instance options: %v\n", err)
   break
  } else {
   instanceOptions = append(instanceOptions, output.OrderableDBInstanceOptions...)
  }
 }
 return instanceOptions, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeOrderableDBInstanceOptions」を参照してください。

ModifyDBParameterGroup

次のコード例は、ModifyDBParameterGroup を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/rds"
 "github.com/aws/aws-sdk-go-v2/service/rds/types"
)

type DbInstances struct {
 RdsClient *rds.Client
}



// UpdateParameters updates parameters in a named DB parameter group.
func (instances *DbInstances) UpdateParameters(ctx context.Context,
 parameterGroupName string, params []types.Parameter) error {
 _, err := instances.RdsClient.ModifyDBParameterGroup(ctx,
  &rds.ModifyDBParameterGroupInput{
   DBParameterGroupName: aws.String(parameterGroupName),
   Parameters:           params,
  })
 if err != nil {
  log.Printf("Couldn't update parameters in %v: %v\n", parameterGroupName, err)
  return err
 } else {
  return nil
 }
```

```
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ModifyDBParameterGroup」を参照してください。

サーバーレスサンプル

Lambda 関数での Amazon RDS データベースへの接続

次のコード例は、RDS データベースに接続する Lambda 関数を実装する方法を示しています。この関数は、シンプルなデータベースリクエストを実行し、結果を返します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda 関数での Amazon RDS データベースへの接続

```
/*
Golang v2 code here.
*/

package main

import (
 "context"
 "database/sql"
 "encoding/json"
 "fmt"
 "os"

 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/feature/rds/auth"
 _ "github.com/go-sql-driver/mysql"
```

```
)

type MyEvent struct {
 Name string `json:"name"`
}

func HandleRequest(event *MyEvent) (map[string]interface{}, error) {

 var dbName string = os.Getenv("DatabaseName")
 var dbUser string = os.Getenv("DatabaseUser")
 var dbHost string = os.Getenv("DBHost") // Add hostname without https
 var dbPort int = os.Getenv("Port")      // Add port number
 var dbEndpoint string = fmt.Sprintf("%s:%d", dbHost, dbPort)
 var region string = os.Getenv("AWS_REGION")

 cfg, err := config.LoadDefaultConfig(context.TODO())
 if err != nil {
  panic("configuration error: " + err.Error())
 }

 authenticationToken, err := auth.BuildAuthToken(
  context.TODO(), dbEndpoint, region, dbUser, cfg.Credentials)
 if err != nil {
  panic("failed to create authentication token: " + err.Error())
 }

 dsn := fmt.Sprintf("%s:%s@tcp(%s)/%s?tls=true&allowCleartextPasswords=true",
  dbUser, authenticationToken, dbEndpoint, dbName,
 )

 db, err := sql.Open("mysql", dsn)
 if err != nil {
  panic(err)
 }

 defer db.Close()

 var sum int
 err = db.QueryRow("SELECT ?+? AS sum", 3, 2).Scan(&sum)
 if err != nil {
  panic(err)
 }
 s := fmt.Sprint(sum)
 message := fmt.Sprintf("The selected sum is: %s", s)
```

```
 messageBytes, err := json.Marshal(message)
 if err != nil {
  return nil, err
 }

 messageString := string(messageBytes)
 return map[string]interface{}{
  "statusCode": 200,
  "headers":    map[string]string{"Content-Type": "application/json"},
  "body":       messageString,
 }, nil
}

func main() {
 lambda.Start(HandleRequest)
}
```

SDK for Go V2 を使用した Amazon Redshift の例

次のコード例は、Amazon Redshift で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

基本 は、重要なオペレーションをサービス内で実行する方法を示すコード例です。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- はじめに
- 基本
- アクション

はじめに

Hello Amazon Redshift

次のコード例は、Amazon Redshift の使用を開始する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/redshift"
)

// main uses the AWS SDK for Go V2 to create a Redshift client
// and list up to 10 clusters in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 redshiftClient := redshift.NewFromConfig(sdkConfig)
 count := 20
 fmt.Printf("Let's list up to %v clusters for your account.\n", count)
```

```
 result, err := redshiftClient.DescribeClusters(ctx,
 &redshift.DescribeClustersInput{
  MaxRecords: aws.Int32(int32(count)),
 })
 if err != nil {
  fmt.Printf("Couldn't list clusters for your account. Here's why: %v\n", err)
  return
 }
 if len(result.Clusters) == 0 {
  fmt.Println("You don't have any clusters!")
  return
 }
 for _, cluster := range result.Clusters {
  fmt.Printf("\t%v : %v\n", *cluster.ClusterIdentifier, *cluster.ClusterStatus)
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeClusters」を参照してください。

基本

基本を学ぶ

次のコード例は、以下の操作方法を示しています。

- Redshift クラスターを作成します。
- クラスター内のデータベースを一覧表示します。
- Movies という名前のテーブルを作成します。
- Movies テーブルにデータを入力します。
- Movies テーブルに対して年に基づくクエリを実行します。
- Redshift クラスターを変更します。
- Amazon Redshift クラスターを削除します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package scenarios

import (
 "context"
 "encoding/json"
 "errors"
 "fmt"
 "log"
 "math/rand"
 "strings"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 redshift_types "github.com/aws/aws-sdk-go-v2/service/redshift/types"
 redshiftdata_types "github.com/aws/aws-sdk-go-v2/service/redshiftdata/types"
 "github.com/aws/aws-sdk-go-v2/service/secretsmanager"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/redshift/actions"

 "github.com/aws/aws-sdk-go-v2/service/redshift"
 "github.com/aws/aws-sdk-go-v2/service/redshiftdata"
)

// IScenarioHelper abstracts input and wait functions from a scenario so that they
// can be mocked for unit testing.
type IScenarioHelper interface {
 GetName() string
}

const rMax = 100000

type ScenarioHelper struct {
 Prefix string
```

```
 Random *rand.Rand
}

// GetName returns a unique name formed of a prefix and a random number.
func (helper ScenarioHelper) GetName() string {
 return fmt.Sprintf("%v%v", helper.Prefix, helper.Random.Intn(rMax))
}

// RedshiftBasicsScenario separates the steps of this scenario into individual
 functions so that
// they are simpler to read and understand.
type RedshiftBasicsScenario struct {
 sdkConfig         aws.Config
 helper            IScenarioHelper
 questioner        demotools.IQuestioner
 pauser            demotools.IPausable
 filesystem        demotools.IFileSystem
 redshiftActor     *actions.RedshiftActions
 redshiftDataActor *actions.RedshiftDataActions
 secretsmanager    *SecretsManager
}

// SecretsManager is used to retrieve username and password information from a
 secure service.
type SecretsManager struct {
 SecretsManagerClient *secretsmanager.Client
}

// RedshiftBasics constructs a new Redshift Basics runner.
func RedshiftBasics(sdkConfig aws.Config, questioner demotools.IQuestioner, pauser
 demotools.IPausable, filesystem demotools.IFileSystem, helper IScenarioHelper)
 RedshiftBasicsScenario {
 scenario := RedshiftBasicsScenario{
  sdkConfig:         sdkConfig,
  helper:            helper,
  questioner:        questioner,
  pauser:            pauser,
  filesystem:        filesystem,
  secretsmanager:    &SecretsManager{SecretsManagerClient:
 secretsmanager.NewFromConfig(sdkConfig)},
  redshiftActor:     &actions.RedshiftActions{RedshiftClient:
 redshift.NewFromConfig(sdkConfig)},
  redshiftDataActor: &actions.RedshiftDataActions{RedshiftDataClient:
 redshiftdata.NewFromConfig(sdkConfig)},
```

```
 }
 return scenario
}


// Movie makes it easier to use Movie objects given in json format.
type Movie struct {
 ID    int    `json:"id"`
 Title string `json:"title"`
 Year  int    `json:"year"`
}


// User makes it easier to get the User data back from SecretsManager and use it
 later.
type User struct {
 Username string `json:"userName"`
 Password string `json:"userPassword"`
}

// Run runs the RedshiftBasics interactive example that shows you how to use Amazon
// Redshift and how to interact with its common endpoints.
//
// 0. Retrieve username and password information to access Redshift.
// 1. Create a cluster.
// 2. Wait for the cluster to become available.
// 3. List the available databases in the region.
// 4. Create a table named "Movies" in the "dev" database.
// 5. Populate the movies table from the "movies.json" file.
// 6. Query the movies table by year.
// 7. Modify the cluster's maintenance window.
// 8. Optionally clean up all resources created during this demo.
//
// This example creates an Amazon Redshift service client from the specified
 sdkConfig so that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
func (runner *RedshiftBasicsScenario) Run(ctx context.Context) {

 user := User{}
 secretId := "s3express/basics/secrets"
```

```
clusterId := "demo-cluster-1"
maintenanceWindow := "wed:07:30-wed:08:00"
databaseName := "dev"
tableName := "Movies"
fileName := "Movies.json"
nodeType := "ra3.xlplus"
clusterType := "single-node"

defer func() {
 if r := recover(); r != nil {
  log.Println("Something went wrong with the demo.")
  _, isMock := runner.questioner.(*demotools.MockQuestioner)
  if isMock || runner.questioner.AskBool("Do you want to see the full error message
(y/n)?", "y") {
   log.Println(r)
  }
  runner.cleanUpResources(ctx, clusterId, databaseName, tableName, user.Username,
runner.questioner)
 }
}()

// Retrieve the userName and userPassword from SecretsManager
output, err := runner.secretsmanager.SecretsManagerClient.GetSecretValue(ctx,
&secretsmanager.GetSecretValueInput{
 SecretId: aws.String(secretId),
})
if err != nil {
 log.Printf("There was a problem getting the secret value: %s", err)
 log.Printf("Please make sure to create a secret named 's3express/basics/secrets'
with keys of 'userName' and 'userPassword'.")
 panic(err)
}

err = json.Unmarshal([]byte(*output.SecretString), &user)
if err != nil {
 log.Printf("There was a problem parsing the secret value from JSON: %s", err)
 panic(err)
}

// Create the Redshift cluster
_, err = runner.redshiftActor.CreateCluster(ctx, clusterId, user.Username,
user.Password, nodeType, clusterType, true)
if err != nil {
 var clusterAlreadyExistsFault *redshift_types.ClusterAlreadyExistsFault
```

```
 if errors.As(err, &clusterAlreadyExistsFault) {
  log.Println("Cluster already exists. Continuing.")
 } else {
  log.Println("Error creating cluster.")
  panic(err)
 }
}

// Wait for the cluster to become available
waiter := redshift.NewClusterAvailableWaiter(runner.redshiftActor.RedshiftClient)
err = waiter.Wait(ctx, &redshift.DescribeClustersInput{
 ClusterIdentifier: aws.String(clusterId),
}, 5*time.Minute)
if err != nil {
 log.Println("An error occurred waiting for the cluster.")
 panic(err)
}

// Get some info about the cluster
describeOutput, err := runner.redshiftActor.DescribeClusters(ctx, clusterId)
if err != nil {
 log.Println("Something went wrong trying to get information about the cluster.")
 panic(err)
}
log.Println("Here's some information about the cluster.")
log.Printf("The cluster's status is %s", *describeOutput.Clusters[0].ClusterStatus)
log.Printf("The cluster was created at %s",
*describeOutput.Clusters[0].ClusterCreateTime)

// List databases
log.Println("List databases in", clusterId)
runner.questioner.Ask("Press Enter to continue...")
err = runner.redshiftDataActor.ListDatabases(ctx, clusterId, databaseName,
user.Username)
if err != nil {
 log.Printf("Failed to list databases: %v\n", err)
 panic(err)
}

// Create the "Movies" table
log.Println("Now you will create a table named " + tableName + ".")
runner.questioner.Ask("Press Enter to continue...")
err = nil
```

```
 result, err := runner.redshiftDataActor.CreateTable(ctx, clusterId, databaseName,
 tableName, user.Username, runner.pauser, []string{"title VARCHAR(256)", "year
 INT"})
 if err != nil {
  log.Printf("Failed to create table: %v\n", err)
  panic(err)
 }

 describeInput := redshiftdata.DescribeStatementInput{
  Id: result.Id,
 }
 query := actions.RedshiftQuery{
  Context: ctx,
  Input:   describeInput,
  Result:  result,
 }
 err = runner.redshiftDataActor.WaitForQueryStatus(query, runner.pauser, true)
 if err != nil {
  log.Printf("Failed to execute query: %v\n", err)
  panic(err)
 }
 log.Printf("Successfully executed query\n")

 // Populate the "Movies" table
 runner.PopulateMoviesTable(ctx, clusterId, databaseName, tableName, user.Username,
 fileName)

 // Query the "Movies" table by year
 log.Println("Query the Movies table by year.")
 year := runner.questioner.AskInt(
  fmt.Sprintf("Enter a value between %v and %v:", 2012, 2014),
  demotools.InIntRange{Lower: 2012, Upper: 2014})
 runner.QueryMoviesByYear(ctx, clusterId, databaseName, tableName, user.Username,
 year)

 // Modify the cluster's maintenance window
 runner.redshiftActor.ModifyCluster(ctx, clusterId, maintenanceWindow)

 // Delete the Redshift cluster if confirmed
 runner.cleanUpResources(ctx, clusterId, databaseName, tableName, user.Username,
 runner.questioner)

 log.Println("Thanks for watching!")
}
```

```
// cleanUpResources asks the user if they would like to delete each resource created
 during the scenario, from most
// impactful to least impactful. If any choice to delete is made, further deletion
 attempts are skipped.
func (runner *RedshiftBasicsScenario) cleanUpResources(ctx context.Context,
 clusterId string, databaseName string, tableName string, userName string,
 questioner demotools.IQuestioner) {
 deleted := false
 var err error = nil
 if questioner.AskBool("Do you want to delete the entire cluster? This will clean up
 all resources. (y/n)", "y") {
  deleted, err = runner.redshiftActor.DeleteCluster(ctx, clusterId)
  if err != nil {
   log.Printf("Error deleting cluster: %v", err)
  }
 }
 if !deleted && questioner.AskBool("Do you want to delete the dev table? This will
 clean up all inserted records but keep your cluster intact. (y/n)", "y") {
  deleted, err = runner.redshiftDataActor.DeleteTable(ctx, clusterId, databaseName,
 tableName, userName)
  if err != nil {
   log.Printf("Error deleting movies table: %v", err)
  }
 }
 if !deleted && questioner.AskBool("Do you want to delete all rows in the Movies
 table? This will clean up all inserted records but keep your cluster and table
 intact. (y/n)", "y") {
  deleted, err = runner.redshiftDataActor.DeleteDataRows(ctx, clusterId,
 databaseName, tableName, userName, runner.pauser)
  if err != nil {
   log.Printf("Error deleting data rows: %v", err)
  }
 }
 if !deleted {
  log.Print("Please manually delete any unwanted resources.")
 }
}


// loadMoviesFromJSON takes the <fileName> file and populates a slice of Movie
 objects.
func (runner *RedshiftBasicsScenario) loadMoviesFromJSON(fileName string, filesystem
 demotools.IFileSystem) ([]Movie, error) {
```

```
 file, err := filesystem.OpenFile("../../resources/sample_files/" + fileName)
 if err != nil {
  return nil, err
 }
 defer filesystem.CloseFile(file)

 var movies []Movie
 err = json.NewDecoder(file).Decode(&movies)
 if err != nil {
  return nil, err
 }

 return movies, nil
}



// PopulateMoviesTable reads data from the <fileName> file and inserts records into
 the "Movies" table.
func (runner *RedshiftBasicsScenario) PopulateMoviesTable(ctx context.Context,
 clusterId string, databaseName string, tableName string, userName string, fileName
 string) {
 log.Println("Populate the " + tableName + " table using the " + fileName + "
 file.")
 numRecords := runner.questioner.AskInt(
  fmt.Sprintf("Enter a value between %v and %v:", 10, 100),
  demotools.InIntRange{Lower: 10, Upper: 100})

 movies, err := runner.loadMoviesFromJSON(fileName, runner.filesystem)
 if err != nil {
  log.Printf("Failed to load movies from JSON: %v\n", err)
  panic(err)
 }

 var sqlStatements []string

 for i, movie := range movies {
  if i >= numRecords {
   break
  }

  sqlStatement := fmt.Sprintf(`INSERT INTO %s (title, year) VALUES ('%s', %d);`,
   tableName,
```

```
    strings.Replace(movie.Title, "'", "''", -1), // Double any single quotes to
  escape them
    movie.Year)

  sqlStatements = append(sqlStatements, sqlStatement)
 }

 input := &redshiftdata.BatchExecuteStatementInput{
  ClusterIdentifier: aws.String(clusterId),
  Database:          aws.String(databaseName),
  DbUser:            aws.String(userName),
  Sqls:              sqlStatements,
 }

 result, err := runner.redshiftDataActor.ExecuteBatchStatement(ctx, *input)
 if err != nil {
  log.Printf("Failed to execute batch statement: %v\n", err)
  panic(err)
 }

 describeInput := redshiftdata.DescribeStatementInput{
  Id: result.Id,
 }

 query := actions.RedshiftQuery{
  Context: ctx,
  Result:  result,
  Input:   describeInput,
 }
 err = runner.redshiftDataActor.WaitForQueryStatus(query, runner.pauser, true)
 if err != nil {
  log.Printf("Failed to execute batch insert query: %v\n", err)
  return
 }
 log.Printf("Successfully executed batch statement\n")

 log.Printf("%d records were added to the Movies table.\n", numRecords)
}



// QueryMoviesByYear retrieves only movies from the "Movies" table which match the
 given year.
```

```
func (runner *RedshiftBasicsScenario) QueryMoviesByYear(ctx context.Context,
 clusterId string, databaseName string, tableName string, userName string, year int)
 {

 sqlStatement := fmt.Sprintf(`SELECT title FROM %s WHERE year = %d;`, tableName,
 year)

 input := &redshiftdata.ExecuteStatementInput{
  ClusterIdentifier: aws.String(clusterId),
  Database:          aws.String(databaseName),
  DbUser:            aws.String(userName),
  Sql:               aws.String(sqlStatement),
 }

 result, err := runner.redshiftDataActor.ExecuteStatement(ctx, *input)
 if err != nil {
  log.Printf("Failed to query movies: %v\n", err)
  panic(err)
 }

 log.Println("The identifier of the statement is ", *result.Id)

 describeInput := redshiftdata.DescribeStatementInput{
  Id: result.Id,
 }

 query := actions.RedshiftQuery{
  Context: ctx,
  Input:   describeInput,
  Result:  result,
 }
 err = runner.redshiftDataActor.WaitForQueryStatus(query, runner.pauser, true)
 if err != nil {
  log.Printf("Failed to execute query: %v\n", err)
  panic(err)
 }
 log.Printf("Successfully executed query\n")

 getResultOutput, err := runner.redshiftDataActor.GetStatementResult(ctx,
 *result.Id)
 if err != nil {
  log.Printf("Failed to query movies: %v\n", err)
  panic(err)
 }
```

```
 for _, row := range getResultOutput.Records {
  for _, col := range row {
   title, ok := col.(*redshiftdata_types.FieldMemberStringValue)
   if !ok {
    log.Println("Failed to parse the field")
   } else {
    log.Printf("The Movie title field is %s\n", title.Value)
   }
  }
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - CreateCluste
  - DescribeClusters
  - DescribeStatement
  - ExecuteStatement
  - GetStatementResult
  - ListDatabasesPaginator
  - ModifyCluster

アクション

`CreateCluster`

次のコード例は、`CreateCluster` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/redshift"
 "github.com/aws/aws-sdk-go-v2/service/redshift/types"
)



// RedshiftActions wraps Redshift service actions.
type RedshiftActions struct {
 RedshiftClient *redshift.Client
}



// CreateCluster sends a request to create a cluster with the given clusterId using
 the provided credentials.
func (actor RedshiftActions) CreateCluster(ctx context.Context, clusterId string,
 userName string, userPassword string, nodeType string, clusterType string,
 publiclyAccessible bool) (*redshift.CreateClusterOutput, error) {
 // Create a new Redshift cluster
 input := &redshift.CreateClusterInput{
  ClusterIdentifier:  aws.String(clusterId),
  MasterUserPassword: aws.String(userPassword),
  MasterUsername:     aws.String(userName),
  NodeType:           aws.String(nodeType),
  ClusterType:        aws.String(clusterType),
  PubliclyAccessible: aws.Bool(publiclyAccessible),
 }
 var opErr *types.ClusterAlreadyExistsFault
 output, err := actor.RedshiftClient.CreateCluster(ctx, input)
 if err != nil && errors.As(err, &opErr) {
  log.Println("Cluster already exists")
  return nil, nil
 } else if err != nil {
  log.Printf("Failed to create Redshift cluster: %v\n", err)
  return nil, err
```

```
 }

 log.Printf("Created cluster %s\n", *output.Cluster.ClusterIdentifier)
 return output, nil
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateCluster」を参照してください。

`DeleteCluster`

次のコード例は、`DeleteCluster` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/redshift"
 "github.com/aws/aws-sdk-go-v2/service/redshift/types"
)



// RedshiftActions wraps Redshift service actions.
type RedshiftActions struct {
 RedshiftClient *redshift.Client
}
```

```
// DeleteCluster deletes the given cluster.
func (actor RedshiftActions) DeleteCluster(ctx context.Context, clusterId string)
 (bool, error) {
 input := redshift.DeleteClusterInput{
  ClusterIdentifier:        aws.String(clusterId),
  SkipFinalClusterSnapshot: aws.Bool(true),
 }
 _, err := actor.RedshiftClient.DeleteCluster(ctx, &input)
 var opErr *types.ClusterNotFoundFault
 if err != nil && errors.As(err, &opErr) {
  log.Println("Cluster was not found. Where could it be?")
  return false, err
 } else if err != nil {
  log.Printf("Failed to delete Redshift cluster: %v\n", err)
  return false, err
 }
 waiter := redshift.NewClusterDeletedWaiter(actor.RedshiftClient)
 err = waiter.Wait(ctx, &redshift.DescribeClustersInput{
  ClusterIdentifier: aws.String(clusterId),
 }, 5*time.Minute)
 if err != nil {
  log.Printf("Wait time exceeded for deleting cluster, continuing: %v\n", err)
 }
 log.Printf("The cluster %s was deleted\n", clusterId)
 return true, nil
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteCluster」を参照してください。

DescribeClusters

次のコード例は、DescribeClusters を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/redshift"
 "github.com/aws/aws-sdk-go-v2/service/redshift/types"
)



// RedshiftActions wraps Redshift service actions.
type RedshiftActions struct {
 RedshiftClient *redshift.Client
}



// DescribeClusters returns information about the given cluster.
func (actor RedshiftActions) DescribeClusters(ctx context.Context, clusterId string)
 (*redshift.DescribeClustersOutput, error) {
 input, err := actor.RedshiftClient.DescribeClusters(ctx,
 &redshift.DescribeClustersInput{
  ClusterIdentifier: aws.String(clusterId),
 })
 var opErr *types.AccessToClusterDeniedFault
 if errors.As(err, &opErr) {
  println("Access to cluster denied.")
  panic(err)
 } else if err != nil {
  println("Failed to describe Redshift clusters.")
```

```
  return nil, err
 }
 return input, nil
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DescribeClusters」を参照してください。

`ModifyCluster`

次のコード例は、`ModifyCluster` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "errors"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/redshift"
 "github.com/aws/aws-sdk-go-v2/service/redshift/types"
)



// RedshiftActions wraps Redshift service actions.
type RedshiftActions struct {
 RedshiftClient *redshift.Client
}
```

```
// ModifyCluster sets the preferred maintenance window for the given cluster.
func (actor RedshiftActions) ModifyCluster(ctx context.Context, clusterId string,
 maintenanceWindow string) *redshift.ModifyClusterOutput {
 // Modify the cluster's maintenance window
 input := &redshift.ModifyClusterInput{
  ClusterIdentifier:          aws.String(clusterId),
  PreferredMaintenanceWindow: aws.String(maintenanceWindow),
 }

 var opErr *types.InvalidClusterStateFault
 output, err := actor.RedshiftClient.ModifyCluster(ctx, input)
 if err != nil && errors.As(err, &opErr) {
  log.Println("Cluster is in an invalid state.")
  panic(err)
 } else if err != nil {
  log.Printf("Failed to modify Redshift cluster: %v\n", err)
  panic(err)
 }

 log.Printf("The cluster was successfully modified and now has %s as the maintenance
 window\n", *output.Cluster.PreferredMaintenanceWindow)
 return output
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ModifyCluster」を参照してください。

SDK for Go V2 を使用した Amazon S3 の例

次のコード例は、Amazon S3 で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

基本 は、重要なオペレーションをサービス内で実行する方法を示すコード例です。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

シナリオは、1 つのサービス内から、または他の AWS のサービスと組み合わせて複数の関数を呼び出し、特定のタスクを実行する方法を示すコード例です。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- はじめに
- 基本
- アクション
- シナリオ
- サーバーレスサンプル

はじめに

Hello Amazon S3

次のコード例は、Amazon S3 の使用を開始する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "errors"
 "fmt"

 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/smithy-go"
)
```

```
// main uses the AWS SDK for Go V2 to create an Amazon Simple Storage Service
// (Amazon S3) client and list up to 10 buckets in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 s3Client := s3.NewFromConfig(sdkConfig)
 count := 10
 fmt.Printf("Let's list up to %v buckets for your account.\n", count)
 result, err := s3Client.ListBuckets(ctx, &s3.ListBucketsInput{})
 if err != nil {
  var ae smithy.APIError
  if errors.As(err, &ae) && ae.ErrorCode() == "AccessDenied" {
   fmt.Println("You don't have permission to list buckets for this account.")
  } else {
   fmt.Printf("Couldn't list buckets for your account. Here's why: %v\n", err)
  }
  return
 }
 if len(result.Buckets) == 0 {
  fmt.Println("You don't have any buckets!")
 } else {
  if count > len(result.Buckets) {
   count = len(result.Buckets)
  }
  for _, bucket := range result.Buckets[:count] {
   fmt.Printf("\t%v\n", *bucket.Name)
  }
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListBuckets」を参照してください。

基本

基本を学ぶ

次のコード例は、以下の操作方法を示しています。

- バケットを作成し、そこにファイルをアップロードします。
- バケットからオブジェクトをダウンロードします。
- バケット内のサブフォルダにオブジェクトをコピーします。
- バケット内のオブジェクトを一覧表示します。
- バケットオブジェクトとバケットを削除します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

シナリオで使用されるバケットアクションとオブジェクトアクションをラップする構造体を定義します。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)
```

```
// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// ListBuckets lists the buckets in the current account.
func (basics BucketBasics) ListBuckets(ctx context.Context) ([]types.Bucket, error)
 {
 var err error
 var output *s3.ListBucketsOutput
 var buckets []types.Bucket
 bucketPaginator := s3.NewListBucketsPaginator(basics.S3Client,
 &s3.ListBucketsInput{})
 for bucketPaginator.HasMorePages() {
  output, err = bucketPaginator.NextPage(ctx)
  if err != nil {
   var apiErr smithy.APIError
   if errors.As(err, &apiErr) && apiErr.ErrorCode() == "AccessDenied" {
    fmt.Println("You don't have permission to list buckets for this account.")
    err = apiErr
   } else {
    log.Printf("Couldn't list buckets for your account. Here's why: %v\n", err)
   }
   break
  } else {
   buckets = append(buckets, output.Buckets...)
  }
 }
 return buckets, err
}



// BucketExists checks whether a bucket exists in the current account.
func (basics BucketBasics) BucketExists(ctx context.Context, bucketName string)
 (bool, error) {
 _, err := basics.S3Client.HeadBucket(ctx, &s3.HeadBucketInput{
  Bucket: aws.String(bucketName),
```

```
 })
 exists := true
 if err != nil {
  var apiError smithy.APIError
  if errors.As(err, &apiError) {
   switch apiError.(type) {
   case *types.NotFound:
    log.Printf("Bucket %v is available.\n", bucketName)
    exists = false
    err = nil
   default:
    log.Printf("Either you don't have access to bucket %v or another error occurred.
 "+
     "Here's what happened: %v\n", bucketName, err)
   }
  }
 } else {
  log.Printf("Bucket %v exists and you already own it.", bucketName)
 }

 return exists, err
}



// CreateBucket creates a bucket with the specified name in the specified Region.
func (basics BucketBasics) CreateBucket(ctx context.Context, name string, region
 string) error {
 _, err := basics.S3Client.CreateBucket(ctx, &s3.CreateBucketInput{
  Bucket: aws.String(name),
  CreateBucketConfiguration: &types.CreateBucketConfiguration{
   LocationConstraint: types.BucketLocationConstraint(region),
  },
 })
 if err != nil {
  var owned *types.BucketAlreadyOwnedByYou
  var exists *types.BucketAlreadyExists
  if errors.As(err, &owned) {
   log.Printf("You already own bucket %s.\n", name)
   err = owned
  } else if errors.As(err, &exists) {
   log.Printf("Bucket %s already exists.\n", name)
   err = exists
  }
```

```
 } else {
  err = s3.NewBucketExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(name)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to exist.\n", name)
  }
 }
 return err
}



// UploadFile reads from a file and puts the data into an object in a bucket.
func (basics BucketBasics) UploadFile(ctx context.Context, bucketName string,
 objectKey string, fileName string) error {
 file, err := os.Open(fileName)
 if err != nil {
  log.Printf("Couldn't open file %v to upload. Here's why: %v\n", fileName, err)
 } else {
  defer file.Close()
  _, err = basics.S3Client.PutObject(ctx, &s3.PutObjectInput{
   Bucket: aws.String(bucketName),
   Key:    aws.String(objectKey),
   Body:   file,
  })
  if err != nil {
   var apiErr smithy.APIError
   if errors.As(err, &apiErr) && apiErr.ErrorCode() == "EntityTooLarge" {
    log.Printf("Error while uploading object to %s. The object is too large.\n"+
     "To upload objects larger than 5GB, use the S3 console (160GB max)\n"+
     "or the multipart upload API (5TB max).", bucketName)
   } else {
    log.Printf("Couldn't upload file %v to %v:%v. Here's why: %v\n",
     fileName, bucketName, objectKey, err)
   }
  } else {
   err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
    ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key:
 aws.String(objectKey)}, time.Minute)
   if err != nil {
    log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
   }
  }
 }
```

```
 return err
}



// UploadLargeObject uses an upload manager to upload data to an object in a bucket.
// The upload manager breaks large data into parts and uploads the parts
 concurrently.
func (basics BucketBasics) UploadLargeObject(ctx context.Context, bucketName string,
 objectKey string, largeObject []byte) error {
 largeBuffer := bytes.NewReader(largeObject)
 var partMiBs int64 = 10
 uploader := manager.NewUploader(basics.S3Client, func(u *manager.Uploader) {
  u.PartSize = partMiBs * 1024 * 1024
 })
 _, err := uploader.Upload(ctx, &s3.PutObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
  Body:   largeBuffer,
 })
 if err != nil {
  var apiErr smithy.APIError
  if errors.As(err, &apiErr) && apiErr.ErrorCode() == "EntityTooLarge" {
   log.Printf("Error while uploading object to %s. The object is too large.\n"+
    "The maximum size for a multipart upload is 5TB.", bucketName)
  } else {
   log.Printf("Couldn't upload large object to %v:%v. Here's why: %v\n",
    bucketName, objectKey, err)
  }
 } else {
  err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key:
 aws.String(objectKey)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
  }
 }

 return err
}



// DownloadFile gets an object from a bucket and stores it in a local file.
```

```
func (basics BucketBasics) DownloadFile(ctx context.Context, bucketName string,
 objectKey string, fileName string) error {
 result, err := basics.S3Client.GetObject(ctx, &s3.GetObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 })
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Can't get object %s from bucket %s. No such key exists.\n",
 objectKey, bucketName)
   err = noKey
  } else {
   log.Printf("Couldn't get object %v:%v. Here's why: %v\n", bucketName, objectKey,
 err)
  }
  return err
 }
 defer result.Body.Close()
 file, err := os.Create(fileName)
 if err != nil {
  log.Printf("Couldn't create file %v. Here's why: %v\n", fileName, err)
  return err
 }
 defer file.Close()
 body, err := io.ReadAll(result.Body)
 if err != nil {
  log.Printf("Couldn't read object body from %v. Here's why: %v\n", objectKey, err)
 }
 _, err = file.Write(body)
 return err
}



// DownloadLargeObject uses a download manager to download an object from a bucket.
// The download manager gets the data in parts and writes them to a buffer until all
 of
// the data has been downloaded.
func (basics BucketBasics) DownloadLargeObject(ctx context.Context, bucketName
 string, objectKey string) ([]byte, error) {
 var partMiBs int64 = 10
 downloader := manager.NewDownloader(basics.S3Client, func(d *manager.Downloader) {
  d.PartSize = partMiBs * 1024 * 1024
```

```
 })
 buffer := manager.NewWriteAtBuffer([]byte{})
 _, err := downloader.Download(ctx, buffer, &s3.GetObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 })
 if err != nil {
  log.Printf("Couldn't download large object from %v:%v. Here's why: %v\n",
   bucketName, objectKey, err)
 }
 return buffer.Bytes(), err
}



// CopyToFolder copies an object in a bucket to a subfolder in the same bucket.
func (basics BucketBasics) CopyToFolder(ctx context.Context, bucketName string,
 objectKey string, folderName string) error {
 objectDest := fmt.Sprintf("%v/%v", folderName, objectKey)
 _, err := basics.S3Client.CopyObject(ctx, &s3.CopyObjectInput{
  Bucket:     aws.String(bucketName),
  CopySource: aws.String(fmt.Sprintf("%v/%v", bucketName, objectKey)),
  Key:        aws.String(objectDest),
 })
 if err != nil {
  var notActive *types.ObjectNotInActiveTierError
  if errors.As(err, &notActive) {
   log.Printf("Couldn't copy object %s from %s because the object isn't in the
 active tier.\n",
    objectKey, bucketName)
   err = notActive
  }
 } else {
  err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key:
 aws.String(objectDest)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist.\n", objectDest)
  }
 }
 return err
}
```

```
// CopyToBucket copies an object in a bucket to another bucket.
func (basics BucketBasics) CopyToBucket(ctx context.Context, sourceBucket string,
 destinationBucket string, objectKey string) error {
 _, err := basics.S3Client.CopyObject(ctx, &s3.CopyObjectInput{
  Bucket:     aws.String(destinationBucket),
  CopySource: aws.String(fmt.Sprintf("%v/%v", sourceBucket, objectKey)),
  Key:        aws.String(objectKey),
 })
 if err != nil {
  var notActive *types.ObjectNotInActiveTierError
  if errors.As(err, &notActive) {
   log.Printf("Couldn't copy object %s from %s because the object isn't in the
 active tier.\n",
    objectKey, sourceBucket)
   err = notActive
  }
 } else {
  err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(destinationBucket), Key:
 aws.String(objectKey)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
  }
 }
 return err
}



// ListObjects lists the objects in a bucket.
func (basics BucketBasics) ListObjects(ctx context.Context, bucketName string)
 ([]types.Object, error) {
 var err error
 var output *s3.ListObjectsV2Output
 input := &s3.ListObjectsV2Input{
  Bucket: aws.String(bucketName),
 }
 var objects []types.Object
 objectPaginator := s3.NewListObjectsV2Paginator(basics.S3Client, input)
 for objectPaginator.HasMorePages() {
  output, err = objectPaginator.NextPage(ctx)
  if err != nil {
   var noBucket *types.NoSuchBucket
```

```
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucketName)
    err = noBucket
   }
   break
  } else {
   objects = append(objects, output.Contents...)
  }
 }
 return objects, err
}



// DeleteObjects deletes a list of objects from a bucket.
func (basics BucketBasics) DeleteObjects(ctx context.Context, bucketName string,
 objectKeys []string) error {
 var objectIds []types.ObjectIdentifier
 for _, key := range objectKeys {
  objectIds = append(objectIds, types.ObjectIdentifier{Key: aws.String(key)})
 }
 output, err := basics.S3Client.DeleteObjects(ctx, &s3.DeleteObjectsInput{
  Bucket: aws.String(bucketName),
  Delete: &types.Delete{Objects: objectIds, Quiet: aws.Bool(true)},
 })
 if err != nil || len(output.Errors) > 0 {
  log.Printf("Error deleting objects from bucket %s.\n", bucketName)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucketName)
    err = noBucket
   }
  } else if len(output.Errors) > 0 {
   for _, outErr := range output.Errors {
    log.Printf("%s: %s\n", *outErr.Key, *outErr.Message)
   }
   err = fmt.Errorf("%s", *output.Errors[0].Message)
  }
 } else {
  for _, delObjs := range output.Deleted {
   err = s3.NewObjectNotExistsWaiter(basics.S3Client).Wait(
    ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key: delObjs.Key},
 time.Minute)
```

```
   if err != nil {
    log.Printf("Failed attempt to wait for object %s to be deleted.\n",
 *delObjs.Key)
   } else {
    log.Printf("Deleted %s.\n", *delObjs.Key)
   }
  }
 }
 return err
}



// DeleteBucket deletes a bucket. The bucket must be empty or an error is returned.
func (basics BucketBasics) DeleteBucket(ctx context.Context, bucketName string)
 error {
 _, err := basics.S3Client.DeleteBucket(ctx, &s3.DeleteBucketInput{
  Bucket: aws.String(bucketName)})
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucketName)
   err = noBucket
  } else {
   log.Printf("Couldn't delete bucket %v. Here's why: %v\n", bucketName, err)
  }
 } else {
  err = s3.NewBucketNotExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(bucketName)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to be deleted.\n", bucketName)
  } else {
   log.Printf("Deleted %s.\n", bucketName)
  }
 }
 return err
}
```

S3 バケットとオブジェクトの操作方法を示すインタラクティブなシナリオを実行します。

```
import (
 "context"
 "fmt"
 "log"
 "os"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/s3/actions"
)

// RunGetStartedScenario is an interactive example that shows you how to use Amazon
// Simple Storage Service (Amazon S3) to create an S3 bucket and use it to store
 objects.
//
// 1. Create a bucket.
// 2. Upload a local file to the bucket.
// 3. Download an object to a local file.
// 4. Copy an object to a different folder in the bucket.
// 5. List objects in the bucket.
// 6. Delete all objects in the bucket.
// 7. Delete the bucket.
//
// This example creates an Amazon S3 service client from the specified sdkConfig so
 that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
func RunGetStartedScenario(ctx context.Context, sdkConfig aws.Config, questioner
 demotools.IQuestioner) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   _, isMock := questioner.(*demotools.MockQuestioner)
   if isMock || questioner.AskBool("Do you want to see the full error message (y/
n)?", "y") {
    log.Println(r)
   }
  }
 }()
```

```
log.Println(strings.Repeat("-", 88))
log.Println("Welcome to the Amazon S3 getting started demo.")
log.Println(strings.Repeat("-", 88))

s3Client := s3.NewFromConfig(sdkConfig)
bucketBasics := actions.BucketBasics{S3Client: s3Client}

count := 10
log.Printf("Let's list up to %v buckets for your account:", count)
buckets, err := bucketBasics.ListBuckets(ctx)
if err != nil {
 panic(err)
}
if len(buckets) == 0 {
 log.Println("You don't have any buckets!")
} else {
 if count > len(buckets) {
  count = len(buckets)
 }
 for _, bucket := range buckets[:count] {
  log.Printf("\t%v\n", *bucket.Name)
 }
}

bucketName := questioner.Ask("Let's create a bucket. Enter a name for your
bucket:",
 demotools.NotEmpty{})
bucketExists, err := bucketBasics.BucketExists(ctx, bucketName)
if err != nil {
 panic(err)
}
if !bucketExists {
 err = bucketBasics.CreateBucket(ctx, bucketName, sdkConfig.Region)
 if err != nil {
  panic(err)
 } else {
  log.Println("Bucket created.")
 }
}
log.Println(strings.Repeat("-", 88))

fmt.Println("Let's upload a file to your bucket.")
smallFile := questioner.Ask("Enter the path to a file you want to upload:",
```

```
 demotools.NotEmpty{})
const smallKey = "doc-example-key"
err = bucketBasics.UploadFile(ctx, bucketName, smallKey, smallFile)
if err != nil {
 panic(err)
}
log.Printf("Uploaded %v as %v.\n", smallFile, smallKey)
log.Println(strings.Repeat("-", 88))

log.Printf("Let's download %v to a file.", smallKey)
downloadFileName := questioner.Ask("Enter a name for the downloaded file:",
demotools.NotEmpty{})
err = bucketBasics.DownloadFile(ctx, bucketName, smallKey, downloadFileName)
if err != nil {
 panic(err)
}
log.Printf("File %v downloaded.", downloadFileName)
log.Println(strings.Repeat("-", 88))

log.Printf("Let's copy %v to a folder in the same bucket.", smallKey)
folderName := questioner.Ask("Enter a folder name: ", demotools.NotEmpty{})
err = bucketBasics.CopyToFolder(ctx, bucketName, smallKey, folderName)
if err != nil {
 panic(err)
}
log.Printf("Copied %v to %v/%v.\n", smallKey, folderName, smallKey)
log.Println(strings.Repeat("-", 88))

log.Println("Let's list the objects in your bucket.")
questioner.Ask("Press Enter when you're ready.")
objects, err := bucketBasics.ListObjects(ctx, bucketName)
if err != nil {
 panic(err)
}
log.Printf("Found %v objects.\n", len(objects))
var objKeys []string
for _, object := range objects {
 objKeys = append(objKeys, *object.Key)
 log.Printf("\t%v\n", *object.Key)
}
log.Println(strings.Repeat("-", 88))

if questioner.AskBool("Do you want to delete your bucket and all of its "+
 "contents? (y/n)", "y") {
```

```
  log.Println("Deleting objects.")
  err = bucketBasics.DeleteObjects(ctx, bucketName, objKeys)
  if err != nil {
   panic(err)
  }
  log.Println("Deleting bucket.")
  err = bucketBasics.DeleteBucket(ctx, bucketName)
  if err != nil {
   panic(err)
  }
  log.Printf("Deleting downloaded file %v.\n", downloadFileName)
  err = os.Remove(downloadFileName)
  if err != nil {
   panic(err)
  }
 } else {
  log.Println("Okay. Don't forget to delete objects from your bucket to avoid
 charges.")
 }
 log.Println(strings.Repeat("-", 88))

 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - CopyObject
  - CreateBucket
  - DeleteBucket
  - DeleteObjects
  - GetObject
  - ListObjectsV2
  - PutObject

アクション

CopyObject

次のコード例は、CopyObject を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}
```

```
// CopyToBucket copies an object in a bucket to another bucket.
func (basics BucketBasics) CopyToBucket(ctx context.Context, sourceBucket string,
 destinationBucket string, objectKey string) error {
 _, err := basics.S3Client.CopyObject(ctx, &s3.CopyObjectInput{
  Bucket:     aws.String(destinationBucket),
  CopySource: aws.String(fmt.Sprintf("%v/%v", sourceBucket, objectKey)),
  Key:        aws.String(objectKey),
 })
 if err != nil {
  var notActive *types.ObjectNotInActiveTierError
  if errors.As(err, &notActive) {
   log.Printf("Couldn't copy object %s from %s because the object isn't in the
 active tier.\n",
    objectKey, sourceBucket)
   err = notActive
  }
 } else {
  err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(destinationBucket), Key:
 aws.String(objectKey)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
  }
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CopyObject」を参照してください。

`CreateBucket`

次のコード例は、`CreateBucket` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

デフォルト設定を使用してバケットを作成します。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// CreateBucket creates a bucket with the specified name in the specified Region.
func (basics BucketBasics) CreateBucket(ctx context.Context, name string, region
 string) error {
 _, err := basics.S3Client.CreateBucket(ctx, &s3.CreateBucketInput{
  Bucket: aws.String(name),
```

```
  CreateBucketConfiguration: &types.CreateBucketConfiguration{
   LocationConstraint: types.BucketLocationConstraint(region),
  },
 })
 if err != nil {
  var owned *types.BucketAlreadyOwnedByYou
  var exists *types.BucketAlreadyExists
  if errors.As(err, &owned) {
   log.Printf("You already own bucket %s.\n", name)
   err = owned
  } else if errors.As(err, &exists) {
   log.Printf("Bucket %s already exists.\n", name)
   err = exists
  }
 } else {
  err = s3.NewBucketExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(name)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to exist.\n", name)
  }
 }
 return err
}
```

オブジェクトロックを使用してバケットを作成し、作成が完了するまで待ちます。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)
```

```
// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// CreateBucketWithLock creates a new S3 bucket with optional object locking enabled
// and waits for the bucket to exist before returning.
func (actor S3Actions) CreateBucketWithLock(ctx context.Context, bucket string,
 region string, enableObjectLock bool) (string, error) {
 input := &s3.CreateBucketInput{
  Bucket: aws.String(bucket),
  CreateBucketConfiguration: &types.CreateBucketConfiguration{
   LocationConstraint: types.BucketLocationConstraint(region),
  },
 }

 if enableObjectLock {
  input.ObjectLockEnabledForBucket = aws.Bool(true)
 }

 _, err := actor.S3Client.CreateBucket(ctx, input)
 if err != nil {
  var owned *types.BucketAlreadyOwnedByYou
  var exists *types.BucketAlreadyExists
  if errors.As(err, &owned) {
   log.Printf("You already own bucket %s.\n", bucket)
   err = owned
  } else if errors.As(err, &exists) {
   log.Printf("Bucket %s already exists.\n", bucket)
   err = exists
  }
 } else {
  err = s3.NewBucketExistsWaiter(actor.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(bucket)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to exist.\n", bucket)
  }
 }

 return bucket, err
```

```
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateBucket」を参照してください。

`DeleteBucket`

次のコード例は、`DeleteBucket` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
```

```
type BucketBasics struct {
 S3Client *s3.Client
}



// DeleteBucket deletes a bucket. The bucket must be empty or an error is returned.
func (basics BucketBasics) DeleteBucket(ctx context.Context, bucketName string)
 error {
 _, err := basics.S3Client.DeleteBucket(ctx, &s3.DeleteBucketInput{
  Bucket: aws.String(bucketName)})
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucketName)
   err = noBucket
  } else {
   log.Printf("Couldn't delete bucket %v. Here's why: %v\n", bucketName, err)
  }
 } else {
  err = s3.NewBucketNotExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(bucketName)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to be deleted.\n", bucketName)
  } else {
   log.Printf("Deleted %s.\n", bucketName)
  }
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteBucket」を参照してください。

DeleteObject

次のコード例は、DeleteObject を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// DeleteObject deletes an object from a bucket.
func (actor S3Actions) DeleteObject(ctx context.Context, bucket string, key string,
 versionId string, bypassGovernance bool) (bool, error) {
 deleted := false
 input := &s3.DeleteObjectInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
 }
 if versionId != "" {
  input.VersionId = aws.String(versionId)
```

```
 }
 if bypassGovernance {
  input.BypassGovernanceRetention = aws.Bool(true)
 }
 _, err := actor.S3Client.DeleteObject(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in %s.\n", key, bucket)
   err = noKey
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "AccessDenied":
    log.Printf("Access denied: cannot delete object %s from %s.\n", key, bucket)
    err = nil
   case "InvalidArgument":
    if bypassGovernance {
     log.Printf("You cannot specify bypass governance on a bucket without lock
enabled.")
     err = nil
    }
   }
  }
 } else {
  err = s3.NewObjectNotExistsWaiter(actor.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(bucket), Key: aws.String(key)},
time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s in bucket %s to be deleted.\n",
key, bucket)
  } else {
   deleted = true
  }
 }
 return deleted, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteObject」を参照してください。

`DeleteObjects`

次のコード例は、`DeleteObjects` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// DeleteObjects deletes a list of objects from a bucket.
func (actor S3Actions) DeleteObjects(ctx context.Context, bucket string, objects
 []types.ObjectIdentifier, bypassGovernance bool) error {
 if len(objects) == 0 {
  return nil
 }
```

```
 input := s3.DeleteObjectsInput{
  Bucket: aws.String(bucket),
  Delete: &types.Delete{
   Objects: objects,
   Quiet:   aws.Bool(true),
  },
 }
 if bypassGovernance {
  input.BypassGovernanceRetention = aws.Bool(true)
 }
 delOut, err := actor.S3Client.DeleteObjects(ctx, &input)
 if err != nil || len(delOut.Errors) > 0 {
  log.Printf("Error deleting objects from bucket %s.\n", bucket)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucket)
    err = noBucket
   }
  } else if len(delOut.Errors) > 0 {
   for _, outErr := range delOut.Errors {
    log.Printf("%s: %s\n", *outErr.Key, *outErr.Message)
   }
   err = fmt.Errorf("%s", *delOut.Errors[0].Message)
  }
 } else {
  for _, delObjs := range delOut.Deleted {
   err = s3.NewObjectNotExistsWaiter(actor.S3Client).Wait(
    ctx, &s3.HeadObjectInput{Bucket: aws.String(bucket), Key: delObjs.Key},
 time.Minute)
   if err != nil {
    log.Printf("Failed attempt to wait for object %s to be deleted.\n",
 *delObjs.Key)
   } else {
    log.Printf("Deleted %s.\n", *delObjs.Key)
   }
  }
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteObjects」を参照してください。

`GetObject`

次のコード例は、`GetObject` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}
```

```
// DownloadFile gets an object from a bucket and stores it in a local file.
func (basics BucketBasics) DownloadFile(ctx context.Context, bucketName string,
 objectKey string, fileName string) error {
 result, err := basics.S3Client.GetObject(ctx, &s3.GetObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 })
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Can't get object %s from bucket %s. No such key exists.\n",
 objectKey, bucketName)
   err = noKey
  } else {
   log.Printf("Couldn't get object %v:%v. Here's why: %v\n", bucketName, objectKey,
 err)
  }
  return err
 }
 defer result.Body.Close()
 file, err := os.Create(fileName)
 if err != nil {
  log.Printf("Couldn't create file %v. Here's why: %v\n", fileName, err)
  return err
 }
 defer file.Close()
 body, err := io.ReadAll(result.Body)
 if err != nil {
  log.Printf("Couldn't read object body from %v. Here's why: %v\n", objectKey, err)
 }
 _, err = file.Write(body)
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「GetObject」を参照してください。

GetObjectLegalHold

次のコード例は、GetObjectLegalHold を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// GetObjectLegalHold retrieves the legal hold status for an S3 object.
func (actor S3Actions) GetObjectLegalHold(ctx context.Context, bucket string, key
 string, versionId string) (*types.ObjectLockLegalHoldStatus, error) {
 var status *types.ObjectLockLegalHoldStatus
 input := &s3.GetObjectLegalHoldInput{
  Bucket:    aws.String(bucket),
  Key:       aws.String(key),
  VersionId: aws.String(versionId),
 }
```

```
 output, err := actor.S3Client.GetObjectLegalHold(ctx, input)
 if err != nil {
  var noSuchKeyErr *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noSuchKeyErr) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noSuchKeyErr
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "NoSuchObjectLockConfiguration":
    log.Printf("Object %s does not have an object lock configuration.\n", key)
    err = nil
   case "InvalidRequest":
    log.Printf("Bucket %s does not have an object lock configuration.\n", bucket)
    err = nil
   }
  }
 } else {
  status = &output.LegalHold.Status
 }

 return status, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「GetObjectLegalHold」を参照してください。

`GetObjectLockConfiguration`

次のコード例は、`GetObjectLockConfiguration` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// GetObjectLockConfiguration retrieves the object lock configuration for an S3
 bucket.
func (actor S3Actions) GetObjectLockConfiguration(ctx context.Context, bucket
 string) (*types.ObjectLockConfiguration, error) {
 var lockConfig *types.ObjectLockConfiguration
 input := &s3.GetObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
 }

 output, err := actor.S3Client.GetObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  } else if errors.As(err, &apiErr) && apiErr.ErrorCode() ==
 "ObjectLockConfigurationNotFoundError" {
   log.Printf("Bucket %s does not have an object lock configuration.\n", bucket)
```

```
    err = nil
   }
  } else {
   lockConfig = output.ObjectLockConfiguration
  }

  return lockConfig, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「GetObjectLockConfiguration」を参照してください。

`GetObjectRetention`

次のコード例は、`GetObjectRetention` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)
```

```
// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// GetObjectRetention retrieves the object retention configuration for an S3 object.
func (actor S3Actions) GetObjectRetention(ctx context.Context, bucket string, key
 string) (*types.ObjectLockRetention, error) {
 var retention *types.ObjectLockRetention
 input := &s3.GetObjectRetentionInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
 }

 output, err := actor.S3Client.GetObjectRetention(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "NoSuchObjectLockConfiguration":
    err = nil
   case "InvalidRequest":
    log.Printf("Bucket %s does not have locking enabled.", bucket)
    err = nil
   }
  }
 } else {
  retention = output.Retention
 }

 return retention, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「GetObjectRetention」を参照してください。

`HeadBucket`

次のコード例は、HeadBucket を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}
```

```
// BucketExists checks whether a bucket exists in the current account.
func (basics BucketBasics) BucketExists(ctx context.Context, bucketName string)
 (bool, error) {
 _, err := basics.S3Client.HeadBucket(ctx, &s3.HeadBucketInput{
  Bucket: aws.String(bucketName),
 })
 exists := true
 if err != nil {
  var apiError smithy.APIError
  if errors.As(err, &apiError) {
   switch apiError.(type) {
   case *types.NotFound:
    log.Printf("Bucket %v is available.\n", bucketName)
    exists = false
    err = nil
   default:
    log.Printf("Either you don't have access to bucket %v or another error occurred.
 "+
     "Here's what happened: %v\n", bucketName, err)
   }
  }
 } else {
  log.Printf("Bucket %v exists and you already own it.", bucketName)
 }

 return exists, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「HeadBucket」を参照してください。

ListBuckets

次のコード例は、ListBuckets を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// ListBuckets lists the buckets in the current account.
func (basics BucketBasics) ListBuckets(ctx context.Context) ([]types.Bucket, error)
 {
 var err error
 var output *s3.ListBucketsOutput
 var buckets []types.Bucket
```

```
 bucketPaginator := s3.NewListBucketsPaginator(basics.S3Client,
 &s3.ListBucketsInput{})
 for bucketPaginator.HasMorePages() {
  output, err = bucketPaginator.NextPage(ctx)
  if err != nil {
   var apiErr smithy.APIError
   if errors.As(err, &apiErr) && apiErr.ErrorCode() == "AccessDenied" {
    fmt.Println("You don't have permission to list buckets for this account.")
    err = apiErr
   } else {
    log.Printf("Couldn't list buckets for your account. Here's why: %v\n", err)
   }
   break
  } else {
   buckets = append(buckets, output.Buckets...)
  }
 }
 return buckets, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListBuckets」を参照してください。

`ListObjectVersions`

次のコード例は、`ListObjectVersions` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
```

```
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// ListObjectVersions lists all versions of all objects in a bucket.
func (actor S3Actions) ListObjectVersions(ctx context.Context, bucket string)
 ([]types.ObjectVersion, error) {
 var err error
 var output *s3.ListObjectVersionsOutput
 var versions []types.ObjectVersion
 input := &s3.ListObjectVersionsInput{Bucket: aws.String(bucket)}
 versionPaginator := s3.NewListObjectVersionsPaginator(actor.S3Client, input)
 for versionPaginator.HasMorePages() {
  output, err = versionPaginator.NextPage(ctx)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucket)
    err = noBucket
   }
   break
  } else {
   versions = append(versions, output.Versions...)
  }
 }
 return versions, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ListObjectVersions」を参照してください。

`ListObjectsV2`

次のコード例は、`ListObjectsV2` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
```

```
}



// ListObjects lists the objects in a bucket.
func (basics BucketBasics) ListObjects(ctx context.Context, bucketName string)
 ([]types.Object, error) {
 var err error
 var output *s3.ListObjectsV2Output
 input := &s3.ListObjectsV2Input{
  Bucket: aws.String(bucketName),
 }
 var objects []types.Object
 objectPaginator := s3.NewListObjectsV2Paginator(basics.S3Client, input)
 for objectPaginator.HasMorePages() {
  output, err = objectPaginator.NextPage(ctx)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucketName)
    err = noBucket
   }
   break
  } else {
   objects = append(objects, output.Contents...)
  }
 }
 return objects, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListObjectsV2」を参照してください。

PutObject

次のコード例は、PutObject を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

低レベル API を使用してオブジェクトをバケットに配置します。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// UploadFile reads from a file and puts the data into an object in a bucket.
func (basics BucketBasics) UploadFile(ctx context.Context, bucketName string,
 objectKey string, fileName string) error {
 file, err := os.Open(fileName)
 if err != nil {
```

```
  log.Printf("Couldn't open file %v to upload. Here's why: %v\n", fileName, err)
 } else {
  defer file.Close()
  _, err = basics.S3Client.PutObject(ctx, &s3.PutObjectInput{
   Bucket: aws.String(bucketName),
   Key:    aws.String(objectKey),
   Body:   file,
  })
  if err != nil {
   var apiErr smithy.APIError
   if errors.As(err, &apiErr) && apiErr.ErrorCode() == "EntityTooLarge" {
    log.Printf("Error while uploading object to %s. The object is too large.\n"+
     "To upload objects larger than 5GB, use the S3 console (160GB max)\n"+
     "or the multipart upload API (5TB max).", bucketName)
   } else {
    log.Printf("Couldn't upload file %v to %v:%v. Here's why: %v\n",
     fileName, bucketName, objectKey, err)
   }
  } else {
   err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
    ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key:
 aws.String(objectKey)}, time.Minute)
   if err != nil {
    log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
   }
  }
 }
 return err
}
```

Transfer Manager を使用してオブジェクトをバケットにアップロードします。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// UploadObject uses the S3 upload manager to upload an object to a bucket.
func (actor S3Actions) UploadObject(ctx context.Context, bucket string, key string,
 contents string) (string, error) {
 var outKey string
 input := &s3.PutObjectInput{
  Bucket:            aws.String(bucket),
  Key:               aws.String(key),
  Body:              bytes.NewReader([]byte(contents)),
  ChecksumAlgorithm: types.ChecksumAlgorithmSha256,
 }
 output, err := actor.S3Manager.Upload(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 } else {
  err := s3.NewObjectExistsWaiter(actor.S3Client).Wait(ctx, &s3.HeadObjectInput{
   Bucket: aws.String(bucket),
   Key:    aws.String(key),
  }, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist in %s.\n", key, bucket)
  } else {
   outKey = *output.Key
  }
 }
 return outKey, err
```

```
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「PutObject」を参照してください。

`PutObjectLegalHold`

次のコード例は、`PutObjectLegalHold` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}
```

```
// PutObjectLegalHold sets the legal hold configuration for an S3 object.
func (actor S3Actions) PutObjectLegalHold(ctx context.Context, bucket string, key
 string, versionId string, legalHoldStatus types.ObjectLockLegalHoldStatus) error {
 input := &s3.PutObjectLegalHoldInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
  LegalHold: &types.ObjectLockLegalHold{
   Status: legalHoldStatus,
  },
 }
 if versionId != "" {
  input.VersionId = aws.String(versionId)
 }

 _, err := actor.S3Client.PutObjectLegalHold(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  }
 }

 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「PutObjectLegalHold」を参照してください。

PutObjectLockConfiguration

次のコード例は、PutObjectLockConfiguration を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

バケットのオブジェクトロック設定を指定します。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// EnableObjectLockOnBucket enables object locking on an existing bucket.
func (actor S3Actions) EnableObjectLockOnBucket(ctx context.Context, bucket string)
 error {
 // Versioning must be enabled on the bucket before object locking is enabled.
 verInput := &s3.PutBucketVersioningInput{
  Bucket: aws.String(bucket),
  VersioningConfiguration: &types.VersioningConfiguration{
   MFADelete: types.MFADeleteDisabled,
   Status:    types.BucketVersioningStatusEnabled,
```

```
  },
 }
 _, err := actor.S3Client.PutBucketVersioning(ctx, verInput)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
  return err
 }

 input := &s3.PutObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
  ObjectLockConfiguration: &types.ObjectLockConfiguration{
   ObjectLockEnabled: types.ObjectLockEnabledEnabled,
  },
 }
 _, err = actor.S3Client.PutObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 }

 return err
}
```

バケットのデフォルトの保存期間を設定します。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"
```

```
 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// ModifyDefaultBucketRetention modifies the default retention period of an existing
 bucket.
func (actor S3Actions) ModifyDefaultBucketRetention(
 ctx context.Context, bucket string, lockMode types.ObjectLockEnabled,
 retentionPeriod int32, retentionMode types.ObjectLockRetentionMode) error {

 input := &s3.PutObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
  ObjectLockConfiguration: &types.ObjectLockConfiguration{
   ObjectLockEnabled: lockMode,
   Rule: &types.ObjectLockRule{
    DefaultRetention: &types.DefaultRetention{
     Days: aws.Int32(retentionPeriod),
     Mode: retentionMode,
    },
   },
  },
 }
 _, err := actor.S3Client.PutObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 }

 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「PutObjectLockConfiguration」を参照してください。

`PutObjectRetention`

次のコード例は、`PutObjectRetention` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}
```

```
// PutObjectRetention sets the object retention configuration for an S3 object.
func (actor S3Actions) PutObjectRetention(ctx context.Context, bucket string, key
 string, retentionMode types.ObjectLockRetentionMode, retentionPeriodDays int32)
 error {
 input := &s3.PutObjectRetentionInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
  Retention: &types.ObjectLockRetention{
   Mode:            retentionMode,
   RetainUntilDate: aws.Time(time.Now().AddDate(0, 0, int(retentionPeriodDays))),
  },
  BypassGovernanceRetention: aws.Bool(true),
 }

 _, err := actor.S3Client.PutObjectRetention(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  }
 }

 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「PutObjectRetention」を参照してください。

シナリオ

署名付き URL を作成する

次のコード例は、Amazon S3 の署名付き URL を作成し、オブジェクトをアップロードする方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

S3 署名アクションをラップする関数を作成します。

```
import (
 "context"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 v4 "github.com/aws/aws-sdk-go-v2/aws/signer/v4"
 "github.com/aws/aws-sdk-go-v2/service/s3"
)

// Presigner encapsulates the Amazon Simple Storage Service (Amazon S3) presign
 actions
// used in the examples.
// It contains PresignClient, a client that is used to presign requests to Amazon
 S3.
// Presigned requests contain temporary credentials and can be made from any HTTP
 client.
type Presigner struct {
 PresignClient *s3.PresignClient
}



// GetObject makes a presigned request that can be used to get an object from a
 bucket.
// The presigned request is valid for the specified number of seconds.
func (presigner Presigner) GetObject(
 ctx context.Context, bucketName string, objectKey string, lifetimeSecs int64)
 (*v4.PresignedHTTPRequest, error) {
 request, err := presigner.PresignClient.PresignGetObject(ctx, &s3.GetObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
```

```
 }, func(opts *s3.PresignOptions) {
  opts.Expires = time.Duration(lifetimeSecs * int64(time.Second))
 })
 if err != nil {
  log.Printf("Couldn't get a presigned request to get %v:%v. Here's why: %v\n",
   bucketName, objectKey, err)
 }
 return request, err
}



// PutObject makes a presigned request that can be used to put an object in a
 bucket.
// The presigned request is valid for the specified number of seconds.
func (presigner Presigner) PutObject(
 ctx context.Context, bucketName string, objectKey string, lifetimeSecs int64)
 (*v4.PresignedHTTPRequest, error) {
 request, err := presigner.PresignClient.PresignPutObject(ctx, &s3.PutObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 }, func(opts *s3.PresignOptions) {
  opts.Expires = time.Duration(lifetimeSecs * int64(time.Second))
 })
 if err != nil {
  log.Printf("Couldn't get a presigned request to put %v:%v. Here's why: %v\n",
   bucketName, objectKey, err)
 }
 return request, err
}



// DeleteObject makes a presigned request that can be used to delete an object from
 a bucket.
func (presigner Presigner) DeleteObject(ctx context.Context, bucketName string,
 objectKey string) (*v4.PresignedHTTPRequest, error) {
 request, err := presigner.PresignClient.PresignDeleteObject(ctx,
 &s3.DeleteObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 })
 if err != nil {
```

```
  log.Printf("Couldn't get a presigned request to delete object %v. Here's why: %v
\n", objectKey, err)
 }
 return request, err
}



func (presigner Presigner) PresignPostObject(ctx context.Context, bucketName string,
 objectKey string, lifetimeSecs int64) (*s3.PresignedPostRequest, error) {
 request, err := presigner.PresignClient.PresignPostObject(ctx, &s3.PutObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 }, func(options *s3.PresignPostOptions) {
  options.Expires = time.Duration(lifetimeSecs) * time.Second
 })
 if err != nil {
  log.Printf("Couldn't get a presigned post request to put %v:%v. Here's why: %v\n",
 bucketName, objectKey, err)
 }
 return request, nil
}
```

署名付き URL を生成して使用し、S3 オブジェクトをアップロード、ダウンロード、削除するインタラクティブな例を実行します。

```
import (
 "bytes"
 "context"
 "io"
 "log"
 "mime/multipart"
 "net/http"
 "os"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
```

```
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/s3/actions"
)



// RunPresigningScenario is an interactive example that shows you how to get
 presigned
// HTTP requests that you can use to move data into and out of Amazon Simple Storage
// Service (Amazon S3). The presigned requests contain temporary credentials and can
// be used by an HTTP client.
//
// 1. Get a presigned request to put an object in a bucket.
// 2. Use the net/http package to use the presigned request to upload a local file
 to the bucket.
// 3. Get a presigned request to get an object from a bucket.
// 4. Use the net/http package to use the presigned request to download the object
 to a local file.
// 5. Get a presigned request to delete an object from a bucket.
// 6. Use the net/http package to use the presigned request to delete the object.
//
// This example creates an Amazon S3 presign client from the specified sdkConfig so
 that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
//
// It uses an IHttpRequester interface to abstract HTTP requests so they can be
 mocked
// during testing.
func RunPresigningScenario(ctx context.Context, sdkConfig aws.Config, questioner
 demotools.IQuestioner, httpRequester IHttpRequester) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   _, isMock := questioner.(*demotools.MockQuestioner)
   if isMock || questioner.AskBool("Do you want to see the full error message (y/
n)?", "y") {
    log.Println(r)
   }
  }
 }()
```

```
log.Println(strings.Repeat("-", 88))
log.Println("Welcome to the Amazon S3 presigning demo.")
log.Println(strings.Repeat("-", 88))

s3Client := s3.NewFromConfig(sdkConfig)
bucketBasics := actions.BucketBasics{S3Client: s3Client}
presignClient := s3.NewPresignClient(s3Client)
presigner := actions.Presigner{PresignClient: presignClient}

bucketName := questioner.Ask("We'll need a bucket. Enter a name for a bucket "+
 "you own or one you want to create:", demotools.NotEmpty{})
bucketExists, err := bucketBasics.BucketExists(ctx, bucketName)
if err != nil {
 panic(err)
}
if !bucketExists {
 err = bucketBasics.CreateBucket(ctx, bucketName, sdkConfig.Region)
 if err != nil {
  panic(err)
 } else {
  log.Println("Bucket created.")
 }
}
log.Println(strings.Repeat("-", 88))

log.Printf("Let's presign a request to upload a file to your bucket.")
uploadFilename := questioner.Ask("Enter the path to a file you want to upload:",
 demotools.NotEmpty{})
uploadKey := questioner.Ask("What would you like to name the uploaded object?",
 demotools.NotEmpty{})
uploadFile, err := os.Open(uploadFilename)
if err != nil {
 panic(err)
}
defer uploadFile.Close()
presignedPutRequest, err := presigner.PutObject(ctx, bucketName, uploadKey, 60)
if err != nil {
 panic(err)
}
log.Printf("Got a presigned %v request to URL:\n\t%v\n",
presignedPutRequest.Method,
 presignedPutRequest.URL)
log.Println("Using net/http to send the request...")
info, err := uploadFile.Stat()
```

```
if err != nil {
 panic(err)
}
putResponse, err := httpRequester.Put(presignedPutRequest.URL, info.Size(),
uploadFile)
if err != nil {
 panic(err)
}
log.Printf("%v object %v with presigned URL returned %v.",
presignedPutRequest.Method,
 uploadKey, putResponse.StatusCode)
log.Println(strings.Repeat("-", 88))

log.Printf("Let's presign a request to download the object.")
questioner.Ask("Press Enter when you're ready.")
presignedGetRequest, err := presigner.GetObject(ctx, bucketName, uploadKey, 60)
if err != nil {
 panic(err)
}
log.Printf("Got a presigned %v request to URL:\n\t%v\n",
presignedGetRequest.Method,
 presignedGetRequest.URL)
log.Println("Using net/http to send the request...")
getResponse, err := httpRequester.Get(presignedGetRequest.URL)
if err != nil {
 panic(err)
}
log.Printf("%v object %v with presigned URL returned %v.",
presignedGetRequest.Method,
 uploadKey, getResponse.StatusCode)
defer getResponse.Body.Close()
downloadBody, err := io.ReadAll(getResponse.Body)
if err != nil {
 panic(err)
}
log.Printf("Downloaded %v bytes. Here are the first 100 of them:\n",
len(downloadBody))
log.Println(strings.Repeat("-", 88))
log.Println(string(downloadBody[:100]))
log.Println(strings.Repeat("-", 88))

log.Println("Now we'll create a new request to put the same object using a
presigned post request")
questioner.Ask("Press Enter when you're ready.")
```

```
 presignPostRequest, err := presigner.PresignPostObject(ctx, bucketName, uploadKey,
 60)
 if err != nil {
  panic(err)
 }
 log.Printf("Got a presigned post request to url %v with values %v\n",
 presignPostRequest.URL, presignPostRequest.Values)
 log.Println("Using net/http multipart to send the request...")
 uploadFile, err = os.Open(uploadFilename)
 if err != nil {
  panic(err)
 }
 defer uploadFile.Close()
 multiPartResponse, err := sendMultipartRequest(presignPostRequest.URL,
 presignPostRequest.Values, uploadFile, uploadKey, httpRequester)
 if err != nil {
  panic(err)
 }
 log.Printf("Presign post object %v with presigned URL returned %v.", uploadKey,
 multiPartResponse.StatusCode)

 log.Println("Let's presign a request to delete the object.")
 questioner.Ask("Press Enter when you're ready.")
 presignedDelRequest, err := presigner.DeleteObject(ctx, bucketName, uploadKey)
 if err != nil {
  panic(err)
 }
 log.Printf("Got a presigned %v request to URL:\n\t%v\n",
 presignedDelRequest.Method,
  presignedDelRequest.URL)
 log.Println("Using net/http to send the request...")
 delResponse, err := httpRequester.Delete(presignedDelRequest.URL)
 if err != nil {
  panic(err)
 }
 log.Printf("%v object %v with presigned URL returned %v.\n",
 presignedDelRequest.Method,
  uploadKey, delResponse.StatusCode)
 log.Println(strings.Repeat("-", 88))

 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

この例で HTTP リクエストを行うために使用する HTTP リクエストラッパーを定義します。

```
// IHttpRequester abstracts HTTP requests into an interface so it can be mocked
 during
// unit testing.
type IHttpRequester interface {
 Get(url string) (resp *http.Response, err error)
 Post(url, contentType string, body io.Reader) (resp *http.Response, err error)
 Put(url string, contentLength int64, body io.Reader) (resp *http.Response, err
 error)
 Delete(url string) (resp *http.Response, err error)
}

// HttpRequester uses the net/http package to make HTTP requests during the
 scenario.
type HttpRequester struct{}

func (httpReq HttpRequester) Get(url string) (resp *http.Response, err error) {
 return http.Get(url)
}
func (httpReq HttpRequester) Post(url, contentType string, body io.Reader) (resp
 *http.Response, err error) {
 postRequest, err := http.NewRequest("POST", url, body)
 if err != nil {
  return nil, err
 }
 postRequest.Header.Set("Content-Type", contentType)
 return http.DefaultClient.Do(postRequest)
}

func (httpReq HttpRequester) Put(url string, contentLength int64, body io.Reader)
 (resp *http.Response, err error) {
 putRequest, err := http.NewRequest("PUT", url, body)
 if err != nil {
  return nil, err
 }
 putRequest.ContentLength = contentLength
 return http.DefaultClient.Do(putRequest)
}
func (httpReq HttpRequester) Delete(url string) (resp *http.Response, err error) {
```

```
 delRequest, err := http.NewRequest("DELETE", url, nil)
 if err != nil {
  return nil, err
 }
 return http.DefaultClient.Do(delRequest)
}
```

Amazon S3 オブジェクトをロックする

次のコード例は、S3 オブジェクトロック機能を操作する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

Amazon S3 オブジェクトロック機能を示すインタラクティブなシナリオを実行します。

```
import (
 "context"
 "fmt"
 "log"
 "strings"

 "s3_object_lock/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// ObjectLockScenario contains the steps to run the S3 Object Lock workflow.
type ObjectLockScenario struct {
 questioner demotools.IQuestioner
```

```
 resources  Resources
 s3Actions  *actions.S3Actions
 sdkConfig  aws.Config
}

// NewObjectLockScenario constructs a new ObjectLockScenario instance.
func NewObjectLockScenario(sdkConfig aws.Config, questioner demotools.IQuestioner)
 ObjectLockScenario {
 scenario := ObjectLockScenario{
  questioner: questioner,
  resources:  Resources{},
  s3Actions:  &actions.S3Actions{S3Client: s3.NewFromConfig(sdkConfig)},
  sdkConfig:  sdkConfig,
 }
 scenario.s3Actions.S3Manager = manager.NewUploader(scenario.s3Actions.S3Client)
 scenario.resources.init(scenario.s3Actions, questioner)
 return scenario
}

type nameLocked struct {
 name   string
 locked bool
}

var createInfo = []nameLocked{
 {"standard-bucket", false},
 {"lock-bucket", true},
 {"retention-bucket", false},
}

// CreateBuckets creates the S3 buckets required for the workflow.
func (scenario *ObjectLockScenario) CreateBuckets(ctx context.Context) {
 log.Println("Let's create some S3 buckets to use for this workflow.")
 success := false
 for !success {
  prefix := scenario.questioner.Ask(
   "This example creates three buckets. Enter a prefix to name your buckets
 (remember bucket names must be globally unique):")

  for _, info := range createInfo {
   log.Println(fmt.Sprintf("%s.%s", prefix, info.name))
   bucketName, err := scenario.s3Actions.CreateBucketWithLock(ctx, fmt.Sprintf("%s.
%s", prefix, info.name), scenario.sdkConfig.Region, info.locked)
   if err != nil {
```

```
    switch err.(type) {
    case *types.BucketAlreadyExists, *types.BucketAlreadyOwnedByYou:
     log.Printf("Couldn't create bucket %s.\n", bucketName)
    default:
     panic(err)
    }
    break
   }
   scenario.resources.demoBuckets[info.name] = &DemoBucket{
    name:       bucketName,
    objectKeys: []string{},
   }
   log.Printf("Created bucket %s.\n", bucketName)
  }

  if len(scenario.resources.demoBuckets) < len(createInfo) {
   scenario.resources.deleteBuckets(ctx)
  } else {
   success = true
  }
 }

 log.Println("S3 buckets created.")
 log.Println(strings.Repeat("-", 88))
}

// EnableLockOnBucket enables object locking on an existing bucket.
func (scenario *ObjectLockScenario) EnableLockOnBucket(ctx context.Context) {
 log.Println("\nA bucket can be configured to use object locking.")
 scenario.questioner.Ask("Press Enter to continue.")

 var err error
 bucket := scenario.resources.demoBuckets["retention-bucket"]
 err = scenario.s3Actions.EnableObjectLockOnBucket(ctx, bucket.name)
 if err != nil {
  switch err.(type) {
  case *types.NoSuchBucket:
   log.Printf("Couldn't enable object locking on bucket %s.\n", bucket.name)
  default:
   panic(err)
  }
 } else {
  log.Printf("Object locking enabled on bucket %s.", bucket.name)
 }
```

```
 log.Println(strings.Repeat("-", 88))
}

// SetDefaultRetentionPolicy sets a default retention governance policy on a bucket.
func (scenario *ObjectLockScenario) SetDefaultRetentionPolicy(ctx context.Context) {
 log.Println("\nA bucket can be configured to use object locking with a default
 retention period.")

 bucket := scenario.resources.demoBuckets["retention-bucket"]
 retentionPeriod := scenario.questioner.AskInt("Enter the default retention period
 in days: ")
 err := scenario.s3Actions.ModifyDefaultBucketRetention(ctx,
 bucket.name, types.ObjectLockEnabledEnabled, int32(retentionPeriod),
 types.ObjectLockRetentionModeGovernance)
 if err != nil {
  switch err.(type) {
  case *types.NoSuchBucket:
   log.Printf("Couldn't configure a default retention period on bucket %s.\n",
 bucket.name)
  default:
   panic(err)
  }
 } else {
  log.Printf("Default retention policy set on bucket %s with %d day retention
 period.", bucket.name, retentionPeriod)
  bucket.retentionEnabled = true
 }

 log.Println(strings.Repeat("-", 88))
}

// UploadTestObjects uploads test objects to the S3 buckets.
func (scenario *ObjectLockScenario) UploadTestObjects(ctx context.Context) {
 log.Println("Uploading test objects to S3 buckets.")

 for _, info := range createInfo {
  bucket := scenario.resources.demoBuckets[info.name]
  for i := 0; i < 2; i++ {
   key, err := scenario.s3Actions.UploadObject(ctx, bucket.name,
 fmt.Sprintf("example-%d", i),
    fmt.Sprintf("Example object content #%d in bucket %s.", i, bucket.name))
   if err != nil {
    switch err.(type) {
```

```
    case *types.NoSuchBucket:
     log.Printf("Couldn't upload %s to bucket %s.\n", key, bucket.name)
    default:
     panic(err)
    }
   } else {
    log.Printf("Uploaded %s to bucket %s.\n", key, bucket.name)
    bucket.objectKeys = append(bucket.objectKeys, key)
   }
  }
 }

 scenario.questioner.Ask("Test objects uploaded. Press Enter to continue.")
 log.Println(strings.Repeat("-", 88))
}

// SetObjectLockConfigurations sets object lock configurations on the test objects.
func (scenario *ObjectLockScenario) SetObjectLockConfigurations(ctx context.Context)
 {
 log.Println("Now let's set object lock configurations on individual objects.")

 buckets := []*DemoBucket{scenario.resources.demoBuckets["lock-bucket"],
 scenario.resources.demoBuckets["retention-bucket"]}
 for _, bucket := range buckets {
  for index, objKey := range bucket.objectKeys {
   switch index {
   case 0:
    if scenario.questioner.AskBool(fmt.Sprintf("\nDo you want to add a legal hold to
 %s in %s (y/n)? ", objKey, bucket.name), "y") {
     err := scenario.s3Actions.PutObjectLegalHold(ctx, bucket.name, objKey, "",
 types.ObjectLockLegalHoldStatusOn)
     if err != nil {
      switch err.(type) {
      case *types.NoSuchKey:
       log.Printf("Couldn't set legal hold on %s.\n", objKey)
      default:
       panic(err)
      }
     } else {
      log.Printf("Legal hold set on %s.\n", objKey)
     }
    }
   case 1:
```

```
    q := fmt.Sprintf("\nDo you want to add a 1 day Governance retention period to %s
 in %s?\n"+
     "Reminder: Only a user with the s3:BypassGovernanceRetention permission is able
 to delete this object\n"+
     "or its bucket until the retention period has expired. (y/n) ", objKey,
 bucket.name)
    if scenario.questioner.AskBool(q, "y") {
     err := scenario.s3Actions.PutObjectRetention(ctx, bucket.name, objKey,
 types.ObjectLockRetentionModeGovernance, 1)
     if err != nil {
      switch err.(type) {
      case *types.NoSuchKey:
       log.Printf("Couldn't set retention period on %s in %s.\n", objKey,
 bucket.name)
      default:
       panic(err)
      }
     } else {
      log.Printf("Retention period set to 1 for %s.", objKey)
      bucket.retentionEnabled = true
     }
    }
   }
  }
 }
 log.Println(strings.Repeat("-", 88))
}

const (
 ListAll = iota
 DeleteObject
 DeleteRetentionObject
 OverwriteObject
 ViewRetention
 ViewLegalHold
 Finish
)

// InteractWithObjects allows the user to interact with the objects and test the
 object lock configurations.
func (scenario *ObjectLockScenario) InteractWithObjects(ctx context.Context) {
 log.Println("Now you can interact with the objects to explore the object lock
 configurations.")
 interactiveChoices := []string{
```

```
 "List all objects and buckets.",
 "Attempt to delete an object.",
 "Attempt to delete an object with retention period bypass.",
 "Attempt to overwrite a file.",
 "View the retention settings for an object.",
 "View the legal hold settings for an object.",
 "Finish the workflow."}

choice := ListAll
for choice != Finish {
 objList := scenario.GetAllObjects(ctx)
 objChoices := scenario.makeObjectChoiceList(objList)
 choice = scenario.questioner.AskChoice("Choose an action from the menu:\n",
interactiveChoices)
 switch choice {
 case ListAll:
  log.Println("The current objects in the example buckets are:")
  for _, objChoice := range objChoices {
   log.Println("\t", objChoice)
  }
 case DeleteObject, DeleteRetentionObject:
  objChoice := scenario.questioner.AskChoice("Enter the number of the object to
delete:\n", objChoices)
  obj := objList[objChoice]
  deleted, err := scenario.s3Actions.DeleteObject(ctx, obj.bucket, obj.key,
obj.versionId, choice == DeleteRetentionObject)
  if err != nil {
   switch err.(type) {
   case *types.NoSuchKey:
    log.Println("Nothing to delete.")
   default:
    panic(err)
   }
  } else if deleted {
   log.Printf("Object %s deleted.\n", obj.key)
  }
 case OverwriteObject:
  objChoice := scenario.questioner.AskChoice("Enter the number of the object to
overwrite:\n", objChoices)
  obj := objList[objChoice]
  _, err := scenario.s3Actions.UploadObject(ctx, obj.bucket, obj.key,
fmt.Sprintf("New content in object %s.", obj.key))
  if err != nil {
   switch err.(type) {
```

```
    case *types.NoSuchBucket:
     log.Println("Couldn't upload to nonexistent bucket.")
    default:
     panic(err)
    }
   } else {
    log.Printf("Uploaded new content to object %s.\n", obj.key)
   }
  case ViewRetention:
   objChoice := scenario.questioner.AskChoice("Enter the number of the object to
view:\n", objChoices)
   obj := objList[objChoice]
   retention, err := scenario.s3Actions.GetObjectRetention(ctx, obj.bucket, obj.key)
   if err != nil {
    switch err.(type) {
    case *types.NoSuchKey:
     log.Printf("Can't get retention configuration for %s.\n", obj.key)
    default:
     panic(err)
    }
   } else if retention != nil {
    log.Printf("Object %s has retention mode %s until %v.\n", obj.key,
retention.Mode, retention.RetainUntilDate)
   } else {
    log.Printf("Object %s does not have object retention configured.\n", obj.key)
   }
  case ViewLegalHold:
   objChoice := scenario.questioner.AskChoice("Enter the number of the object to
view:\n", objChoices)
   obj := objList[objChoice]
   legalHold, err := scenario.s3Actions.GetObjectLegalHold(ctx, obj.bucket, obj.key,
obj.versionId)
   if err != nil {
    switch err.(type) {
    case *types.NoSuchKey:
     log.Printf("Can't get legal hold configuration for %s.\n", obj.key)
    default:
     panic(err)
    }
   } else if legalHold != nil {
    log.Printf("Object %s has legal hold %v.", obj.key, *legalHold)
   } else {
    log.Printf("Object %s does not have legal hold configured.", obj.key)
   }
```

```
  case Finish:
   log.Println("Let's clean up.")
  }
  log.Println(strings.Repeat("-", 88))
 }
}

type BucketKeyVersionId struct {
 bucket    string
 key       string
 versionId string
}

// GetAllObjects gets the object versions in the example S3 buckets and returns them
 in a flattened list.
func (scenario *ObjectLockScenario) GetAllObjects(ctx context.Context)
 []BucketKeyVersionId {
 var objectList []BucketKeyVersionId
 for _, info := range createInfo {
  bucket := scenario.resources.demoBuckets[info.name]
  versions, err := scenario.s3Actions.ListObjectVersions(ctx, bucket.name)
  if err != nil {
   switch err.(type) {
   case *types.NoSuchBucket:
    log.Printf("Couldn't get object versions for %s.\n", bucket.name)
   default:
    panic(err)
   }
  } else {
   for _, version := range versions {
    objectList = append(objectList,
     BucketKeyVersionId{bucket: bucket.name, key: *version.Key, versionId:
 *version.VersionId})
   }
  }
 }
 return objectList
}

// makeObjectChoiceList makes the object version list into a list of strings that
 are displayed
// as choices.
func (scenario *ObjectLockScenario) makeObjectChoiceList(bucketObjects
 []BucketKeyVersionId) []string {
```

```
 choices := make([]string, len(bucketObjects))
 for i := 0; i < len(bucketObjects); i++ {
  choices[i] = fmt.Sprintf("%s in %s with VersionId %s.",
   bucketObjects[i].key, bucketObjects[i].bucket, bucketObjects[i].versionId)
 }
 return choices
}

// Run runs the S3 Object Lock scenario.
func (scenario *ObjectLockScenario) Run(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   _, isMock := scenario.questioner.(*demotools.MockQuestioner)
   if isMock || scenario.questioner.AskBool("Do you want to see the full error
 message (y/n)?", "y") {
    log.Println(r)
   }
   scenario.resources.Cleanup(ctx)
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon S3 Object Lock Feature Scenario.")
 log.Println(strings.Repeat("-", 88))

 scenario.CreateBuckets(ctx)
 scenario.EnableLockOnBucket(ctx)
 scenario.SetDefaultRetentionPolicy(ctx)
 scenario.UploadTestObjects(ctx)
 scenario.SetObjectLockConfigurations(ctx)
 scenario.InteractWithObjects(ctx)

 scenario.resources.Cleanup(ctx)

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

この例で使用されている S3 アクションをラップする構造体を定義します。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "log"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// S3Actions wraps S3 service actions.
type S3Actions struct {
 S3Client  *s3.Client
 S3Manager *manager.Uploader
}



// CreateBucketWithLock creates a new S3 bucket with optional object locking enabled
// and waits for the bucket to exist before returning.
func (actor S3Actions) CreateBucketWithLock(ctx context.Context, bucket string,
 region string, enableObjectLock bool) (string, error) {
 input := &s3.CreateBucketInput{
  Bucket: aws.String(bucket),
  CreateBucketConfiguration: &types.CreateBucketConfiguration{
   LocationConstraint: types.BucketLocationConstraint(region),
  },
 }

 if enableObjectLock {
  input.ObjectLockEnabledForBucket = aws.Bool(true)
 }

 _, err := actor.S3Client.CreateBucket(ctx, input)
 if err != nil {
  var owned *types.BucketAlreadyOwnedByYou
  var exists *types.BucketAlreadyExists
```

```
  if errors.As(err, &owned) {
   log.Printf("You already own bucket %s.\n", bucket)
   err = owned
  } else if errors.As(err, &exists) {
   log.Printf("Bucket %s already exists.\n", bucket)
   err = exists
  }
 } else {
  err = s3.NewBucketExistsWaiter(actor.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(bucket)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to exist.\n", bucket)
  }
 }

 return bucket, err
}



// GetObjectLegalHold retrieves the legal hold status for an S3 object.
func (actor S3Actions) GetObjectLegalHold(ctx context.Context, bucket string, key
 string, versionId string) (*types.ObjectLockLegalHoldStatus, error) {
 var status *types.ObjectLockLegalHoldStatus
 input := &s3.GetObjectLegalHoldInput{
  Bucket:    aws.String(bucket),
  Key:       aws.String(key),
  VersionId: aws.String(versionId),
 }

 output, err := actor.S3Client.GetObjectLegalHold(ctx, input)
 if err != nil {
  var noSuchKeyErr *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noSuchKeyErr) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noSuchKeyErr
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "NoSuchObjectLockConfiguration":
    log.Printf("Object %s does not have an object lock configuration.\n", key)
    err = nil
   case "InvalidRequest":
    log.Printf("Bucket %s does not have an object lock configuration.\n", bucket)
```

```
    err = nil
   }
  }
 } else {
  status = &output.LegalHold.Status
 }

 return status, err
}



// GetObjectLockConfiguration retrieves the object lock configuration for an S3
 bucket.
func (actor S3Actions) GetObjectLockConfiguration(ctx context.Context, bucket
 string) (*types.ObjectLockConfiguration, error) {
 var lockConfig *types.ObjectLockConfiguration
 input := &s3.GetObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
 }

 output, err := actor.S3Client.GetObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  } else if errors.As(err, &apiErr) && apiErr.ErrorCode() ==
 "ObjectLockConfigurationNotFoundError" {
   log.Printf("Bucket %s does not have an object lock configuration.\n", bucket)
   err = nil
  }
 } else {
  lockConfig = output.ObjectLockConfiguration
 }

 return lockConfig, err
}



// GetObjectRetention retrieves the object retention configuration for an S3 object.
```

```
func (actor S3Actions) GetObjectRetention(ctx context.Context, bucket string, key
 string) (*types.ObjectLockRetention, error) {
 var retention *types.ObjectLockRetention
 input := &s3.GetObjectRetentionInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
 }

 output, err := actor.S3Client.GetObjectRetention(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "NoSuchObjectLockConfiguration":
    err = nil
   case "InvalidRequest":
    log.Printf("Bucket %s does not have locking enabled.", bucket)
    err = nil
   }
  }
 } else {
  retention = output.Retention
 }

 return retention, err
}



// PutObjectLegalHold sets the legal hold configuration for an S3 object.
func (actor S3Actions) PutObjectLegalHold(ctx context.Context, bucket string, key
 string, versionId string, legalHoldStatus types.ObjectLockLegalHoldStatus) error {
 input := &s3.PutObjectLegalHoldInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
  LegalHold: &types.ObjectLockLegalHold{
   Status: legalHoldStatus,
  },
 }
 if versionId != "" {
```

```
  input.VersionId = aws.String(versionId)
 }

 _, err := actor.S3Client.PutObjectLegalHold(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  }
 }

 return err
}



// ModifyDefaultBucketRetention modifies the default retention period of an existing
 bucket.
func (actor S3Actions) ModifyDefaultBucketRetention(
 ctx context.Context, bucket string, lockMode types.ObjectLockEnabled,
 retentionPeriod int32, retentionMode types.ObjectLockRetentionMode) error {

 input := &s3.PutObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
  ObjectLockConfiguration: &types.ObjectLockConfiguration{
   ObjectLockEnabled: lockMode,
   Rule: &types.ObjectLockRule{
    DefaultRetention: &types.DefaultRetention{
     Days: aws.Int32(retentionPeriod),
     Mode: retentionMode,
    },
   },
  },
 }
 _, err := actor.S3Client.PutObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 }
```

```
 return err
}



// EnableObjectLockOnBucket enables object locking on an existing bucket.
func (actor S3Actions) EnableObjectLockOnBucket(ctx context.Context, bucket string)
 error {
 // Versioning must be enabled on the bucket before object locking is enabled.
 verInput := &s3.PutBucketVersioningInput{
  Bucket: aws.String(bucket),
  VersioningConfiguration: &types.VersioningConfiguration{
   MFADelete: types.MFADeleteDisabled,
   Status:    types.BucketVersioningStatusEnabled,
  },
 }
 _, err := actor.S3Client.PutBucketVersioning(ctx, verInput)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
  return err
 }

 input := &s3.PutObjectLockConfigurationInput{
  Bucket: aws.String(bucket),
  ObjectLockConfiguration: &types.ObjectLockConfiguration{
   ObjectLockEnabled: types.ObjectLockEnabledEnabled,
  },
 }
 _, err = actor.S3Client.PutObjectLockConfiguration(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 }

 return err
}
```

```
// PutObjectRetention sets the object retention configuration for an S3 object.
func (actor S3Actions) PutObjectRetention(ctx context.Context, bucket string, key
 string, retentionMode types.ObjectLockRetentionMode, retentionPeriodDays int32)
 error {
 input := &s3.PutObjectRetentionInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
  Retention: &types.ObjectLockRetention{
   Mode:            retentionMode,
   RetainUntilDate: aws.Time(time.Now().AddDate(0, 0, int(retentionPeriodDays))),
  },
  BypassGovernanceRetention: aws.Bool(true),
 }

 _, err := actor.S3Client.PutObjectRetention(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in bucket %s.\n", key, bucket)
   err = noKey
  }
 }

 return err
}



// UploadObject uses the S3 upload manager to upload an object to a bucket.
func (actor S3Actions) UploadObject(ctx context.Context, bucket string, key string,
 contents string) (string, error) {
 var outKey string
 input := &s3.PutObjectInput{
  Bucket:            aws.String(bucket),
  Key:               aws.String(key),
  Body:              bytes.NewReader([]byte(contents)),
  ChecksumAlgorithm: types.ChecksumAlgorithmSha256,
 }
 output, err := actor.S3Manager.Upload(ctx, input)
 if err != nil {
  var noBucket *types.NoSuchBucket
  if errors.As(err, &noBucket) {
```

```
   log.Printf("Bucket %s does not exist.\n", bucket)
   err = noBucket
  }
 } else {
  err := s3.NewObjectExistsWaiter(actor.S3Client).Wait(ctx, &s3.HeadObjectInput{
   Bucket: aws.String(bucket),
   Key:    aws.String(key),
  }, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist in %s.\n", key, bucket)
  } else {
   outKey = *output.Key
  }
 }
 return outKey, err
}



// ListObjectVersions lists all versions of all objects in a bucket.
func (actor S3Actions) ListObjectVersions(ctx context.Context, bucket string)
 ([]types.ObjectVersion, error) {
 var err error
 var output *s3.ListObjectVersionsOutput
 var versions []types.ObjectVersion
 input := &s3.ListObjectVersionsInput{Bucket: aws.String(bucket)}
 versionPaginator := s3.NewListObjectVersionsPaginator(actor.S3Client, input)
 for versionPaginator.HasMorePages() {
  output, err = versionPaginator.NextPage(ctx)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucket)
    err = noBucket
   }
   break
  } else {
   versions = append(versions, output.Versions...)
  }
 }
 return versions, err
}
```

```
// DeleteObject deletes an object from a bucket.
func (actor S3Actions) DeleteObject(ctx context.Context, bucket string, key string,
 versionId string, bypassGovernance bool) (bool, error) {
 deleted := false
 input := &s3.DeleteObjectInput{
  Bucket: aws.String(bucket),
  Key:    aws.String(key),
 }
 if versionId != "" {
  input.VersionId = aws.String(versionId)
 }
 if bypassGovernance {
  input.BypassGovernanceRetention = aws.Bool(true)
 }
 _, err := actor.S3Client.DeleteObject(ctx, input)
 if err != nil {
  var noKey *types.NoSuchKey
  var apiErr *smithy.GenericAPIError
  if errors.As(err, &noKey) {
   log.Printf("Object %s does not exist in %s.\n", key, bucket)
   err = noKey
  } else if errors.As(err, &apiErr) {
   switch apiErr.ErrorCode() {
   case "AccessDenied":
    log.Printf("Access denied: cannot delete object %s from %s.\n", key, bucket)
    err = nil
   case "InvalidArgument":
    if bypassGovernance {
     log.Printf("You cannot specify bypass governance on a bucket without lock
enabled.")
     err = nil
    }
   }
  }
 } else {
  err = s3.NewObjectNotExistsWaiter(actor.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(bucket), Key: aws.String(key)},
time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s in bucket %s to be deleted.\n",
key, bucket)
  } else {
   deleted = true
```

```
  }
 }
 return deleted, err
}



// DeleteObjects deletes a list of objects from a bucket.
func (actor S3Actions) DeleteObjects(ctx context.Context, bucket string, objects
 []types.ObjectIdentifier, bypassGovernance bool) error {
 if len(objects) == 0 {
  return nil
 }

 input := s3.DeleteObjectsInput{
  Bucket: aws.String(bucket),
  Delete: &types.Delete{
   Objects: objects,
   Quiet:   aws.Bool(true),
  },
 }
 if bypassGovernance {
  input.BypassGovernanceRetention = aws.Bool(true)
 }
 delOut, err := actor.S3Client.DeleteObjects(ctx, &input)
 if err != nil || len(delOut.Errors) > 0 {
  log.Printf("Error deleting objects from bucket %s.\n", bucket)
  if err != nil {
   var noBucket *types.NoSuchBucket
   if errors.As(err, &noBucket) {
    log.Printf("Bucket %s does not exist.\n", bucket)
    err = noBucket
   }
  } else if len(delOut.Errors) > 0 {
   for _, outErr := range delOut.Errors {
    log.Printf("%s: %s\n", *outErr.Key, *outErr.Message)
   }
   err = fmt.Errorf("%s", *delOut.Errors[0].Message)
  }
 } else {
  for _, delObjs := range delOut.Deleted {
   err = s3.NewObjectNotExistsWaiter(actor.S3Client).Wait(
    ctx, &s3.HeadObjectInput{Bucket: aws.String(bucket), Key: delObjs.Key},
 time.Minute)
```

```
   if err != nil {
    log.Printf("Failed attempt to wait for object %s to be deleted.\n",
 *delObjs.Key)
   } else {
    log.Printf("Deleted %s.\n", *delObjs.Key)
   }
  }
 }
 return err
}
```

リソースをクリーンアップします。

```
import (
 "context"
 "log"
 "s3_object_lock/actions"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

// DemoBucket contains metadata for buckets used in this example.
type DemoBucket struct {
 name             string
 retentionEnabled bool
 objectKeys       []string
}

// Resources keeps track of AWS resources created during the ObjectLockScenario and
 handles
// cleanup when the scenario finishes.
type Resources struct {
 demoBuckets map[string]*DemoBucket

 s3Actions  *actions.S3Actions
```

```
 questioner demotools.IQuestioner
}

// init initializes objects in the Resources struct.
func (resources *Resources) init(s3Actions *actions.S3Actions, questioner
 demotools.IQuestioner) {
 resources.s3Actions = s3Actions
 resources.questioner = questioner
 resources.demoBuckets = map[string]*DemoBucket{}
}

// Cleanup deletes all AWS resources created during the ObjectLockScenario.
func (resources *Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   log.Printf("Something went wrong during cleanup.\n%v\n", r)
   log.Println("Use the AWS Management Console to remove any remaining resources " +
    "that were created for this scenario.")
  }
 }()

 wantDelete := resources.questioner.AskBool("Do you want to remove all of the AWS
 resources that were created "+
  "during this demo (y/n)?", "y")
 if !wantDelete {
  log.Println("Be sure to remove resources when you're done with them to avoid
 unexpected charges!")
  return
 }

 log.Println("Removing objects from S3 buckets and deleting buckets...")
 resources.deleteBuckets(ctx)
 //resources.deleteRetentionObjects(resources.retentionBucket,
 resources.retentionObjects)

 log.Println("Cleanup complete.")
}

// deleteBuckets empties and then deletes all buckets created during the
 ObjectLockScenario.
func (resources *Resources) deleteBuckets(ctx context.Context) {
 for _, info := range createInfo {
  bucket := resources.demoBuckets[info.name]
  resources.deleteObjects(ctx, bucket)
```

```
  _, err := resources.s3Actions.S3Client.DeleteBucket(ctx, &s3.DeleteBucketInput{
   Bucket: aws.String(bucket.name),
  })
  if err != nil {
   panic(err)
  }
 }
 for _, info := range createInfo {
  bucket := resources.demoBuckets[info.name]
  err := s3.NewBucketNotExistsWaiter(resources.s3Actions.S3Client).Wait(
   ctx, &s3.HeadBucketInput{Bucket: aws.String(bucket.name)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for bucket %s to be deleted.\n", bucket.name)
  } else {
   log.Printf("Deleted %s.\n", bucket.name)
  }
 }
 resources.demoBuckets = map[string]*DemoBucket{}
}

// deleteObjects deletes all objects in the specified bucket.
func (resources *Resources) deleteObjects(ctx context.Context, bucket *DemoBucket) {
 lockConfig, err := resources.s3Actions.GetObjectLockConfiguration(ctx, bucket.name)
 if err != nil {
  panic(err)
 }
 versions, err := resources.s3Actions.ListObjectVersions(ctx, bucket.name)
 if err != nil {
  switch err.(type) {
  case *types.NoSuchBucket:
   log.Printf("No objects to get from %s.\n", bucket.name)
  default:
   panic(err)
  }
 }
 delObjects := make([]types.ObjectIdentifier, len(versions))
 for i, version := range versions {
  if lockConfig != nil && lockConfig.ObjectLockEnabled ==
 types.ObjectLockEnabledEnabled {
   status, err := resources.s3Actions.GetObjectLegalHold(ctx, bucket.name,
 *version.Key, *version.VersionId)
   if err != nil {
    switch err.(type) {
    case *types.NoSuchKey:
```

```
     log.Printf("Couldn't determine legal hold status for %s in %s.\n",
 *version.Key, bucket.name)
    default:
     panic(err)
    }
   } else if status != nil && *status == types.ObjectLockLegalHoldStatusOn {
    err = resources.s3Actions.PutObjectLegalHold(ctx, bucket.name, *version.Key,
 *version.VersionId, types.ObjectLockLegalHoldStatusOff)
    if err != nil {
     switch err.(type) {
     case *types.NoSuchKey:
      log.Printf("Couldn't turn off legal hold for %s in %s.\n", *version.Key,
 bucket.name)
     default:
      panic(err)
     }
    }
   }
  }
  delObjects[i] = types.ObjectIdentifier{Key: version.Key, VersionId:
 version.VersionId}
 }
 err = resources.s3Actions.DeleteObjects(ctx, bucket.name, delObjects,
 bucket.retentionEnabled)
 if err != nil {
  switch err.(type) {
  case *types.NoSuchBucket:
   log.Println("Nothing to delete.")
  default:
   panic(err)
  }
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - GetObjectLegalHold
  - GetObjectLockConfiguration
  - GetObjectRetention
  - PutObjectLegalHold

- PutObjectLockConfiguration
- PutObjectRetention

大きなファイルをアップロードまたはダウンロードする

次のコード例は、Amazon S3 との間で大きなファイルをアップロードまたはダウンロードする方法を示しています。

詳細については、「マルチパートアップロードを使用したオブジェクトのアップロード」を参照してください。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

アップロードマネージャーとダウンロードマネージャーを使用してデータを分割し、同時に転送する関数を作成します。

```
import (
 "bytes"
 "context"
 "errors"
 "fmt"
 "io"
 "log"
 "os"
 "time"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/feature/s3/manager"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/aws/aws-sdk-go-v2/service/s3/types"
 "github.com/aws/smithy-go"
)

// BucketBasics encapsulates the Amazon Simple Storage Service (Amazon S3) actions
```

```
// used in the examples.
// It contains S3Client, an Amazon S3 service client that is used to perform bucket
// and object actions.
type BucketBasics struct {
 S3Client *s3.Client
}



// UploadLargeObject uses an upload manager to upload data to an object in a bucket.
// The upload manager breaks large data into parts and uploads the parts
 concurrently.
func (basics BucketBasics) UploadLargeObject(ctx context.Context, bucketName string,
 objectKey string, largeObject []byte) error {
 largeBuffer := bytes.NewReader(largeObject)
 var partMiBs int64 = 10
 uploader := manager.NewUploader(basics.S3Client, func(u *manager.Uploader) {
  u.PartSize = partMiBs * 1024 * 1024
 })
 _, err := uploader.Upload(ctx, &s3.PutObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
  Body:   largeBuffer,
 })
 if err != nil {
  var apiErr smithy.APIError
  if errors.As(err, &apiErr) && apiErr.ErrorCode() == "EntityTooLarge" {
   log.Printf("Error while uploading object to %s. The object is too large.\n"+
    "The maximum size for a multipart upload is 5TB.", bucketName)
  } else {
   log.Printf("Couldn't upload large object to %v:%v. Here's why: %v\n",
    bucketName, objectKey, err)
  }
 } else {
  err = s3.NewObjectExistsWaiter(basics.S3Client).Wait(
   ctx, &s3.HeadObjectInput{Bucket: aws.String(bucketName), Key:
 aws.String(objectKey)}, time.Minute)
  if err != nil {
   log.Printf("Failed attempt to wait for object %s to exist.\n", objectKey)
  }
 }

 return err
}
```

```
// DownloadLargeObject uses a download manager to download an object from a bucket.
// The download manager gets the data in parts and writes them to a buffer until all
 of
// the data has been downloaded.
func (basics BucketBasics) DownloadLargeObject(ctx context.Context, bucketName
 string, objectKey string) ([]byte, error) {
 var partMiBs int64 = 10
 downloader := manager.NewDownloader(basics.S3Client, func(d *manager.Downloader) {
  d.PartSize = partMiBs * 1024 * 1024
 })
 buffer := manager.NewWriteAtBuffer([]byte{})
 _, err := downloader.Download(ctx, buffer, &s3.GetObjectInput{
  Bucket: aws.String(bucketName),
  Key:    aws.String(objectKey),
 })
 if err != nil {
  log.Printf("Couldn't download large object from %v:%v. Here's why: %v\n",
   bucketName, objectKey, err)
 }
 return buffer.Bytes(), err
}
```

アップロードマネージャーとダウンロードマネージャーをコンテキストで使用する方法を示すインタラクティブなシナリオを実行します。

```
import (
 "context"
 "crypto/rand"
 "log"
 "strings"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/s3"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/s3/actions"
)
```

```
// RunLargeObjectScenario is an interactive example that shows you how to use Amazon
// Simple Storage Service (Amazon S3) to upload and download large objects.
//
// 1. Create a bucket.
// 3. Upload a large object to the bucket by using an upload manager.
// 5. Download a large object by using a download manager.
// 8. Delete all objects in the bucket.
// 9. Delete the bucket.
//
// This example creates an Amazon S3 service client from the specified sdkConfig so
 that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
func RunLargeObjectScenario(ctx context.Context, sdkConfig aws.Config, questioner
 demotools.IQuestioner) {
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.")
   _, isMock := questioner.(*demotools.MockQuestioner)
   if isMock || questioner.AskBool("Do you want to see the full error message (y/
n)?", "y") {
    log.Println(r)
   }
  }
 }()

 log.Println(strings.Repeat("-", 88))
 log.Println("Welcome to the Amazon S3 large object demo.")
 log.Println(strings.Repeat("-", 88))

 s3Client := s3.NewFromConfig(sdkConfig)
 bucketBasics := actions.BucketBasics{S3Client: s3Client}

 bucketName := questioner.Ask("Let's create a bucket. Enter a name for your
 bucket:",
  demotools.NotEmpty{})
 bucketExists, err := bucketBasics.BucketExists(ctx, bucketName)
 if err != nil {
  panic(err)
 }
 if !bucketExists {
```

```
 err = bucketBasics.CreateBucket(ctx, bucketName, sdkConfig.Region)
 if err != nil {
  panic(err)
 } else {
  log.Println("Bucket created.")
 }
}
log.Println(strings.Repeat("-", 88))

mibs := 30
log.Printf("Let's create a slice of %v MiB of random bytes and upload it to your
bucket. ", mibs)
questioner.Ask("Press Enter when you're ready.")
largeBytes := make([]byte, 1024*1024*mibs)
_, _ = rand.Read(largeBytes)
largeKey := "doc-example-large"
log.Println("Uploading...")
err = bucketBasics.UploadLargeObject(ctx, bucketName, largeKey, largeBytes)
if err != nil {
 panic(err)
}
log.Printf("Uploaded %v MiB object as %v", mibs, largeKey)
log.Println(strings.Repeat("-", 88))

log.Printf("Let's download the %v MiB object.", mibs)
questioner.Ask("Press Enter when you're ready.")
log.Println("Downloading...")
largeDownload, err := bucketBasics.DownloadLargeObject(ctx, bucketName, largeKey)
if err != nil {
 panic(err)
}
log.Printf("Downloaded %v bytes.", len(largeDownload))
log.Println(strings.Repeat("-", 88))

if questioner.AskBool("Do you want to delete your bucket and all of its "+
 "contents? (y/n)", "y") {
 log.Println("Deleting object.")
 err = bucketBasics.DeleteObjects(ctx, bucketName, []string{largeKey})
 if err != nil {
  panic(err)
 }
 log.Println("Deleting bucket.")
 err = bucketBasics.DeleteBucket(ctx, bucketName)
 if err != nil {
```

```
   panic(err)
  }
 } else {
  log.Println("Okay. Don't forget to delete objects from your bucket to avoid
 charges.")
 }
 log.Println(strings.Repeat("-", 88))

 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

サーバーレスサンプル

Amazon S3 トリガーから Lambda 関数を呼び出す

次のコード例は、S3 バケットにオブジェクトをアップロードすることによってトリガーされるイベントを受け取る Lambda 関数を実装する方法を示しています。この関数は、イベントパラメータから S3 バケット名とオブジェクトキーを取得し、Amazon S3 API を呼び出してオブジェクトのコンテンツタイプを取得してログに記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を検索し、設定および実行の方法を確認してください。

Go を使用して Lambda で S3 イベントの消費。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "log"
```

```
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/s3"
)

func handler(ctx context.Context, s3Event events.S3Event) error {
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  log.Printf("failed to load default config: %s", err)
  return err
 }
 s3Client := s3.NewFromConfig(sdkConfig)

 for _, record := range s3Event.Records {
  bucket := record.S3.Bucket.Name
  key := record.S3.Object.URLDecodedKey
  headOutput, err := s3Client.HeadObject(ctx, &s3.HeadObjectInput{
   Bucket: &bucket,
   Key:    &key,
  })
  if err != nil {
   log.Printf("error getting head of object %s/%s: %s", bucket, key, err)
   return err
  }
  log.Printf("successfully retrieved %s/%s of type %s", bucket, key,
 *headOutput.ContentType)
 }

 return nil
}

func main() {
 lambda.Start(handler)
}
```

SDK for Go V2 を使用した Amazon SNS の例

次のコード例は、Amazon SNS で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

シナリオは、1 つのサービス内から、または他の AWS のサービスと組み合わせて複数の関数を呼び出し、特定のタスクを実行する方法を示すコード例です。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- はじめに
- アクション
- シナリオ
- サーバーレスサンプル

はじめに

Hello Amazon SNS

次のコード例は、Amazon SNS の使用を開始する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/config"
```

```
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Notification Service
// (Amazon SNS) client and list the topics in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 snsClient := sns.NewFromConfig(sdkConfig)
 fmt.Println("Let's list the topics for your account.")
 var topics []types.Topic
 paginator := sns.NewListTopicsPaginator(snsClient, &sns.ListTopicsInput{})
 for paginator.HasMorePages() {
  output, err := paginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get topics. Here's why: %v\n", err)
   break
  } else {
   topics = append(topics, output.Topics...)
  }
 }
 if len(topics) == 0 {
  fmt.Println("You don't have any topics!")
 } else {
  for _, topic := range topics {
   fmt.Printf("\t%v\n", *topic.TopicArn)
  }
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「ListTopics」を参照してください。

アクション

`CreateTopic`

次のコード例は、`CreateTopic` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}



// CreateTopic creates an Amazon SNS topic with the specified name. You can
 optionally
// specify that the topic is created as a FIFO topic and whether it uses content-
based
// deduplication instead of ID-based deduplication.
func (actor SnsActions) CreateTopic(ctx context.Context, topicName string,
 isFifoTopic bool, contentBasedDeduplication bool) (string, error) {
 var topicArn string
```

```
 topicAttributes := map[string]string{}
 if isFifoTopic {
  topicAttributes["FifoTopic"] = "true"
 }
 if contentBasedDeduplication {
  topicAttributes["ContentBasedDeduplication"] = "true"
 }
 topic, err := actor.SnsClient.CreateTopic(ctx, &sns.CreateTopicInput{
  Name:       aws.String(topicName),
  Attributes: topicAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create topic %v. Here's why: %v\n", topicName, err)
 } else {
  topicArn = *topic.TopicArn
 }

 return topicArn, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateTopic」を参照してください。

`DeleteTopic`

次のコード例は、`DeleteTopic` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
```

```
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}



// DeleteTopic delete an Amazon SNS topic.
func (actor SnsActions) DeleteTopic(ctx context.Context, topicArn string) error {
 _, err := actor.SnsClient.DeleteTopic(ctx, &sns.DeleteTopicInput{
  TopicArn: aws.String(topicArn)})
 if err != nil {
  log.Printf("Couldn't delete topic %v. Here's why: %v\n", topicArn, err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteTopic」を参照してください。

`ListTopics`

次のコード例は、`ListTopics` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Notification Service
// (Amazon SNS) client and list the topics in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 snsClient := sns.NewFromConfig(sdkConfig)
 fmt.Println("Let's list the topics for your account.")
 var topics []types.Topic
 paginator := sns.NewListTopicsPaginator(snsClient, &sns.ListTopicsInput{})
 for paginator.HasMorePages() {
  output, err := paginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get topics. Here's why: %v\n", err)
   break
  } else {
   topics = append(topics, output.Topics...)
  }
 }
 if len(topics) == 0 {
  fmt.Println("You don't have any topics!")
 } else {
  for _, topic := range topics {
```

```
    fmt.Printf("\t%v\n", *topic.TopicArn)
   }
  }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListTopics」を参照してください。

Publish

次のコード例は、Publish を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}
```

```
// Publish publishes a message to an Amazon SNS topic. The message is then sent to
 all
// subscribers. When the topic is a FIFO topic, the message must also contain a
 group ID
// and, when ID-based deduplication is used, a deduplication ID. An optional key-
value
// filter attribute can be specified so that the message can be filtered according
 to
// a filter policy.
func (actor SnsActions) Publish(ctx context.Context, topicArn string, message
 string, groupId string, dedupId string, filterKey string, filterValue string) error
 {
 publishInput := sns.PublishInput{TopicArn: aws.String(topicArn), Message:
 aws.String(message)}
 if groupId != "" {
  publishInput.MessageGroupId = aws.String(groupId)
 }
 if dedupId != "" {
  publishInput.MessageDeduplicationId = aws.String(dedupId)
 }
 if filterKey != "" && filterValue != "" {
  publishInput.MessageAttributes = map[string]types.MessageAttributeValue{
   filterKey: {DataType: aws.String("String"), StringValue:
 aws.String(filterValue)},
  }
 }
 _, err := actor.SnsClient.Publish(ctx, &publishInput)
 if err != nil {
  log.Printf("Couldn't publish message to topic %v. Here's why: %v", topicArn, err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「Publish」を参照してください。

Subscribe

次のコード例は、Subscribe を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

オプションのフィルターでトピックにキューをサブスクライブします。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}



// SubscribeQueue subscribes an Amazon Simple Queue Service (Amazon SQS) queue to an
// Amazon SNS topic. When filterMap is not nil, it is used to specify a filter
 policy
// so that messages are only sent to the queue when the message has the specified
 attributes.
func (actor SnsActions) SubscribeQueue(ctx context.Context, topicArn string,
 queueArn string, filterMap map[string][]string) (string, error) {
 var subscriptionArn string
 var attributes map[string]string
 if filterMap != nil {
  filterBytes, err := json.Marshal(filterMap)
  if err != nil {
   log.Printf("Couldn't create filter policy, here's why: %v\n", err)
```

```
   return "", err
  }
  attributes = map[string]string{"FilterPolicy": string(filterBytes)}
 }
 output, err := actor.SnsClient.Subscribe(ctx, &sns.SubscribeInput{
  Protocol:              aws.String("sqs"),
  TopicArn:              aws.String(topicArn),
  Attributes:            attributes,
  Endpoint:              aws.String(queueArn),
  ReturnSubscriptionArn: true,
 })
 if err != nil {
  log.Printf("Couldn't susbscribe queue %v to topic %v. Here's why: %v\n",
   queueArn, topicArn, err)
 } else {
  subscriptionArn = *output.SubscriptionArn
 }

 return subscriptionArn, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「Subscribe」を参照してください。

シナリオ

メッセージをキューに発行する

次のコード例は、以下の操作方法を示しています。

- トピック (FIFO または非 FIFO) を作成します。
- フィルターを適用するオプションを使用して、複数のキューをトピックにサブスクライブします。
- メッセージをトピックに発行します。
- 受信したメッセージのキューをポーリングします。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

コマンドプロンプトからインタラクティブなシナリオを実行します。

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"
 "strings"
 "topics_and_queues/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

const FIFO_SUFFIX = ".fifo"
const TONE_KEY = "tone"

var ToneChoices = []string{"cheerful", "funny", "serious", "sincere"}

// MessageBody is used to deserialize the body of a message from a JSON string.
type MessageBody struct {
 Message string
}

// ScenarioRunner separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type ScenarioRunner struct {
 questioner demotools.IQuestioner
 snsActor   *actions.SnsActions
 sqsActor   *actions.SqsActions
```

```
}

func (runner ScenarioRunner) CreateTopic(ctx context.Context) (string, string, bool,
 bool) {
 log.Println("SNS topics can be configured as FIFO (First-In-First-Out) or standard.
\n" +
  "FIFO topics deliver messages in order and support deduplication and message
 filtering.")
 isFifoTopic := runner.questioner.AskBool("\nWould you like to work with FIFO
 topics? (y/n) ", "y")

 contentBasedDeduplication := false
 if isFifoTopic {
  log.Println(strings.Repeat("-", 88))
  log.Println("Because you have chosen a FIFO topic, deduplication is supported.\n"
 +
   "Deduplication IDs are either set in the message or are automatically generated
\n" +
   "from content using a hash function. If a message is successfully published to\n"
 +
   "an SNS FIFO topic, any message published and determined to have the same\n" +
   "deduplication ID, within the five-minute deduplication interval, is accepted\n"
 +
   "but not delivered. For more information about deduplication, see:\n" +
   "\thttps://docs.aws.amazon.com/sns/latest/dg/fifo-message-dedup.html.")
  contentBasedDeduplication = runner.questioner.AskBool(
   "\nDo you want to use content-based deduplication instead of entering a
 deduplication ID? (y/n) ", "y")
 }
 log.Println(strings.Repeat("-", 88))

 topicName := runner.questioner.Ask("Enter a name for your SNS topic. ")
 if isFifoTopic {
  topicName = fmt.Sprintf("%v%v", topicName, FIFO_SUFFIX)
  log.Printf("Because you have selected a FIFO topic, '%v' must be appended to\n"+
   "the topic name.", FIFO_SUFFIX)
 }

 topicArn, err := runner.snsActor.CreateTopic(ctx, topicName, isFifoTopic,
 contentBasedDeduplication)
 if err != nil {
  panic(err)
 }
 log.Printf("Your new topic with the name '%v' and Amazon Resource Name (ARN) \n"+
```

```
  "'%v' has been created.", topicName, topicArn)

 return topicName, topicArn, isFifoTopic, contentBasedDeduplication
}

func (runner ScenarioRunner) CreateQueue(ctx context.Context, ordinal string,
 isFifoTopic bool) (string, string) {
 queueName := runner.questioner.Ask(fmt.Sprintf("Enter a name for the %v SQS queue.
 ", ordinal))
 if isFifoTopic {
  queueName = fmt.Sprintf("%v%v", queueName, FIFO_SUFFIX)
  if ordinal == "first" {
   log.Printf("Because you are creating a FIFO SQS queue, '%v' must "+
    "be appended to the queue name.\n", FIFO_SUFFIX)
  }
 }
 queueUrl, err := runner.sqsActor.CreateQueue(ctx, queueName, isFifoTopic)
 if err != nil {
  panic(err)
 }
 log.Printf("Your new SQS queue with the name '%v' and the queue URL "+
  "'%v' has been created.", queueName, queueUrl)

 return queueName, queueUrl
}

func (runner ScenarioRunner) SubscribeQueueToTopic(
 ctx context.Context, queueName string, queueUrl string, topicName string, topicArn
 string, ordinal string,
 isFifoTopic bool) (string, bool) {

 queueArn, err := runner.sqsActor.GetQueueArn(ctx, queueUrl)
 if err != nil {
  panic(err)
 }
 log.Printf("The ARN of your queue is: %v.\n", queueArn)

 err = runner.sqsActor.AttachSendMessagePolicy(ctx, queueUrl, queueArn, topicArn)
 if err != nil {
  panic(err)
 }
 log.Println("Attached an IAM policy to the queue so the SNS topic can send " +
  "messages to it.")
 log.Println(strings.Repeat("-", 88))
```

```
var filterPolicy map[string][]string
if isFifoTopic {
 if ordinal == "first" {
  log.Println("Subscriptions to a FIFO topic can have filters.\n" +
   "If you add a filter to this subscription, then only the filtered messages\n" +
   "will be received in the queue.\n" +
   "For information about message filtering, see\n" +
   "\thttps://docs.aws.amazon.com/sns/latest/dg/sns-message-filtering.html\n" +
   "For this example, you can filter messages by a \"tone\" attribute.")
 }

 wantFiltering := runner.questioner.AskBool(
  fmt.Sprintf("Do you want to filter messages that are sent to \"%v\"\n"+
   "from the %v topic? (y/n) ", queueName, topicName), "y")
 if wantFiltering {
  log.Println("You can filter messages by one or more of the following \"tone\"
attributes.")

  var toneSelections []string
  askAboutTones := true
  for askAboutTones {
   toneIndex := runner.questioner.AskChoice(
    "Enter the number of the tone you want to filter by:\n", ToneChoices)
   toneSelections = append(toneSelections, ToneChoices[toneIndex])
   askAboutTones = runner.questioner.AskBool("Do you want to add another tone to
the filter? (y/n) ", "y")
  }
  log.Printf("Your subscription will be filtered to only pass the following tones:
%v\n", toneSelections)
  filterPolicy = map[string][]string{TONE_KEY: toneSelections}
 }
}

subscriptionArn, err := runner.snsActor.SubscribeQueue(ctx, topicArn, queueArn,
filterPolicy)
if err != nil {
 panic(err)
}
log.Printf("The queue %v is now subscribed to the topic %v with the subscription
ARN %v.\n",
 queueName, topicName, subscriptionArn)

return subscriptionArn, filterPolicy != nil
```

```
}

func (runner ScenarioRunner) PublishMessages(ctx context.Context, topicArn string,
 isFifoTopic bool, contentBasedDeduplication bool, usingFilters bool) {
 var message string
 var groupId string
 var dedupId string
 var toneSelection string
 publishMore := true
 for publishMore {
  groupId = ""
  dedupId = ""
  toneSelection = ""
  message = runner.questioner.Ask("Enter a message to publish: ")
  if isFifoTopic {
   log.Println("Because you are using a FIFO topic, you must set a message group ID.
\n" +
    "All messages within the same group will be received in the order they were
 published.")
   groupId = runner.questioner.Ask("Enter a message group ID: ")
   if !contentBasedDeduplication {
    log.Println("Because you are not using content-based deduplication,\n" +
     "you must enter a deduplication ID.")
    dedupId = runner.questioner.Ask("Enter a deduplication ID: ")
   }
  }
  if usingFilters {
   if runner.questioner.AskBool("Add a tone attribute so this message can be
 filtered? (y/n) ", "y") {
    toneIndex := runner.questioner.AskChoice(
     "Enter the number of the tone you want to filter by:\n", ToneChoices)
    toneSelection = ToneChoices[toneIndex]
   }
  }

  err := runner.snsActor.Publish(ctx, topicArn, message, groupId, dedupId, TONE_KEY,
 toneSelection)
  if err != nil {
   panic(err)
  }
  log.Println(("Your message was published."))

  publishMore = runner.questioner.AskBool("Do you want to publish another messsage?
 (y/n) ", "y")
```

```
 }
}

func (runner ScenarioRunner) PollForMessages(ctx context.Context, queueUrls
 []string) {
 log.Println("Polling queues for messages...")
 for _, queueUrl := range queueUrls {
  var messages []types.Message
  for {
   currentMsgs, err := runner.sqsActor.GetMessages(ctx, queueUrl, 10, 1)
   if err != nil {
    panic(err)
   }
   if len(currentMsgs) == 0 {
    break
   }
   messages = append(messages, currentMsgs...)
  }
  if len(messages) == 0 {
   log.Printf("No messages were received by queue %v.\n", queueUrl)
  } else if len(messages) == 1 {
   log.Printf("One message was received by queue %v:\n", queueUrl)

  } else {
   log.Printf("%v messages were received by queue %v:\n", len(messages), queueUrl)
  }
  for msgIndex, message := range messages {
   messageBody := MessageBody{}
   err := json.Unmarshal([]byte(*message.Body), &messageBody)
   if err != nil {
    panic(err)
   }
   log.Printf("Message %v: %v\n", msgIndex+1, messageBody.Message)
  }

  if len(messages) > 0 {
   log.Printf("Deleting %v messages from queue %v.\n", len(messages), queueUrl)
   err := runner.sqsActor.DeleteMessages(ctx, queueUrl, messages)
   if err != nil {
    panic(err)
   }
  }
 }
}
```

```
// RunTopicsAndQueuesScenario is an interactive example that shows you how to use
 the
// AWS SDK for Go to create and use Amazon SNS topics and Amazon SQS queues.
//
// 1. Create a topic (FIFO or non-FIFO).
// 2. Subscribe several queues to the topic with an option to apply a filter.
// 3. Publish messages to the topic.
// 4. Poll the queues for messages received.
// 5. Delete the topic and the queues.
//
// This example creates service clients from the specified sdkConfig so that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
func RunTopicsAndQueuesScenario(
 ctx context.Context, sdkConfig aws.Config, questioner demotools.IQuestioner) {
 resources := Resources{}
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.\n" +
    "Cleaning up any resources that were created...")
   resources.Cleanup(ctx)
  }
 }()
 queueCount := 2

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome to messaging with topics and queues.\n\n"+
  "In this scenario, you will create an SNS topic and subscribe %v SQS queues to the
\n"+
  "topic. You can select from several options for configuring the topic and the\n"+
  "subscriptions for the queues. You can then post to the topic and see the results
\n"+
  "in the queues.\n", queueCount)

 log.Println(strings.Repeat("-", 88))

 runner := ScenarioRunner{
  questioner: questioner,
  snsActor:   &actions.SnsActions{SnsClient: sns.NewFromConfig(sdkConfig)},
  sqsActor:   &actions.SqsActions{SqsClient: sqs.NewFromConfig(sdkConfig)},
```

```
 }
 resources.snsActor = runner.snsActor
 resources.sqsActor = runner.sqsActor

 topicName, topicArn, isFifoTopic, contentBasedDeduplication :=
 runner.CreateTopic(ctx)
 resources.topicArn = topicArn
 log.Println(strings.Repeat("-", 88))

 log.Printf("Now you will create %v SQS queues and subscribe them to the topic.\n",
 queueCount)
 ordinals := []string{"first", "next"}
 usingFilters := false
 for _, ordinal := range ordinals {
  queueName, queueUrl := runner.CreateQueue(ctx, ordinal, isFifoTopic)
  resources.queueUrls = append(resources.queueUrls, queueUrl)

  _, filtering := runner.SubscribeQueueToTopic(ctx, queueName, queueUrl, topicName,
 topicArn, ordinal, isFifoTopic)
  usingFilters = usingFilters || filtering
 }

 log.Println(strings.Repeat("-", 88))
 runner.PublishMessages(ctx, topicArn, isFifoTopic, contentBasedDeduplication,
 usingFilters)
 log.Println(strings.Repeat("-", 88))
 runner.PollForMessages(ctx, resources.queueUrls)

 log.Println(strings.Repeat("-", 88))

 wantCleanup := questioner.AskBool("Do you want to remove all AWS resources created
 for this scenario? (y/n) ", "y")
 if wantCleanup {
  log.Println("Cleaning up resources...")
  resources.Cleanup(ctx)
 }

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

この例で使用されている Amazon SNS アクションをラップする構造体を定義します。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}



// CreateTopic creates an Amazon SNS topic with the specified name. You can
 optionally
// specify that the topic is created as a FIFO topic and whether it uses content-
based
// deduplication instead of ID-based deduplication.
func (actor SnsActions) CreateTopic(ctx context.Context, topicName string,
 isFifoTopic bool, contentBasedDeduplication bool) (string, error) {
 var topicArn string
 topicAttributes := map[string]string{}
 if isFifoTopic {
  topicAttributes["FifoTopic"] = "true"
 }
 if contentBasedDeduplication {
  topicAttributes["ContentBasedDeduplication"] = "true"
 }
 topic, err := actor.SnsClient.CreateTopic(ctx, &sns.CreateTopicInput{
  Name:       aws.String(topicName),
  Attributes: topicAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create topic %v. Here's why: %v\n", topicName, err)
 } else {
```

```
  topicArn = *topic.TopicArn
 }

 return topicArn, err
}



// DeleteTopic delete an Amazon SNS topic.
func (actor SnsActions) DeleteTopic(ctx context.Context, topicArn string) error {
 _, err := actor.SnsClient.DeleteTopic(ctx, &sns.DeleteTopicInput{
  TopicArn: aws.String(topicArn)})
 if err != nil {
  log.Printf("Couldn't delete topic %v. Here's why: %v\n", topicArn, err)
 }
 return err
}



// SubscribeQueue subscribes an Amazon Simple Queue Service (Amazon SQS) queue to an
// Amazon SNS topic. When filterMap is not nil, it is used to specify a filter
 policy
// so that messages are only sent to the queue when the message has the specified
 attributes.
func (actor SnsActions) SubscribeQueue(ctx context.Context, topicArn string,
 queueArn string, filterMap map[string][]string) (string, error) {
 var subscriptionArn string
 var attributes map[string]string
 if filterMap != nil {
  filterBytes, err := json.Marshal(filterMap)
  if err != nil {
   log.Printf("Couldn't create filter policy, here's why: %v\n", err)
   return "", err
  }
  attributes = map[string]string{"FilterPolicy": string(filterBytes)}
 }
 output, err := actor.SnsClient.Subscribe(ctx, &sns.SubscribeInput{
  Protocol:              aws.String("sqs"),
  TopicArn:              aws.String(topicArn),
  Attributes:            attributes,
  Endpoint:              aws.String(queueArn),
  ReturnSubscriptionArn: true,
 })
```

```
 if err != nil {
  log.Printf("Couldn't susbscribe queue %v to topic %v. Here's why: %v\n",
   queueArn, topicArn, err)
 } else {
  subscriptionArn = *output.SubscriptionArn
 }

 return subscriptionArn, err
}



// Publish publishes a message to an Amazon SNS topic. The message is then sent to
 all
// subscribers. When the topic is a FIFO topic, the message must also contain a
 group ID
// and, when ID-based deduplication is used, a deduplication ID. An optional key-
value
// filter attribute can be specified so that the message can be filtered according
 to
// a filter policy.
func (actor SnsActions) Publish(ctx context.Context, topicArn string, message
 string, groupId string, dedupId string, filterKey string, filterValue string) error
 {
 publishInput := sns.PublishInput{TopicArn: aws.String(topicArn), Message:
 aws.String(message)}
 if groupId != "" {
  publishInput.MessageGroupId = aws.String(groupId)
 }
 if dedupId != "" {
  publishInput.MessageDeduplicationId = aws.String(dedupId)
 }
 if filterKey != "" && filterValue != "" {
  publishInput.MessageAttributes = map[string]types.MessageAttributeValue{
   filterKey: {DataType: aws.String("String"), StringValue:
 aws.String(filterValue)},
  }
 }
 _, err := actor.SnsClient.Publish(ctx, &publishInput)
 if err != nil {
  log.Printf("Couldn't publish message to topic %v. Here's why: %v", topicArn, err)
 }
 return err
}
```

この例で使用されている Amazon SQS アクションをラップする構造体を定義します。

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// CreateQueue creates an Amazon SQS queue with the specified name. You can specify
// whether the queue is created as a FIFO queue.
func (actor SqsActions) CreateQueue(ctx context.Context, queueName string,
 isFifoQueue bool) (string, error) {
 var queueUrl string
 queueAttributes := map[string]string{}
 if isFifoQueue {
  queueAttributes["FifoQueue"] = "true"
 }
 queue, err := actor.SqsClient.CreateQueue(ctx, &sqs.CreateQueueInput{
  QueueName:  aws.String(queueName),
  Attributes: queueAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create queue %v. Here's why: %v\n", queueName, err)
 } else {
  queueUrl = *queue.QueueUrl
 }
```

```
 return queueUrl, err
}



// GetQueueArn uses the GetQueueAttributes action to get the Amazon Resource Name
 (ARN)
// of an Amazon SQS queue.
func (actor SqsActions) GetQueueArn(ctx context.Context, queueUrl string) (string,
 error) {
 var queueArn string
 arnAttributeName := types.QueueAttributeNameQueueArn
 attribute, err := actor.SqsClient.GetQueueAttributes(ctx,
 &sqs.GetQueueAttributesInput{
  QueueUrl:       aws.String(queueUrl),
  AttributeNames: []types.QueueAttributeName{arnAttributeName},
 })
 if err != nil {
  log.Printf("Couldn't get ARN for queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  queueArn = attribute.Attributes[string(arnAttributeName)]
 }
 return queueArn, err
}



// AttachSendMessagePolicy uses the SetQueueAttributes action to attach a policy to
 an
// Amazon SQS queue that allows the specified Amazon SNS topic to send messages to
 the
// queue.
func (actor SqsActions) AttachSendMessagePolicy(ctx context.Context, queueUrl
 string, queueArn string, topicArn string) error {
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:    "Allow",
   Action:    "sqs:SendMessage",
   Principal: map[string]string{"Service": "sns.amazonaws.com"},
   Resource:  aws.String(queueArn),
   Condition: PolicyCondition{"ArnEquals": map[string]string{"aws:SourceArn":
 topicArn}},
```

```
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document. Here's why: %v\n", err)
  return err
 }
 _, err = actor.SqsClient.SetQueueAttributes(ctx, &sqs.SetQueueAttributesInput{
  Attributes: map[string]string{
   string(types.QueueAttributeNamePolicy): string(policyBytes),
  },
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't set send message policy on queue %v. Here's why: %v\n",
 queueUrl, err)
 }
 return err
}

// PolicyDocument defines a policy document as a Go struct that can be serialized
// to JSON.
type PolicyDocument struct {
 Version   string
 Statement []PolicyStatement
}

// PolicyStatement defines a statement in a policy document.
type PolicyStatement struct {
 Effect    string
 Action    string
 Principal map[string]string `json:",omitempty"`
 Resource  *string           `json:",omitempty"`
 Condition PolicyCondition   `json:",omitempty"`
}

// PolicyCondition defines a condition in a policy.
type PolicyCondition map[string]map[string]string



// GetMessages uses the ReceiveMessage action to get messages from an Amazon SQS
 queue.
```

```
func (actor SqsActions) GetMessages(ctx context.Context, queueUrl string,
 maxMessages int32, waitTime int32) ([]types.Message, error) {
 var messages []types.Message
 result, err := actor.SqsClient.ReceiveMessage(ctx, &sqs.ReceiveMessageInput{
  QueueUrl:            aws.String(queueUrl),
  MaxNumberOfMessages: maxMessages,
  WaitTimeSeconds:     waitTime,
 })
 if err != nil {
  log.Printf("Couldn't get messages from queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  messages = result.Messages
 }
 return messages, err
}



// DeleteMessages uses the DeleteMessageBatch action to delete a batch of messages
 from
// an Amazon SQS queue.
func (actor SqsActions) DeleteMessages(ctx context.Context, queueUrl string,
 messages []types.Message) error {
 entries := make([]types.DeleteMessageBatchRequestEntry, len(messages))
 for msgIndex := range messages {
  entries[msgIndex].Id = aws.String(fmt.Sprintf("%v", msgIndex))
  entries[msgIndex].ReceiptHandle = messages[msgIndex].ReceiptHandle
 }
 _, err := actor.SqsClient.DeleteMessageBatch(ctx, &sqs.DeleteMessageBatchInput{
  Entries:  entries,
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't delete messages from queue %v. Here's why: %v\n", queueUrl,
 err)
 }
 return err
}



// DeleteQueue deletes an Amazon SQS queue.
func (actor SqsActions) DeleteQueue(ctx context.Context, queueUrl string) error {
 _, err := actor.SqsClient.DeleteQueue(ctx, &sqs.DeleteQueueInput{
```

```
  QueueUrl: aws.String(queueUrl)})
 if err != nil {
  log.Printf("Couldn't delete queue %v. Here's why: %v\n", queueUrl, err)
 }
 return err
}
```

リソースをクリーンアップします。

```
import (
 "context"
 "fmt"
 "log"
 "topics_and_queues/actions"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 topicArn  string
 queueUrls []string
 snsActor  *actions.SnsActions
 sqsActor  *actions.SqsActions
}

// Cleanup deletes all AWS resources created during an example.
func (resources Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   fmt.Println("Something went wrong during cleanup. Use the AWS Management Console
\n" +
    "to remove any remaining resources that were created for this scenario.")
  }
 }()

 var err error
 if resources.topicArn != "" {
  log.Printf("Deleting topic %v.\n", resources.topicArn)
  err = resources.snsActor.DeleteTopic(ctx, resources.topicArn)
  if err != nil {
```

```
    panic(err)
   }
  }

  for _, queueUrl := range resources.queueUrls {
   log.Printf("Deleting queue %v.\n", queueUrl)
   err = resources.sqsActor.DeleteQueue(ctx, queueUrl)
   if err != nil {
    panic(err)
   }
  }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - CreateQueue
  - CreateTopic
  - DeleteMessageBatch
  - DeleteQueue
  - DeleteTopic
  - GetQueueAttributes
  - Publish
  - ReceiveMessage
  - SetQueueAttributes
  - Subscribe
  - Unsubscribe

サーバーレスサンプル

Amazon SNS トリガーから Lambda 関数を呼び出す

次のコード例は、SNS トピックからメッセージを受信することによってトリガーされるイベントを受け取る Lambda 関数を実装する方法を示しています。この関数はイベントパラメータからメッセージを取得し、各メッセージの内容を記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用して Lambda で SNS イベントの消費。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "fmt"

 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, snsEvent events.SNSEvent) {
 for _, record := range snsEvent.Records {
  processMessage(record)
 }
 fmt.Println("done")
}

func processMessage(record events.SNSEventRecord) {
 message := record.SNS.Message
 fmt.Printf("Processed message: %s\n", message)
 // TODO: Process your record here
}

func main() {
 lambda.Start(handler)
}
```

SDK for Go V2 を使用した Amazon SQS の例

次のコード例は、Amazon SQS で AWS SDK for Go V2 を使用してアクションを実行し、一般的なシナリオを実装する方法を示しています。

アクションはより大きなプログラムからのコードの抜粋であり、コンテキスト内で実行する必要があります。アクションは個々のサービス機能を呼び出す方法を示していますが、コンテキスト内のアクションは、関連するシナリオで確認できます。

シナリオは、1 つのサービス内から、または他の AWS のサービスと組み合わせて複数の関数を呼び出し、特定のタスクを実行する方法を示すコード例です。

各例には完全なソースコードへのリンクが含まれており、コンテキスト内でコードを設定および実行する方法の手順を確認できます。

トピック

- はじめに
- アクション
- シナリオ
- サーバーレスサンプル

はじめに

Hello Amazon SQS

次のコード例は、Amazon SQS の使用を開始する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
```

```
 "context"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Queue Service
// (Amazon SQS) client and list the queues in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 sqsClient := sqs.NewFromConfig(sdkConfig)
 fmt.Println("Let's list the queues for your account.")
 var queueUrls []string
 paginator := sqs.NewListQueuesPaginator(sqsClient, &sqs.ListQueuesInput{})
 for paginator.HasMorePages() {
  output, err := paginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get queues. Here's why: %v\n", err)
   break
  } else {
   queueUrls = append(queueUrls, output.QueueUrls...)
  }
 }
 if len(queueUrls) == 0 {
  fmt.Println("You don't have any queues!")
 } else {
  for _, queueUrl := range queueUrls {
   fmt.Printf("\t%v\n", queueUrl)
  }
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListQueues」を参照してください。

アクション

`CreateQueue`

次のコード例は、`CreateQueue` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// CreateQueue creates an Amazon SQS queue with the specified name. You can specify
// whether the queue is created as a FIFO queue.
```

```
func (actor SqsActions) CreateQueue(ctx context.Context, queueName string,
 isFifoQueue bool) (string, error) {
 var queueUrl string
 queueAttributes := map[string]string{}
 if isFifoQueue {
  queueAttributes["FifoQueue"] = "true"
 }
 queue, err := actor.SqsClient.CreateQueue(ctx, &sqs.CreateQueueInput{
  QueueName:  aws.String(queueName),
  Attributes: queueAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create queue %v. Here's why: %v\n", queueName, err)
 } else {
  queueUrl = *queue.QueueUrl
 }

 return queueUrl, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「CreateQueue」を参照してください。

`DeleteMessageBatch`

次のコード例は、`DeleteMessageBatch` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
```

```
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// DeleteMessages uses the DeleteMessageBatch action to delete a batch of messages
 from
// an Amazon SQS queue.
func (actor SqsActions) DeleteMessages(ctx context.Context, queueUrl string,
 messages []types.Message) error {
 entries := make([]types.DeleteMessageBatchRequestEntry, len(messages))
 for msgIndex := range messages {
  entries[msgIndex].Id = aws.String(fmt.Sprintf("%v", msgIndex))
  entries[msgIndex].ReceiptHandle = messages[msgIndex].ReceiptHandle
 }
 _, err := actor.SqsClient.DeleteMessageBatch(ctx, &sqs.DeleteMessageBatchInput{
  Entries:  entries,
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't delete messages from queue %v. Here's why: %v\n", queueUrl,
 err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteMessageBatch」を参照してください。

DeleteQueue

次のコード例は、DeleteQueue を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// DeleteQueue deletes an Amazon SQS queue.
func (actor SqsActions) DeleteQueue(ctx context.Context, queueUrl string) error {
 _, err := actor.SqsClient.DeleteQueue(ctx, &sqs.DeleteQueueInput{
  QueueUrl: aws.String(queueUrl)})
 if err != nil {
  log.Printf("Couldn't delete queue %v. Here's why: %v\n", queueUrl, err)
 }
 return err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「DeleteQueue」を参照してください。

`GetQueueAttributes`

次のコード例は、`GetQueueAttributes` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// GetQueueArn uses the GetQueueAttributes action to get the Amazon Resource Name
 (ARN)
// of an Amazon SQS queue.
```

```
func (actor SqsActions) GetQueueArn(ctx context.Context, queueUrl string) (string,
 error) {
 var queueArn string
 arnAttributeName := types.QueueAttributeNameQueueArn
 attribute, err := actor.SqsClient.GetQueueAttributes(ctx,
 &sqs.GetQueueAttributesInput{
  QueueUrl:       aws.String(queueUrl),
  AttributeNames: []types.QueueAttributeName{arnAttributeName},
 })
 if err != nil {
  log.Printf("Couldn't get ARN for queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  queueArn = attribute.Attributes[string(arnAttributeName)]
 }
 return queueArn, err
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「GetQueueAttributes」を参照してください。

`ListQueues`

次のコード例は、`ListQueues` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
package main

import (
 "context"
 "fmt"
 "log"
```

```
 "github.com/aws/aws-sdk-go-v2/config"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
)

// main uses the AWS SDK for Go V2 to create an Amazon Simple Queue Service
// (Amazon SQS) client and list the queues in your account.
// This example uses the default settings specified in your shared credentials
// and config files.
func main() {
 ctx := context.Background()
 sdkConfig, err := config.LoadDefaultConfig(ctx)
 if err != nil {
  fmt.Println("Couldn't load default configuration. Have you set up your AWS
 account?")
  fmt.Println(err)
  return
 }
 sqsClient := sqs.NewFromConfig(sdkConfig)
 fmt.Println("Let's list the queues for your account.")
 var queueUrls []string
 paginator := sqs.NewListQueuesPaginator(sqsClient, &sqs.ListQueuesInput{})
 for paginator.HasMorePages() {
  output, err := paginator.NextPage(ctx)
  if err != nil {
   log.Printf("Couldn't get queues. Here's why: %v\n", err)
   break
  } else {
   queueUrls = append(queueUrls, output.QueueUrls...)
  }
 }
 if len(queueUrls) == 0 {
  fmt.Println("You don't have any queues!")
 } else {
  for _, queueUrl := range queueUrls {
   fmt.Printf("\t%v\n", queueUrl)
  }
 }
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ListQueues」を参照してください。

`ReceiveMessage`

次のコード例は、`ReceiveMessage` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// GetMessages uses the ReceiveMessage action to get messages from an Amazon SQS
 queue.
func (actor SqsActions) GetMessages(ctx context.Context, queueUrl string,
 maxMessages int32, waitTime int32) ([]types.Message, error) {
 var messages []types.Message
 result, err := actor.SqsClient.ReceiveMessage(ctx, &sqs.ReceiveMessageInput{
  QueueUrl:            aws.String(queueUrl),
```

```
  MaxNumberOfMessages: maxMessages,
  WaitTimeSeconds:     waitTime,
 })
 if err != nil {
  log.Printf("Couldn't get messages from queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  messages = result.Messages
 }
 return messages, err
}
```

- API の詳細については、AWS SDK for Go API リファレンスの「ReceiveMessage」を参照してください。

`SetQueueAttributes`

次のコード例は、`SetQueueAttributes` を使用する方法を示しています。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
```

```
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// AttachSendMessagePolicy uses the SetQueueAttributes action to attach a policy to
 an
// Amazon SQS queue that allows the specified Amazon SNS topic to send messages to
 the
// queue.
func (actor SqsActions) AttachSendMessagePolicy(ctx context.Context, queueUrl
 string, queueArn string, topicArn string) error {
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:    "Allow",
   Action:    "sqs:SendMessage",
   Principal: map[string]string{"Service": "sns.amazonaws.com"},
   Resource:  aws.String(queueArn),
   Condition: PolicyCondition{"ArnEquals": map[string]string{"aws:SourceArn":
 topicArn}},
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document. Here's why: %v\n", err)
  return err
 }
 _, err = actor.SqsClient.SetQueueAttributes(ctx, &sqs.SetQueueAttributesInput{
  Attributes: map[string]string{
   string(types.QueueAttributeNamePolicy): string(policyBytes),
  },
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't set send message policy on queue %v. Here's why: %v\n",
 queueUrl, err)
 }
 return err
}

// PolicyDocument defines a policy document as a Go struct that can be serialized
```

```
// to JSON.
type PolicyDocument struct {
 Version   string
 Statement []PolicyStatement
}

// PolicyStatement defines a statement in a policy document.
type PolicyStatement struct {
 Effect    string
 Action    string
 Principal map[string]string `json:",omitempty"`
 Resource  *string           `json:",omitempty"`
 Condition PolicyCondition   `json:",omitempty"`
}

// PolicyCondition defines a condition in a policy.
type PolicyCondition map[string]map[string]string
```

- API の詳細については、「AWS SDK for Go API リファレンス」の「SetQueueAttributes」を参照してください。

シナリオ

メッセージをキューに発行する

次のコード例は、以下の操作方法を示しています。

- トピック (FIFO または非 FIFO) を作成します。
- フィルターを適用するオプションを使用して、複数のキューをトピックにサブスクライブします。
- メッセージをトピックに発行します。
- 受信したメッセージのキューをポーリングします。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。用例一覧を検索し、AWS コード例リポジトリでの設定と実行の方法を確認してください。

コマンドプロンプトからインタラクティブなシナリオを実行します。

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"
 "strings"
 "topics_and_queues/actions"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
 "github.com/awsdocs/aws-doc-sdk-examples/gov2/demotools"
)

const FIFO_SUFFIX = ".fifo"
const TONE_KEY = "tone"

var ToneChoices = []string{"cheerful", "funny", "serious", "sincere"}

// MessageBody is used to deserialize the body of a message from a JSON string.
type MessageBody struct {
 Message string
}

// ScenarioRunner separates the steps of this scenario into individual functions so
 that
// they are simpler to read and understand.
type ScenarioRunner struct {
 questioner demotools.IQuestioner
 snsActor   *actions.SnsActions
 sqsActor   *actions.SqsActions
```

```
}

func (runner ScenarioRunner) CreateTopic(ctx context.Context) (string, string, bool,
 bool) {
 log.Println("SNS topics can be configured as FIFO (First-In-First-Out) or standard.
\n" +
  "FIFO topics deliver messages in order and support deduplication and message
 filtering.")
 isFifoTopic := runner.questioner.AskBool("\nWould you like to work with FIFO
 topics? (y/n) ", "y")

 contentBasedDeduplication := false
 if isFifoTopic {
  log.Println(strings.Repeat("-", 88))
  log.Println("Because you have chosen a FIFO topic, deduplication is supported.\n"
 +
   "Deduplication IDs are either set in the message or are automatically generated
\n" +
   "from content using a hash function. If a message is successfully published to\n"
 +
   "an SNS FIFO topic, any message published and determined to have the same\n" +
   "deduplication ID, within the five-minute deduplication interval, is accepted\n"
 +
   "but not delivered. For more information about deduplication, see:\n" +
   "\thttps://docs.aws.amazon.com/sns/latest/dg/fifo-message-dedup.html.")
  contentBasedDeduplication = runner.questioner.AskBool(
   "\nDo you want to use content-based deduplication instead of entering a
 deduplication ID? (y/n) ", "y")
 }
 log.Println(strings.Repeat("-", 88))

 topicName := runner.questioner.Ask("Enter a name for your SNS topic. ")
 if isFifoTopic {
  topicName = fmt.Sprintf("%v%v", topicName, FIFO_SUFFIX)
  log.Printf("Because you have selected a FIFO topic, '%v' must be appended to\n"+
   "the topic name.", FIFO_SUFFIX)
 }

 topicArn, err := runner.snsActor.CreateTopic(ctx, topicName, isFifoTopic,
 contentBasedDeduplication)
 if err != nil {
  panic(err)
 }
 log.Printf("Your new topic with the name '%v' and Amazon Resource Name (ARN) \n"+
```

```
  "'%v' has been created.", topicName, topicArn)

 return topicName, topicArn, isFifoTopic, contentBasedDeduplication
}

func (runner ScenarioRunner) CreateQueue(ctx context.Context, ordinal string,
 isFifoTopic bool) (string, string) {
 queueName := runner.questioner.Ask(fmt.Sprintf("Enter a name for the %v SQS queue.
 ", ordinal))
 if isFifoTopic {
  queueName = fmt.Sprintf("%v%v", queueName, FIFO_SUFFIX)
  if ordinal == "first" {
   log.Printf("Because you are creating a FIFO SQS queue, '%v' must "+
    "be appended to the queue name.\n", FIFO_SUFFIX)
  }
 }
 queueUrl, err := runner.sqsActor.CreateQueue(ctx, queueName, isFifoTopic)
 if err != nil {
  panic(err)
 }
 log.Printf("Your new SQS queue with the name '%v' and the queue URL "+
  "'%v' has been created.", queueName, queueUrl)

 return queueName, queueUrl
}

func (runner ScenarioRunner) SubscribeQueueToTopic(
 ctx context.Context, queueName string, queueUrl string, topicName string, topicArn
 string, ordinal string,
 isFifoTopic bool) (string, bool) {

 queueArn, err := runner.sqsActor.GetQueueArn(ctx, queueUrl)
 if err != nil {
  panic(err)
 }
 log.Printf("The ARN of your queue is: %v.\n", queueArn)

 err = runner.sqsActor.AttachSendMessagePolicy(ctx, queueUrl, queueArn, topicArn)
 if err != nil {
  panic(err)
 }
 log.Println("Attached an IAM policy to the queue so the SNS topic can send " +
  "messages to it.")
 log.Println(strings.Repeat("-", 88))
```

```
var filterPolicy map[string][]string
if isFifoTopic {
 if ordinal == "first" {
  log.Println("Subscriptions to a FIFO topic can have filters.\n" +
   "If you add a filter to this subscription, then only the filtered messages\n" +
   "will be received in the queue.\n" +
   "For information about message filtering, see\n" +
   "\thttps://docs.aws.amazon.com/sns/latest/dg/sns-message-filtering.html\n" +
   "For this example, you can filter messages by a \"tone\" attribute.")
 }

 wantFiltering := runner.questioner.AskBool(
  fmt.Sprintf("Do you want to filter messages that are sent to \"%v\"\n"+
   "from the %v topic? (y/n) ", queueName, topicName), "y")
 if wantFiltering {
  log.Println("You can filter messages by one or more of the following \"tone\"
attributes.")

  var toneSelections []string
  askAboutTones := true
  for askAboutTones {
   toneIndex := runner.questioner.AskChoice(
    "Enter the number of the tone you want to filter by:\n", ToneChoices)
   toneSelections = append(toneSelections, ToneChoices[toneIndex])
   askAboutTones = runner.questioner.AskBool("Do you want to add another tone to
the filter? (y/n) ", "y")
  }
  log.Printf("Your subscription will be filtered to only pass the following tones:
%v\n", toneSelections)
  filterPolicy = map[string][]string{TONE_KEY: toneSelections}
 }
}

subscriptionArn, err := runner.snsActor.SubscribeQueue(ctx, topicArn, queueArn,
filterPolicy)
if err != nil {
 panic(err)
}
log.Printf("The queue %v is now subscribed to the topic %v with the subscription
ARN %v.\n",
 queueName, topicName, subscriptionArn)

return subscriptionArn, filterPolicy != nil
```

```
}

func (runner ScenarioRunner) PublishMessages(ctx context.Context, topicArn string,
 isFifoTopic bool, contentBasedDeduplication bool, usingFilters bool) {
 var message string
 var groupId string
 var dedupId string
 var toneSelection string
 publishMore := true
 for publishMore {
  groupId = ""
  dedupId = ""
  toneSelection = ""
  message = runner.questioner.Ask("Enter a message to publish: ")
  if isFifoTopic {
   log.Println("Because you are using a FIFO topic, you must set a message group ID.
\n" +
    "All messages within the same group will be received in the order they were
 published.")
   groupId = runner.questioner.Ask("Enter a message group ID: ")
   if !contentBasedDeduplication {
    log.Println("Because you are not using content-based deduplication,\n" +
     "you must enter a deduplication ID.")
    dedupId = runner.questioner.Ask("Enter a deduplication ID: ")
   }
  }
  if usingFilters {
   if runner.questioner.AskBool("Add a tone attribute so this message can be
 filtered? (y/n) ", "y") {
    toneIndex := runner.questioner.AskChoice(
     "Enter the number of the tone you want to filter by:\n", ToneChoices)
    toneSelection = ToneChoices[toneIndex]
   }
  }

  err := runner.snsActor.Publish(ctx, topicArn, message, groupId, dedupId, TONE_KEY,
 toneSelection)
  if err != nil {
   panic(err)
  }
  log.Println(("Your message was published."))

  publishMore = runner.questioner.AskBool("Do you want to publish another messsage?
 (y/n) ", "y")
```

```
 }
}

func (runner ScenarioRunner) PollForMessages(ctx context.Context, queueUrls
 []string) {
 log.Println("Polling queues for messages...")
 for _, queueUrl := range queueUrls {
  var messages []types.Message
  for {
   currentMsgs, err := runner.sqsActor.GetMessages(ctx, queueUrl, 10, 1)
   if err != nil {
    panic(err)
   }
   if len(currentMsgs) == 0 {
    break
   }
   messages = append(messages, currentMsgs...)
  }
  if len(messages) == 0 {
   log.Printf("No messages were received by queue %v.\n", queueUrl)
  } else if len(messages) == 1 {
   log.Printf("One message was received by queue %v:\n", queueUrl)

  } else {
   log.Printf("%v messages were received by queue %v:\n", len(messages), queueUrl)
  }
  for msgIndex, message := range messages {
   messageBody := MessageBody{}
   err := json.Unmarshal([]byte(*message.Body), &messageBody)
   if err != nil {
    panic(err)
   }
   log.Printf("Message %v: %v\n", msgIndex+1, messageBody.Message)
  }

  if len(messages) > 0 {
   log.Printf("Deleting %v messages from queue %v.\n", len(messages), queueUrl)
   err := runner.sqsActor.DeleteMessages(ctx, queueUrl, messages)
   if err != nil {
    panic(err)
   }
  }
 }
}
```

```
// RunTopicsAndQueuesScenario is an interactive example that shows you how to use
 the
// AWS SDK for Go to create and use Amazon SNS topics and Amazon SQS queues.
//
// 1. Create a topic (FIFO or non-FIFO).
// 2. Subscribe several queues to the topic with an option to apply a filter.
// 3. Publish messages to the topic.
// 4. Poll the queues for messages received.
// 5. Delete the topic and the queues.
//
// This example creates service clients from the specified sdkConfig so that
// you can replace it with a mocked or stubbed config for unit testing.
//
// It uses a questioner from the `demotools` package to get input during the
 example.
// This package can be found in the ..\..\demotools folder of this repo.
func RunTopicsAndQueuesScenario(
 ctx context.Context, sdkConfig aws.Config, questioner demotools.IQuestioner) {
 resources := Resources{}
 defer func() {
  if r := recover(); r != nil {
   log.Println("Something went wrong with the demo.\n" +
    "Cleaning up any resources that were created...")
   resources.Cleanup(ctx)
  }
 }()
 queueCount := 2

 log.Println(strings.Repeat("-", 88))
 log.Printf("Welcome to messaging with topics and queues.\n\n"+
  "In this scenario, you will create an SNS topic and subscribe %v SQS queues to the
\n"+
  "topic. You can select from several options for configuring the topic and the\n"+
  "subscriptions for the queues. You can then post to the topic and see the results
\n"+
  "in the queues.\n", queueCount)

 log.Println(strings.Repeat("-", 88))

 runner := ScenarioRunner{
  questioner: questioner,
  snsActor:   &actions.SnsActions{SnsClient: sns.NewFromConfig(sdkConfig)},
  sqsActor:   &actions.SqsActions{SqsClient: sqs.NewFromConfig(sdkConfig)},
```

```
 }
 resources.snsActor = runner.snsActor
 resources.sqsActor = runner.sqsActor

 topicName, topicArn, isFifoTopic, contentBasedDeduplication :=
 runner.CreateTopic(ctx)
 resources.topicArn = topicArn
 log.Println(strings.Repeat("-", 88))

 log.Printf("Now you will create %v SQS queues and subscribe them to the topic.\n",
 queueCount)
 ordinals := []string{"first", "next"}
 usingFilters := false
 for _, ordinal := range ordinals {
  queueName, queueUrl := runner.CreateQueue(ctx, ordinal, isFifoTopic)
  resources.queueUrls = append(resources.queueUrls, queueUrl)

  _, filtering := runner.SubscribeQueueToTopic(ctx, queueName, queueUrl, topicName,
 topicArn, ordinal, isFifoTopic)
  usingFilters = usingFilters || filtering
 }

 log.Println(strings.Repeat("-", 88))
 runner.PublishMessages(ctx, topicArn, isFifoTopic, contentBasedDeduplication,
 usingFilters)
 log.Println(strings.Repeat("-", 88))
 runner.PollForMessages(ctx, resources.queueUrls)

 log.Println(strings.Repeat("-", 88))

 wantCleanup := questioner.AskBool("Do you want to remove all AWS resources created
 for this scenario? (y/n) ", "y")
 if wantCleanup {
  log.Println("Cleaning up resources...")
  resources.Cleanup(ctx)
 }

 log.Println(strings.Repeat("-", 88))
 log.Println("Thanks for watching!")
 log.Println(strings.Repeat("-", 88))
}
```

この例で使用されている Amazon SNS アクションをラップする構造体を定義します。

```
import (
 "context"
 "encoding/json"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sns"
 "github.com/aws/aws-sdk-go-v2/service/sns/types"
)

// SnsActions encapsulates the Amazon Simple Notification Service (Amazon SNS)
 actions
// used in the examples.
type SnsActions struct {
 SnsClient *sns.Client
}



// CreateTopic creates an Amazon SNS topic with the specified name. You can
 optionally
// specify that the topic is created as a FIFO topic and whether it uses content-
based
// deduplication instead of ID-based deduplication.
func (actor SnsActions) CreateTopic(ctx context.Context, topicName string,
 isFifoTopic bool, contentBasedDeduplication bool) (string, error) {
 var topicArn string
 topicAttributes := map[string]string{}
 if isFifoTopic {
  topicAttributes["FifoTopic"] = "true"
 }
 if contentBasedDeduplication {
  topicAttributes["ContentBasedDeduplication"] = "true"
 }
 topic, err := actor.SnsClient.CreateTopic(ctx, &sns.CreateTopicInput{
  Name:       aws.String(topicName),
  Attributes: topicAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create topic %v. Here's why: %v\n", topicName, err)
 } else {
```

```
  topicArn = *topic.TopicArn
 }

 return topicArn, err
}



// DeleteTopic delete an Amazon SNS topic.
func (actor SnsActions) DeleteTopic(ctx context.Context, topicArn string) error {
 _, err := actor.SnsClient.DeleteTopic(ctx, &sns.DeleteTopicInput{
  TopicArn: aws.String(topicArn)})
 if err != nil {
  log.Printf("Couldn't delete topic %v. Here's why: %v\n", topicArn, err)
 }
 return err
}



// SubscribeQueue subscribes an Amazon Simple Queue Service (Amazon SQS) queue to an
// Amazon SNS topic. When filterMap is not nil, it is used to specify a filter
 policy
// so that messages are only sent to the queue when the message has the specified
 attributes.
func (actor SnsActions) SubscribeQueue(ctx context.Context, topicArn string,
 queueArn string, filterMap map[string][]string) (string, error) {
 var subscriptionArn string
 var attributes map[string]string
 if filterMap != nil {
  filterBytes, err := json.Marshal(filterMap)
  if err != nil {
   log.Printf("Couldn't create filter policy, here's why: %v\n", err)
   return "", err
  }
  attributes = map[string]string{"FilterPolicy": string(filterBytes)}
 }
 output, err := actor.SnsClient.Subscribe(ctx, &sns.SubscribeInput{
  Protocol:              aws.String("sqs"),
  TopicArn:              aws.String(topicArn),
  Attributes:            attributes,
  Endpoint:              aws.String(queueArn),
  ReturnSubscriptionArn: true,
 })
```

```
 if err != nil {
  log.Printf("Couldn't susbscribe queue %v to topic %v. Here's why: %v\n",
   queueArn, topicArn, err)
 } else {
  subscriptionArn = *output.SubscriptionArn
 }

 return subscriptionArn, err
}



// Publish publishes a message to an Amazon SNS topic. The message is then sent to
 all
// subscribers. When the topic is a FIFO topic, the message must also contain a
 group ID
// and, when ID-based deduplication is used, a deduplication ID. An optional key-
value
// filter attribute can be specified so that the message can be filtered according
 to
// a filter policy.
func (actor SnsActions) Publish(ctx context.Context, topicArn string, message
 string, groupId string, dedupId string, filterKey string, filterValue string) error
 {
 publishInput := sns.PublishInput{TopicArn: aws.String(topicArn), Message:
 aws.String(message)}
 if groupId != "" {
  publishInput.MessageGroupId = aws.String(groupId)
 }
 if dedupId != "" {
  publishInput.MessageDeduplicationId = aws.String(dedupId)
 }
 if filterKey != "" && filterValue != "" {
  publishInput.MessageAttributes = map[string]types.MessageAttributeValue{
   filterKey: {DataType: aws.String("String"), StringValue:
 aws.String(filterValue)},
  }
 }
 _, err := actor.SnsClient.Publish(ctx, &publishInput)
 if err != nil {
  log.Printf("Couldn't publish message to topic %v. Here's why: %v", topicArn, err)
 }
 return err
}
```

この例で使用されている Amazon SQS アクションをラップする構造体を定義します。

```
import (
 "context"
 "encoding/json"
 "fmt"
 "log"

 "github.com/aws/aws-sdk-go-v2/aws"
 "github.com/aws/aws-sdk-go-v2/service/sqs"
 "github.com/aws/aws-sdk-go-v2/service/sqs/types"
)

// SqsActions encapsulates the Amazon Simple Queue Service (Amazon SQS) actions
// used in the examples.
type SqsActions struct {
 SqsClient *sqs.Client
}



// CreateQueue creates an Amazon SQS queue with the specified name. You can specify
// whether the queue is created as a FIFO queue.
func (actor SqsActions) CreateQueue(ctx context.Context, queueName string,
 isFifoQueue bool) (string, error) {
 var queueUrl string
 queueAttributes := map[string]string{}
 if isFifoQueue {
  queueAttributes["FifoQueue"] = "true"
 }
 queue, err := actor.SqsClient.CreateQueue(ctx, &sqs.CreateQueueInput{
  QueueName:  aws.String(queueName),
  Attributes: queueAttributes,
 })
 if err != nil {
  log.Printf("Couldn't create queue %v. Here's why: %v\n", queueName, err)
 } else {
  queueUrl = *queue.QueueUrl
 }
```

```
 return queueUrl, err
}



// GetQueueArn uses the GetQueueAttributes action to get the Amazon Resource Name
 (ARN)
// of an Amazon SQS queue.
func (actor SqsActions) GetQueueArn(ctx context.Context, queueUrl string) (string,
 error) {
 var queueArn string
 arnAttributeName := types.QueueAttributeNameQueueArn
 attribute, err := actor.SqsClient.GetQueueAttributes(ctx,
 &sqs.GetQueueAttributesInput{
  QueueUrl:       aws.String(queueUrl),
  AttributeNames: []types.QueueAttributeName{arnAttributeName},
 })
 if err != nil {
  log.Printf("Couldn't get ARN for queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  queueArn = attribute.Attributes[string(arnAttributeName)]
 }
 return queueArn, err
}



// AttachSendMessagePolicy uses the SetQueueAttributes action to attach a policy to
 an
// Amazon SQS queue that allows the specified Amazon SNS topic to send messages to
 the
// queue.
func (actor SqsActions) AttachSendMessagePolicy(ctx context.Context, queueUrl
 string, queueArn string, topicArn string) error {
 policyDoc := PolicyDocument{
  Version: "2012-10-17",
  Statement: []PolicyStatement{{
   Effect:    "Allow",
   Action:    "sqs:SendMessage",
   Principal: map[string]string{"Service": "sns.amazonaws.com"},
   Resource:  aws.String(queueArn),
   Condition: PolicyCondition{"ArnEquals": map[string]string{"aws:SourceArn":
 topicArn}},
```

```
  }},
 }
 policyBytes, err := json.Marshal(policyDoc)
 if err != nil {
  log.Printf("Couldn't create policy document. Here's why: %v\n", err)
  return err
 }
 _, err = actor.SqsClient.SetQueueAttributes(ctx, &sqs.SetQueueAttributesInput{
  Attributes: map[string]string{
   string(types.QueueAttributeNamePolicy): string(policyBytes),
  },
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't set send message policy on queue %v. Here's why: %v\n",
 queueUrl, err)
 }
 return err
}

// PolicyDocument defines a policy document as a Go struct that can be serialized
// to JSON.
type PolicyDocument struct {
 Version   string
 Statement []PolicyStatement
}

// PolicyStatement defines a statement in a policy document.
type PolicyStatement struct {
 Effect    string
 Action    string
 Principal map[string]string `json:",omitempty"`
 Resource  *string           `json:",omitempty"`
 Condition PolicyCondition   `json:",omitempty"`
}

// PolicyCondition defines a condition in a policy.
type PolicyCondition map[string]map[string]string



// GetMessages uses the ReceiveMessage action to get messages from an Amazon SQS
 queue.
```

```
func (actor SqsActions) GetMessages(ctx context.Context, queueUrl string,
 maxMessages int32, waitTime int32) ([]types.Message, error) {
 var messages []types.Message
 result, err := actor.SqsClient.ReceiveMessage(ctx, &sqs.ReceiveMessageInput{
  QueueUrl:            aws.String(queueUrl),
  MaxNumberOfMessages: maxMessages,
  WaitTimeSeconds:     waitTime,
 })
 if err != nil {
  log.Printf("Couldn't get messages from queue %v. Here's why: %v\n", queueUrl, err)
 } else {
  messages = result.Messages
 }
 return messages, err
}



// DeleteMessages uses the DeleteMessageBatch action to delete a batch of messages
 from
// an Amazon SQS queue.
func (actor SqsActions) DeleteMessages(ctx context.Context, queueUrl string,
 messages []types.Message) error {
 entries := make([]types.DeleteMessageBatchRequestEntry, len(messages))
 for msgIndex := range messages {
  entries[msgIndex].Id = aws.String(fmt.Sprintf("%v", msgIndex))
  entries[msgIndex].ReceiptHandle = messages[msgIndex].ReceiptHandle
 }
 _, err := actor.SqsClient.DeleteMessageBatch(ctx, &sqs.DeleteMessageBatchInput{
  Entries:  entries,
  QueueUrl: aws.String(queueUrl),
 })
 if err != nil {
  log.Printf("Couldn't delete messages from queue %v. Here's why: %v\n", queueUrl,
 err)
 }
 return err
}



// DeleteQueue deletes an Amazon SQS queue.
func (actor SqsActions) DeleteQueue(ctx context.Context, queueUrl string) error {
 _, err := actor.SqsClient.DeleteQueue(ctx, &sqs.DeleteQueueInput{
```

```
  QueueUrl: aws.String(queueUrl)})
 if err != nil {
  log.Printf("Couldn't delete queue %v. Here's why: %v\n", queueUrl, err)
 }
 return err
}
```

リソースをクリーンアップします。

```
import (
 "context"
 "fmt"
 "log"
 "topics_and_queues/actions"
)

// Resources keeps track of AWS resources created during an example and handles
// cleanup when the example finishes.
type Resources struct {
 topicArn  string
 queueUrls []string
 snsActor  *actions.SnsActions
 sqsActor  *actions.SqsActions
}

// Cleanup deletes all AWS resources created during an example.
func (resources Resources) Cleanup(ctx context.Context) {
 defer func() {
  if r := recover(); r != nil {
   fmt.Println("Something went wrong during cleanup. Use the AWS Management Console
\n" +
    "to remove any remaining resources that were created for this scenario.")
  }
 }()

 var err error
 if resources.topicArn != "" {
  log.Printf("Deleting topic %v.\n", resources.topicArn)
  err = resources.snsActor.DeleteTopic(ctx, resources.topicArn)
  if err != nil {
```

```
   panic(err)
  }
 }

 for _, queueUrl := range resources.queueUrls {
  log.Printf("Deleting queue %v.\n", queueUrl)
  err = resources.sqsActor.DeleteQueue(ctx, queueUrl)
  if err != nil {
   panic(err)
  }
 }
}
```

- API の詳細については、「AWS SDK for Go API リファレンス」の以下のトピックを参照してください。
  - CreateQueue
  - CreateTopic
  - DeleteMessageBatch
  - DeleteQueue
  - DeleteTopic
  - GetQueueAttributes
  - Publish
  - ReceiveMessage
  - SetQueueAttributes
  - Subscribe
  - Unsubscribe

サーバーレスサンプル

Amazon SQS トリガーから Lambda 関数を呼び出す

次のコード例では、SQS キューからメッセージを受信することによってトリガーされるイベントを受け取る、Lambda 関数の実装方法を示しています。この関数はイベントパラメータからメッセージを取得し、各メッセージの内容を記録します。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda での SQS イベントの消費。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package integration_sqs_to_lambda

import (
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(event events.SQSEvent) error {
 for _, record := range event.Records {
  err := processMessage(record)
  if err != nil {
   return err
  }
 }
 fmt.Println("done")
 return nil
}

func processMessage(record events.SQSMessage) error {
 fmt.Printf("Processed message %s\n", record.Body)
 // TODO: Do interesting work based on the new message
 return nil
}

func main() {
 lambda.Start(handler)
}
```

Amazon SQS トリガーを使用した Lambda 関数でのバッチアイテム失敗のレポート

以下のコード例では、SQS キューからイベントを受け取る Lambda 関数のための、部分的なバッチレスポンスの実装方法を示しています。この関数は、レスポンスとしてバッチアイテムの失敗を報告し、対象のメッセージを後で再試行するよう Lambda に伝えます。

SDK for Go V2

> **Note**
>
> GitHub には、その他のリソースもあります。サーバーレスサンプルリポジトリで完全な例を見つけて、設定と実行の方法を確認してください。

Go を使用した Lambda での SQS バッチアイテム失敗のレポート。

```
// Copyright Amazon.com, Inc. or its affiliates. All Rights Reserved.
// SPDX-License-Identifier: Apache-2.0
package main

import (
 "context"
 "fmt"
 "github.com/aws/aws-lambda-go/events"
 "github.com/aws/aws-lambda-go/lambda"
)

func handler(ctx context.Context, sqsEvent events.SQSEvent) (map[string]interface{},
 error) {
 batchItemFailures := []map[string]interface{}{}

 for _, message := range sqsEvent.Records {
  if len(message.Body) > 0 {
   // Your message processing condition here
   fmt.Printf("Successfully processed message: %s\n", message.Body)
  } else {
   // Message processing failed
   fmt.Printf("Failed to process message %s\n", message.MessageId)
   batchItemFailures = append(batchItemFailures, map[string]interface{}
{"itemIdentifier": message.MessageId})
  }
 }
```

```
 sqsBatchResponse := map[string]interface{}{
  "batchItemFailures": batchItemFailures,
 }
 return sqsBatchResponse, nil
}

func main() {
 lambda.Start(handler)
}
```

v2 AWS SDK for Go への移行

Go の最小バージョン要件

には、Go 1.23 の最小バージョン AWS SDK for Go が必要です。Go の最新バージョンは「Downloads」ページからダウンロードできます。Go の各バージョンのリリース内容およびアップグレードの詳細については、「Release History」を参照してください。

モジュール化

AWS SDK for Go は、Go 1.13 のデフォルト開発モードになった Go モジュールを利用するように更新されました。SDK が提供する多くのパッケージはモジュール化され、それぞれ個別にバージョン管理およびリリースされています。この変更により、アプリケーションの依存関係モデリングが向上し、SDK が Go モジュールのバージョニング戦略に沿って新機能を提供できるようになります。

SDK が提供する主な Go モジュールのリストを次に示します。

モジュール	説明
`github.com/aws/aws-sdk-go-v2`	SDK コア
`github.com/aws/aws-sdk-go-v2/config`	共有設定のロード
`github.com/aws/aws-sdk-go-v2/credentials`	AWS 認証情報プロバイダー
`github.com/aws/aws-sdk-go-v2/feature/ec2/imds`	Amazon EC2 インスタンスメタデータのサービスクライアント

SDK のサービスクライアントおよび高レベルユーティリティモジュールは、次のインポートパス下にネストされています。

インポートルート	説明
github.com/aws/aws-sdk-go-v2/service/	サービスクライアントモジュール
github.com/aws/aws-sdk-go-v2/feature/	Amazon S3 Transfer Manager などのサービス用の高レベルユーティリティ

設定のロード

session パッケージとその関連機能は、config パッケージによって提供される簡素化された設定システムに置き換えられました。config パッケージは個別の Go モジュールであり、go get を使用してアプリケーションの依存関係に含めることができます。

```
go get github.com/aws/aws-sdk-go-v2/config
```

session.New、session.NewSession、NewSessionWithOptions、および session.Must は config.LoadDefaultConfig に移行する必要があります。

config パッケージには、共有設定のロードをプログラムでオーバーライドするためのヘルパー関数がいくつか用意されています。これらの関数名は、With の後に、オーバーライドするオプション名が続く形式になっています。session パッケージの使用方法をどのように移行するかについていくつか例を見てみましょう。

共有設定のロードの詳細については、「SDK を設定」を参照してください。

例

NewSession から LoadDefaultConfig への移行

次の例では、追加の引数を指定せずに session.NewSession を使用していたコードを config.LoadDefaultConfig に移行する方法を示しています。

```
// V1 using NewSession

import "github.com/aws/aws-sdk-go/aws/session"

// ...
```

```
sess, err := session.NewSession()
if err != nil {
    // handle error
}
```

```
// V2 using LoadDefaultConfig

import "context"
import "github.com/aws/aws-sdk-go-v2/config"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    // handle error
}
```

aws.Config オプションを使用した NewSession からの移行

この例では、設定のロード中にオーバーライドされた aws.Config 値をどのように移行するかを示しています。config.With* に 1 つ以上の config.LoadDefaultConfig ヘルパー関数を指定することで、ロードされた設定値をオーバーライドできます。この例では、 AWS リージョンは config.WithRegion ヘルパー関数us-west-2を使用して に上書きされます。

```
// V1

import "github.com/aws/aws-sdk-go/aws"
import "github.com/aws/aws-sdk-go/aws/session"

// ...

sess, err := session.NewSession(aws.Config{
    Region: aws.String("us-west-2")
})
if err != nil {
    // handle error
}
```

```
// V2
```

```
import "context"
import "github.com/aws/aws-sdk-go-v2/config"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO(),
    config.WithRegion("us-west-2"),
)
if err != nil {
    // handle error
}
```

NewSessionWithOptions からの移行

この例では、設定のロード中にオーバーライドされた値をどのように移行するかを示しています。config.LoadDefaultConfig に 0 個以上の config.With* ヘルパー関数を指定することで、ロードされた設定値をオーバーライドできます。この例では、 AWS SDK 共有設定をロードするときに使用するターゲットプロファイルを上書きする方法を示します。

```
// V1

import "github.com/aws/aws-sdk-go/aws"
import "github.com/aws/aws-sdk-go/aws/session"

// ...

sess, err := session.NewSessionWithOptions(aws.Config{
    Profile: "my-application-profile"
})
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/config"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO(),
    config.WithSharedConfigProfile("my-application-profile"),
```

```
)
if err != nil {
    // handle error
}
```

モック化と *iface

*iface パッケージおよびその中に含まれるインターフェイス (例: s3iface.S3API) は削除されました。これらのインターフェイス定義は、サービスに新しいオペレーションが追加されるたびに壊れるため、安定していません。

*iface の使用は、利用するサービスオペレーションに応じて、呼び出し元で定義したスコープ付きのインターフェイスに置き換える必要があります。

```
// V1

import "io"

import "github.com/aws/aws-sdk-go/service/s3"
import "github.com/aws/aws-sdk-go/service/s3/s3iface"

func GetObjectBytes(client s3iface.S3API, bucket, key string) ([]byte, error) {
    object, err := client.GetObject(&s3.GetObjectInput{
        Bucket: &bucket,
        Key:    &key,
    })
    if err != nil {
        return nil, err
    }
    defer object.Body.Close()

    return io.ReadAll(object.Body)
}
```

```
// V2

import "context"
import "io"

import "github.com/aws/aws-sdk-go-v2/service/s3"
```

```
type GetObjectAPIClient interface {
    GetObject(context.Context, *s3.GetObjectInput, ...func(*s3.Options))
 (*s3.GetObjectOutput, error)
}

func GetObjectBytes(ctx context.Context, client GetObjectAPIClient, bucket, key string)
 ([]byte, error) {
    object, err := client.GetObject(ctx, &s3.GetObjectInput{
        Bucket: &bucket,
        Key:    &key,
    })
    if err != nil {
        return nil, err
    }
    defer object.Body.Close()

    return io.ReadAll(object.Body)
}
```

詳細については、「AWS SDK for Go v2 を使用したユニットテスト」を参照してください。

認証情報と認証情報プロバイダー

aws/credentials パッケージおよび関連する認証情報プロバイダーは credentials パッケージの場所に移動されました。credentials パッケージは Go モジュールであり、go get を使用して取得します。

```
go get github.com/aws/aws-sdk-go-v2/credentials
```

AWS SDK for Go v2 リリースでは AWS 、認証情報プロバイダーが更新され、認証情報を取得 AWS するための一貫したインターフェイスが提供されます。各プロバイダーは aws.CredentialsProvider インターフェイスを実装します。これは、v1 credentials(aws.Credentials, error).Value タイプに類似した . aws.Credentials AWS SDK for Go を返すRetrieveメソッドを定義します。

認証情報のキャッシュを行うには、aws.CredentialsProvider オブジェクトを aws.CredentialsCache でラップする必要があります。NewCredentialsCache を使用して aws.CredentialsCache オブジェクトを作成します。デフォルトでは、config.LoadDefaultConfig によって設定された認証情報は aws.CredentialsCache でラップされます。

次の表は、認証情報プロバイダーの場所を AWS AWS SDK for Go v1 から v2 に変更したものです。

Name	V1 のインポート	V2 のインポート
Amazon EC2 IAM ロールの認証情報	`github.com/aws/aws-sdk-go/aws/credentials/ec2rolecreds`	`github.com/aws/aws-sdk-go-v2/credentials/ec2rolecreds`
エンドポイント認証情報	`github.com/aws/aws-sdk-go/aws/credentials/endpointcreds`	`github.com/aws/aws-sdk-go-v2/credentials/endpointcreds`
プロセス認証情報	`github.com/aws/aws-sdk-go/aws/credentials/processcreds`	`github.com/aws/aws-sdk-go-v2/credentials/processcreds`
AWS Security Token Service	`github.com/aws/aws-sdk-go/aws/credentials/stscreds`	`github.com/aws/aws-sdk-go-v2/credentials/stscreds`

静的な認証情報

credentials.NewStaticCredentials を用いて静的認証情報をプログラムで作成するアプリケーションは、Credentials.NewStaticCredentialsProvider を使用する必要があります。

例

```
// V1

import "github.com/aws/aws-sdk-go/aws/credentials"

// ...

appCreds := credentials.NewStaticCredentials(accessKey, secretKey, sessionToken)
value, err := appCreds.Get()
if err != nil {
    // handle error
}
```

```
// V2
```

```
import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/credentials"

// ...

appCreds := aws.NewCredentialsCache(credentials.NewStaticCredentialsProvider(accessKey,
 secretKey, sessionToken))
value, err := appCreds.Retrieve(context.TODO())
if err != nil {
    // handle error
}
```

Amazon EC2 IAM ロールの認証情報

NewCredentials および NewCredentialsWithClient の使用は New の使用に移行する必要があります。

ec2rolecreds パッケージの ec2rolecreds.New は、ec2rolecreds.Options の関数型オプションを入力として受け取ります。これにより、使用する特定の Amazon EC2 インスタンスメタデータサービスクライアントをオーバーライドしたり、認証情報の有効期限をオーバーライドしたりできます。

例

```
// V1

import "github.com/aws/aws-sdk-go/aws/credentials/ec2rolecreds"

// ...

appCreds := ec2rolecreds.NewCredentials(sess)
value, err := appCreds.Get()
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/credentials/ec2rolecreds"
```

```
// ...

// New returns an object of a type that satisfies the aws.CredentialProvider interface
appCreds := aws.NewCredentialsCache(ec2rolecreds.New())
value, err := appCreds.Retrieve(context.TODO())
if err != nil {
    // handle error
}
```

エンドポイント認証情報

NewCredentialsClient および NewProviderClient の使用は New の使用に移行する必要があります。

endpointcreds パッケージの New 関数は、認証情報を取得する HTTP または HTTPS エンドポイントの URL を含む文字列引数と、endpointcreds.Options の関数型オプションを受け取って、認証情報プロバイダーの変更、特定の設定のオーバーライドができます。

プロセス認証情報

NewCredentials、NewCredentialsCommand、NewCredentialsTimeout の使用は NewProvider または NewProviderCommand の使用に移行する必要があります。

processcreds パッケージの NewProvider 関数は、ホスト環境のシェルで実行するコマンドの文字列引数と、Options の関数型オプションを受け取って、認証情報プロバイダーの変更、特定の設定のオーバーライドができます。

NewProviderCommand は、より複雑なプロセスコマンド (1 つ以上のコマンドライン引数を取るものや、特定の実行環境要件があるものなど) を定義する NewCommandBuilder インターフェイスの実装を受け取ります。DefaultNewCommandBuilder はこのインターフェイスを実装しており、複数のコマンドライン引数を必要とするプロセスのコマンドビルダーを定義します。

例

```
// V1

import "github.com/aws/aws-sdk-go/aws/credentials/processcreds"

// ...

appCreds := processcreds.NewCredentials("/path/to/command")
value, err := appCreds.Get()
```

```
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/credentials/processcreds"

// ...

appCreds := aws.NewCredentialsCache(processcreds.NewProvider("/path/to/command"))
value, err := appCreds.Retrieve(context.TODO())
if err != nil {
    // handle error
}
```

AWS Security Token Service 認証情報

AssumeRole

NewCredentials および NewCredentialsWithClient の使用は NewAssumeRoleProvider の使用に移行する必要があります。

stscreds パッケージの NewAssumeRoleProvider関数は、sts.Client、および指定された の設定済み認証情報から引き受ける AWS Identity and Access Management ロール ARN を使用して呼びsts.Client出す必要があります。AssumeRoleOptions の関数型オプションを指定して、プロバイダーの他のオプション設定を変更することもできます。

例

```
// V1

import "github.com/aws/aws-sdk-go/aws/credentials/stscreds"

// ...

appCreds := stscreds.NewCredentials(sess, "arn:aws:iam::123456789012:role/demo")
value, err := appCreds.Get()
if err != nil {
    // handle error
```

```
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/credentials/stscreds"
import "github.com/aws/aws-sdk-go-v2/service/sts"

// ...

client := sts.NewFromConfig(cfg)

appCreds := stscreds.NewAssumeRoleProvider(client, "arn:aws:iam::123456789012:role/
demo")
value, err := appCreds.Retrieve(context.TODO())
if err != nil {
    // handle error
}
```

AssumeRoleWithWebIdentity

NewWebIdentityCredentials、NewWebIdentityRoleProvider、NewWebIdentityRoleProviderWithToken の使用は NewWebIdentityRoleProvider の使用に移行する必要があります。

`stscreds` パッケージの `NewWebIdentityRoleProvider`関数は、sts.Client、指定された `sts.Client`の設定済み認証情報を使用して引き受ける AWS Identity and Access Management ロール ARN、および OAuth 2.0 または OpenID Connect ID トークンを提供するための IdentityTokenRetriever の実装を使用して呼び出す必要があります。IdentityTokenFile は、アプリケーションのホストファイルシステム上のファイルからウェブ ID トークンを提供するために使用できる `IdentityTokenRetriever` です。WebIdentityRoleOptions の関数型オプションを指定して、プロバイダーの他のオプション設定を変更することもできます。

例

```
// V1

import "github.com/aws/aws-sdk-go/aws/credentials/stscreds"

// ...

appCreds := stscreds.NewWebIdentityRoleProvider(sess, "arn:aws:iam::123456789012:role/
demo", "sessionName", "/path/to/token")
```

```
value, err := appCreds.Get()
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/aws"
import "github.com/aws/aws-sdk-go-v2/credentials/stscreds"
import "github.com/aws/aws-sdk-go-v2/service/sts"

// ...

client := sts.NewFromConfig(cfg)

appCreds := aws.NewCredentialsCache(stscreds.NewWebIdentityRoleProvider(
        client,
        "arn:aws:iam::123456789012:role/demo",
        stscreds.IdentityTokenFile("/path/to/file"),
        func(o *stscreds.WebIdentityRoleOptions) {
            o.RoleSessionName = "sessionName"
        }))
value, err := appCreds.Retrieve(context.TODO())
if err != nil {
    // handle error
}
```

サービスクライアント

AWS SDK for Go は、github.com/aws/aws-sdk-go-v2/serviceインポートパスの下にネストされたサービスクライアントモジュールを提供します。各サービスクライアントは、各サービスの一意の ID を使用した Go パッケージに含まれています。次の表では、 AWS SDK for Goにおけるサービスインポートパスの例をいくつか示しています。

サービス名	V1 インポートパス	V2 インポートパス
Amazon S3	github.com/aws/aws-sdk-go/service/s3	github.com/aws/aws-sdk-go-v2/service/s3

サービス名	V1 インポートパス	V2 インポートパス
Amazon DynamoDB	`github.com/aws/aws-sdk-go/service/dynamodb`	`github.com/aws/aws-sdk-go-v2/service/dynamodb`
Amazon CloudWatch Logs	`github.com/aws/aws-sdk-go/service/cloudwatchlogs`	`github.com/aws/aws-sdk-go-v2/service/cloudwatchlogs`

各サービスクライアントパッケージは、個別にバージョニングされた Go モジュールです。サービスクライアントをアプリケーションの依存関係として追加するには、`go get` コマンドでサービスのインポートパスを指定します。例えば、Amazon S3 クライアントを依存関係に追加するには、次のようにします。

```
go get github.com/aws/aws-sdk-go-v2/service/s3
```

クライアントの作成

クライアントのパッケージの `New`または コン`NewFromConfig`ストラクタ関数 AWS SDK for Go を使用して、 でクライアントを構築できます。 AWS SDK for Go v1 から移行する場合は、 `NewFromConfig`バリアントを使用することをお勧めします。これにより、 の値を使用して新しいサービスクライアントが返されます`aws.Config`。`aws.Config` の値は、`config.LoadDefaultConfig` を使用して SDK の共有設定をロードするときに作成されます。サービスクライアントの作成の詳細については、「AWS SDK for Go v2 を用いた AWS サービスを使用する」を参照してください。

例 1

```
// V1

import "github.com/aws/aws-sdk-go/aws/session"
import "github.com/aws/aws-sdk-go/service/s3"

// ...

sess, err := session.NewSession()
if err != nil {
```

```
    // handle error
}

client := s3.New(sess)
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    // handle error
}

client := s3.NewFromConfig(cfg)
```

例 2: クライアント設定のオーバーライド

```
// V1

import "github.com/aws/aws-sdk-go/aws"
import "github.com/aws/aws-sdk-go/aws/session"
import "github.com/aws/aws-sdk-go/service/s3"

// ...

sess, err := session.NewSession()
if err != nil {
    // handle error
}

client := s3.New(sess, &aws.Config{
    Region: aws.String("us-west-2"),
})
```

```
// V2

import "context"
```

```
import "github.com/aws/aws-sdk-go-v2/config"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

cfg, err := config.LoadDefaultConfig(context.TODO())
if err != nil {
    // handle error
}

client := s3.NewFromConfig(cfg, func(o *s3.Options) {
    o.Region = "us-west-2"
})
```

エンドポイント

endpoints パッケージは AWS SDK for Goに含まれなくなりました。各サービスクライアントは、クライアントパッケージに必要な AWS エンドポイントメタデータを埋め込むようになりました。これにより、アプリケーションで使用されていないサービスのエンドポイントメタデータが含まれなくなるため、コンパイルされたアプリケーションの全体的なバイナリサイズが削減されます。

さらに、各サービスはエンドポイント解決のための独自のインターフェイス
を EndpointResolverV2 で公開するようになりました。各 API はサービスの
EndpointParameters に固有のパラメータ群を受け取り、これらの値はオペレーション呼び出し時に SDK がさまざまな場所から取得します。

デフォルトでは、サービスクライアントは設定された AWS リージョンを使用して、ターゲットリージョンのサービスエンドポイントを解決します。アプリケーションでカスタムエンドポイントが必要な場合は、aws.Config 構造体の EndpointResolverV2 フィールドにカスタム動作を指定できます。アプリケーションでカスタムの endpoints.Resolver を実装している場合は、サービスごとの新しいインターフェイスに適合するように移行する必要があります。

エンドポイント、およびカスタムリゾルバーの実装の詳細については、「クライアントエンドポイントを設定する」を参照してください。

認証

AWS SDK for Go は、より高度な認証動作をサポートしているため、codecatalyst や S3 Express One Zone などの新しい AWS サービス機能を使用できます。さらに、この動作はクライアントごとにカスタマイズできます。

API オペレーションの呼び出し

サービスクライアントのオペレーションメソッドの数は大幅に削減されました。<OperationName>Request、<OperationName>WithContext、および <OperationName> メソッドはすべて 1 つのオペレーションメソッド <OperationName> に統合されました。

例

次の例は、Amazon S3 PutObject オペレーションへの呼び出しを AWS SDK for Go v1 から v2 に移行する方法を示しています。

```
// V1

import "context"
import "github.com/aws/aws-sdk-go/service/s3"

// ...

client := s3.New(sess)

// Pattern 1
output, err := client.PutObject(&s3.PutObjectInput{
    // input parameters
})

// Pattern 2
output, err := client.PutObjectWithContext(context.TODO(), &s3.PutObjectInput{
    // input parameters
})

// Pattern 3
req, output := client.PutObjectRequest(context.TODO(), &s3.PutObjectInput{
    // input parameters
})
err := req.Send()
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/service/s3"
```

```
// ...

client := s3.NewFromConfig(cfg)

output, err := client.PutObject(context.TODO(), &s3.PutObjectInput{
    // input parameters
})
```

サービスデータ型

オペレーションのトップレベルの入力および出力型は、サービスクライアントパッケージにあります。特定のオペレーションの入力および出力型は、<OperationName>Input および <OperationName>Output というパターンに従います。ここで、OperationName は呼び出そうとしているオペレーションの名前です。例えば、Amazon S3 の PutObject オペレーションの入力および出力型はそれぞれ PutObjectInput および PutObjectOutput です。

入力および出力型以外のすべてのサービスデータ型は、サービスクライアントパッケージのインポートパス階層下にある types パッケージに移行されました。例えば、s3.AccessControlPolicy 型は現在、types.AccessControlPolicy にあります。

列挙値

SDK では、すべての API の列挙型フィールドに対して、型付きで扱えるようになりました。サービス API リファレンスドキュメントからコピーした文字列リテラル値を使用する代わりに、サービスクライアントの types パッケージにある具象型を使用できます。例えば、Amazon S3 の PutObjectInput オペレーションに対して、オブジェクトに適用する ACL を指定できます。 AWS SDK for Go v1 では、このパラメータは *string型でした。 AWS SDK for Goでは、このパラメータは types.ObjectCannedACL 型になりました。types パッケージには、このフィールドに指定できる有効な列挙値に対応する定数が自動生成されています。例えば、types.ObjectCannedACLPrivate は「private」という既定の ACL 値に対応する定数です。この値を使用すれば、アプリケーション内で文字列定数を管理する必要がなくなります。

ポインタパラメータ

AWS SDK for Go v1 では、すべての入力パラメータに対してサービスオペレーションに渡されるポインタリファレンスが必要でした。 AWS SDK for Go v2 では、入力値をポインタとして渡す必要がなくなるため、ほとんどの サービスのエクスペリエンスが簡素化されました。この変更により、多くのサービスクライアントオペレーションで uint8、uint16、uint32、int8、int16、int32、float32、float64、bool の各型に対する

ポインタ参照を渡す必要がなくなりました。同様に、スライスとマップの要素型も、要素をポインタ参照として渡す必要があるかどうかに応じて更新されました。

aws パッケージには、Go の組み込み型に対応するポインタを生成するためのヘルパー関数が用意されています。これらのヘルパーを使用することで、これらの型のポインタ型の取り扱いがより簡単になります。同様に、これらの型に対応するポインタの参照外しを安全に行うためのヘルパーメソッドも用意されています。例えば、aws.String 関数は `string ⇒ *string` の変換を行います。逆に、aws.ToString は `*string ⇒ string` の変換を行います。アプリケーションを AWS SDK for Go v1 から v2 にアップグレードする際は、ポインタ型から非ポインタ型への変換に使用していたヘルパーを移行する必要があります。例えば、aws.StringValue は `aws.ToString` に更新する必要があります。

エラー型

AWS SDK for Go は、Go 1.13 で導入されたエラーラッピング機能を最大限に活用します。エラーレスポンスをモデル化しているサービスでは、クライアントの `types` パッケージに、対応するエラー型が自動生成されています。これらの型を使用することで、クライアントオペレーションのエラーがそれらの型のいずれかによるものかを判定できます。Amazon S3 の `GetObject` オペレーションでは、存在しないオブジェクトキーを取得しようとすると、`NoSuchKey` エラーが返される可能性があります。errors.As を使用して、このようなエラーが types.NoSuchKey かどうかを判定できます。サービス側で特定のエラー型がモデル化されていない場合は、smithy.APIError インターフェイス型を利用して、サービスから返されたエラーのコードやメッセージを調べることができます。この機能は、awserr.Error および v1 の他の awserr AWS SDK for Go 機能を置き換えます。エラー処理の詳細については、「AWS SDK for Go V2 でのエラー処理」を参照してください。

例

```
// V1

import "github.com/aws/aws-sdk-go/aws/awserr"
import "github.com/aws/aws-sdk-go/service/s3"

// ...

client := s3.New(sess)

output, err := s3.GetObject(&s3.GetObjectInput{
    // input parameters
})
if err != nil {
```

```
    if awsErr, ok := err.(awserr.Error); ok {
        if awsErr.Code() == "NoSuchKey" {
            // handle NoSuchKey
        } else {
            // handle other codes
        }
        return
    }
    // handle a error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/service/s3"
import "github.com/aws/aws-sdk-go-v2/service/s3/types"
import "github.com/aws/smithy-go"

// ...

client := s3.NewFromConfig(cfg)

output, err := client.GetObject(context.TODO(), &s3.GetObjectInput{
    // input parameters
})
if err != nil {
    var nsk *types.NoSuchKey
    if errors.As(err, &nsk) {
        // handle NoSuchKey error
        return
    }
    var apiErr smithy.APIError
    if errors.As(err, &apiErr) {
        code := apiErr.ErrorCode()
        message := apiErr.ErrorMessage()
        // handle error code
        return
    }
    // handle error
    return
}
```

ページネーター

サービスオペレーションページネーターは、サービスクライアントのメソッドとして呼び出されなくなりました。オペレーションにページネーターを使用するには、対応するページネーターコンストラクタメソッドを使用してインスタンスを作成する必要があります。例えば、Amazon S3 の `ListObjectsV2` オペレーションをページ分割するには、s3.NewListObjectsV2Paginator を使用してページネーターを作成する必要があります。このコンストラクタは ListObjectsV2Paginator を返します。このページネーターには、取得するページがまだあるかどうかを判定する `HasMorePages` メソッド、次のページを取得するオペレーションを呼び出す `NextPage` メソッドが用意されています。SDK ページネーターの使用の詳細については、「オペレーションページネーターの使用」を参照してください。

v1 ページネーターから AWS SDK for Go v2 AWS SDK for Go 同等のページネーターに移行する方法の例を見てみましょう。

例

```
// V1

import "fmt"
import "github.com/aws/aws-sdk-go/service/s3"

// ...

client := s3.New(sess)

params := &s3.ListObjectsV2Input{
    // input parameters
}

totalObjects := 0
err := client.ListObjectsV2Pages(params, func(output *s3.ListObjectsV2Output, lastPage
 bool) bool {
    totalObjects += len(output.Contents)
    return !lastPage
})
if err != nil {
    // handle error
}
fmt.Println("total objects:", totalObjects)
```

```
// V2

import "context"
import "fmt"
import "github.com/aws/aws-sdk-go-v2/service/s3"

// ...

client := s3.NewFromConfig(cfg)

params := &s3.ListObjectsV2Input{
    // input parameters
}

totalObjects := 0
paginator := s3.NewListObjectsV2Paginator(client, params)
for paginator.HasMorePages() {
    output, err := paginator.NextPage(context.TODO())
    if err != nil {
        // handle error
    }
    totalObjects += len(output.Contents)
}
fmt.Println("total objects:", totalObjects)
```

ウェーター

サービスオペレーションのウェーターは、サービスクライアントのメソッドとして呼び出されなくなりました。ウェーターを使用するには、まず必要なウェーター型を作成し、次に wait メソッドを呼び出します。例えば、Amazon S3 のバケットが存在するまで待機するには、`BucketExists` ウェーターを作成する必要があります。s3.NewBucketExistsWaiter コンストラクタを使用して s3.BucketExistsWaiter を作成します。`s3.BucketExistsWaiter` には、バケットが使用可能になるまで待機するための `Wait` メソッドが用意されています。

事前署名リクエスト

V1 SDK は技術的に SDK オペレーションの AWS 事前署名をサポートしていましたが、これはサービスレベルで実際にサポートされている内容を正確に表していません (実際には、ほとんどの AWS サービスオペレーションは事前署名をサポートしていません) 。

AWS SDK for Go は、サポートされている事前署名可能なオペレーションの特定の APIs を使用してサービスパッケージ内の特定のPresignClient実装を公開することで、これを解決します。

注: SDK v1 で事前署名できていたオペレーションのうち、SDK v2 で事前署名できなくなっているオペレーションがあれば、GitHub に issue を投稿してお知らせください。

Presign や PresignRequest の使用箇所は、サービス専用の署名クライアントに置き換える必要があります。

次の例では、S3 GetObject リクエストの事前署名を移行する方法を示しています。

```
// V1

import (
    "fmt"
    "time"

    "github.com/aws/aws-sdk-go/aws"
    "github.com/aws/aws-sdk-go/aws/session"
    "github.com/aws/aws-sdk-go/service/s3"
)

func main() {
    sess := session.Must(session.NewSessionWithOptions(session.Options{
        SharedConfigState: session.SharedConfigEnable,
    }))

    svc := s3.New(sess)
    req, _ := svc.GetObjectRequest(&s3.GetObjectInput{
        Bucket: aws.String("amzn-s3-demo-bucket"),
        Key:    aws.String("key"),
    })

    // pattern 1
    url1, err := req.Presign(20 * time.Minute)
    if err != nil {
        panic(err)
    }
    fmt.Println(url1)

    // pattern 2
    url2, header, err := req.PresignRequest(20 * time.Minute)
    if err != nil {
```

```
        panic(err)
    }
    fmt.Println(url2, header)
}
```

```
// V2

import (
    "context"
    "fmt"
    "time"

    "github.com/aws/aws-sdk-go-v2/aws"
    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/s3"
)

func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        panic(err)
    }

    svc := s3.NewPresignClient(s3.NewFromConfig(cfg))
    req, err := svc.PresignGetObject(context.Background(), &s3.GetObjectInput{
        Bucket: aws.String("amzn-s3-demo-bucket"),
        Key:    aws.String("key"),
    }, func(o *s3.PresignOptions) {
        o.Expires = 20 * time.Minute
    })
    if err != nil {
        panic(err)
    }

    fmt.Println(req.Method, req.URL, req.SignedHeader)
}
```

リクエストのカスタマイズ

モノリシックだった request.Request API が機能ごとに再分割されました。

オペレーションの入力/出力

オペレーションの入力および出力構造体をそれぞれ保持する不透明な Request フィールド Params と Data は、特定のミドルウェアフェーズ内で入力/出力としてアクセスできるようになりました。

Request.Params と Request.Data を参照するリクエストハンドラーはミドルウェアに移行する必要があります。

Params の移行

```
// V1

import (
    "github.com/aws/aws-sdk-go/aws"
    "github.com/aws/aws-sdk-go/aws/request"
    "github.com/aws/aws-sdk-go/aws/session"
    "github.com/aws/aws-sdk-go/service/s3"
)

func withPutObjectDefaultACL(acl string) request.Option {
    return func(r *request.Request) {
        in, ok := r.Params.(*s3.PutObjectInput)
        if !ok {
            return
        }

        if in.ACL == nil {
            in.ACL = aws.String(acl)
        }
        r.Params = in
    }
}

func main() {
    sess := session.Must(session.NewSession())

 sess.Handlers.Validate.PushBack(withPutObjectDefaultACL(s3.ObjectCannedACLBucketOwnerFullContr

    // ...
}
```

```
// V2
```

```
import (
    "context"

    "github.com/aws/aws-sdk-go-v2/service/s3"
    "github.com/aws/aws-sdk-go-v2/service/s3/types"
    "github.com/aws/smithy-go/middleware"
    smithyhttp "github.com/aws/smithy-go/transport/http"
)

type withPutObjectDefaultACL struct {
    acl types.ObjectCannedACL
}

// implements middleware.InitializeMiddleware, which runs BEFORE a request has
// been serialized and can act on the operation input
var _ middleware.InitializeMiddleware = (*withPutObjectDefaultACL)(nil)

func (*withPutObjectDefaultACL) ID() string {
    return "withPutObjectDefaultACL"
}

func (m *withPutObjectDefaultACL) HandleInitialize(ctx context.Context, in
 middleware.InitializeInput, next middleware.InitializeHandler) (
    out middleware.InitializeOutput, metadata middleware.Metadata, err error,
) {
    input, ok := in.Parameters.(*s3.PutObjectInput)
    if !ok {
        return next.HandleInitialize(ctx, in)
    }

    if len(input.ACL) == 0 {
        input.ACL = m.acl
    }
    in.Parameters = input
    return next.HandleInitialize(ctx, in)
}

// create a helper function to simplify instrumentation of our middleware
func WithPutObjectDefaultACL(acl types.ObjectCannedACL) func (*s3.Options) {
    return func(o *s3.Options) {
        o.APIOptions = append(o.APIOptions, func (s *middleware.Stack) error {
            return s.Initialize.Add(&withPutObjectDefaultACL{acl: acl},
 middleware.After)
```

```
        })
    }
}

func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        // ...
    }

    svc := s3.NewFromConfig(cfg,
 WithPutObjectDefaultACL(types.ObjectCannedACLBucketOwnerFullControl))
    // ...
}
```

Data の移行

```
// V1

import (
    "github.com/aws/aws-sdk-go/aws"
    "github.com/aws/aws-sdk-go/aws/request"
    "github.com/aws/aws-sdk-go/aws/session"
    "github.com/aws/aws-sdk-go/service/s3"
)

func readPutObjectOutput(r *request.Request) {
        output, ok := r.Data.(*s3.PutObjectOutput)
        if !ok {
            return
        }

        // ...
    }
}

func main() {
    sess := session.Must(session.NewSession())
    sess.Handlers.Unmarshal.PushBack(readPutObjectOutput)

    svc := s3.New(sess)
    // ...
}
```

```
// V2

import (
    "context"

    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/s3"
    "github.com/aws/smithy-go/middleware"
    smithyhttp "github.com/aws/smithy-go/transport/http"
)

type readPutObjectOutput struct{}

var _ middleware.DeserializeMiddleware = (*readPutObjectOutput)(nil)

func (*readPutObjectOutput) ID() string {
    return "readPutObjectOutput"
}

func (*readPutObjectOutput) HandleDeserialize(ctx context.Context, in
 middleware.DeserializeInput, next middleware.DeserializeHandler) (
    out middleware.DeserializeOutput, metadata middleware.Metadata, err error,
) {
    out, metadata, err = next.HandleDeserialize(ctx, in)
    if err != nil {
        // ...
    }

    output, ok := in.Parameters.(*s3.PutObjectOutput)
    if !ok {
        return out, metadata, err
    }

    // inspect output...

    return out, metadata, err
}

func WithReadPutObjectOutput(o *s3.Options) {
    o.APIOptions = append(o.APIOptions, func (s *middleware.Stack) error {
        return s.Initialize.Add(&withReadPutObjectOutput{}, middleware.Before)
    })
}
```

```
func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        // ...
    }

    svc := s3.NewFromConfig(cfg, WithReadPutObjectOutput)
    // ...
}
```

HTTP リクエスト/レスポンス

Request の HTTPRequest および HTTPResponse フィールドは特定のミドルウェアフェーズで公開されるようになりました。ミドルウェアはトランスポートに依存しないため、基となる HTTP リクエストまたはレスポンスを明らかにするには、ミドルウェアの入力または出力に対して型アサーションを行う必要があります。

Request.HTTPRequest と Request.HTTPResponse を参照するリクエストハンドラーはミドルウェアに移行する必要があります。

HTTPRequest の移行

```
// V1

import (
    "github.com/aws/aws-sdk-go/aws/request"
    "github.com/aws/aws-sdk-go/aws/session"
)

func withHeader(header, val string) request.Option {
    return func(r *request.Request) {
        request.HTTPRequest.Header.Set(header, val)
    }
}

func main() {
    sess := session.Must(session.NewSession())
    sess.Handlers.Build.PushBack(withHeader("x-user-header", "..."))

    svc := s3.New(sess)
    // ...
```

```
}
```

```
// V2

import (
    "context"
    "fmt"

    "github.com/aws/aws-sdk-go-v2/config"
    "github.com/aws/aws-sdk-go-v2/service/s3"
    "github.com/aws/smithy-go/middleware"
    smithyhttp "github.com/aws/smithy-go/transport/http"
)

type withHeader struct {
    header, val string
}

// implements middleware.BuildMiddleware, which runs AFTER a request has been
// serialized and can operate on the transport request
var _ middleware.BuildMiddleware = (*withHeader)(nil)

func (*withHeader) ID() string {
    return "withHeader"
}

func (m *withHeader) HandleBuild(ctx context.Context, in middleware.BuildInput, next
 middleware.BuildHandler) (
    out middleware.BuildOutput, metadata middleware.Metadata, err error,
) {
    req, ok := in.Request.(*smithyhttp.Request)
    if !ok {
        return out, metadata, fmt.Errorf("unrecognized transport type %T", in.Request)
    }

    req.Header.Set(m.header, m.val)
    return next.HandleBuild(ctx, in)
}

func WithHeader(header, val string) func (*s3.Options) {
    return func(o *s3.Options) {
        o.APIOptions = append(o.APIOptions, func (s *middleware.Stack) error {
            return s.Build.Add(&withHeader{
```

```
                header: header,
                val: val,
            }, middleware.After)
        })
    }
}

func main() {
    cfg, err := config.LoadDefaultConfig(context.Background())
    if err != nil {
        // ...
    }

    svc := s3.NewFromConfig(cfg, WithHeader("x-user-header", "..."))
    // ...
}
```

ハンドラーフェーズ

SDK v2 のミドルウェアフェーズは v1 のハンドラーフェーズの後継にあたります。

次の表では、v1 ハンドラーフェーズと、V2 ミドルウェアスタック内の同等の場所との大まかな対応関係を示しています。

v1 ハンドラー名	v2 ミドルウェアフェーズ
検証	Initialize
構築	Serialize
Sign	Finalize
送信	該当なし (1)
ValidateResponse	Deserialize
Unmarshal	Deserialize
UnmarshalMetadata	Deserialize
UnmarshalError	Deserialize

v1 ハンドラー名	v2 ミドルウェアフェーズ
再試行	Finalize ("Retry" ミドルウェアの後) (2)
AfterRetry	Finalize ("Retry" ミドルウェアの前、`next.HandleFinalize()` の後) (2、3)
CompleteAttempt	Finalize (ステップの末尾)
完了	Initialize (ステップの先頭、`next.HandleInitialize()` の後) (3)

(1) v1 での Send フェーズは実質的に、v2 ではラップされた HTTP クライアントのラウンドトリップに相当します。この動作はクライアントオプションの `HTTPClient` フィールドによって制御されます。

(2) Finalize ステップの "Retry" ミドルウェア以降のすべてのミドルウェアは、再試行ループの一部となります。

(3) 実行時のミドルウェア「スタック」は、繰り返し修飾されるハンドラー関数に組み込まれます。各ハンドラーには、チェーン内の次のハンドラーを呼び出す責任があります。これは暗黙的に、ミドルウェアステップが「次のステップ」を呼び出した後にもアクションを実行できることを意味します。

例えば、スタックのトップレベルにある Initialize ステップでは、「次のハンドラーを呼び出した後に動作する」Initialize ミドルウェアは、実質的にリクエストの末尾で動作することになります。

```
// V2

import (
    "context"

    "github.com/aws/smithy-go/middleware"
)

type onComplete struct{}

var _ middleware.InitializeMiddleware = (*onComplete)(nil)

func (*onComplete) ID() string {
```

```
    return "onComplete"
}

func (*onComplete) HandleInitialize(ctx context.Context, in middleware.InitializeInput,
 next middleware.InitializeHandler) (
    out middleware.InitializeOutput, metadata middleware.Metadata, err error,
) {
    out, metadata, err = next.HandleInitialize(ctx, in)

    // the entire operation was invoked above - the deserialized response is
    // available opaquely in out.Result, run post-op actions here...

    return out, metadata, err
}
```

機能

Amazon EC2 インスタンスメタデータサービス

AWS SDK for Go には、Amazon EC2 インスタンスでアプリケーションを実行するときにローカル IMDS をクエリするために使用できる Amazon EC2 インスタンスメタデータサービス (IMDS) クライアントが用意されています。IMDS クライアントは、アプリケーションに追加できる個別の Go モジュールです。

```
go get github.com/aws/aws-sdk-go-v2/feature/ec2/imds
```

クライアントのコンストラクタとメソッドオペレーションは、他の SDK サービスクライアントの設計に合わせて更新されました。

例

```
// V1

import "github.com/aws/aws-sdk-go/aws/ec2metadata"

// ...

client := ec2metadata.New(sess)

region, err := client.Region()
```

```
if err != nil {
    // handle error
}
```

```
// V2

import "context"
import "github.com/aws/aws-sdk-go-v2/feature/ec2/imds"

// ...

client := imds.NewFromConfig(cfg)

region, err := client.GetRegion(context.TODO())
if err != nil {
    // handle error
}
```

Amazon S3 Transfer Manager

Amazon S3 Transfer Manager は、オブジェクトのアップロードとダウンロードを同時に管理するために使用できます。このパッケージは、サービスクライアントのインポートパス外にある Go モジュール内にあります。このモジュールは `go get github.com/aws/aws-sdk-go-v2/feature/s3/manager` を使用して取得できます。

s3.NewUploader と s3.NewUploaderWithClient は、アップロードマネージャークライアントを作成するためのコンストラクタメソッド manager.NewUploader に置き換えられました。

s3.NewDownloader と s3.NewDownloaderWithClient は、ダウンロードマネージャークライアントを作成するためのコンストラクタメソッド manager.NewDownloader に置き換えられました。

Amazon CloudFront 署名ユーティリティ

AWS SDK for Go は、サービスクライアントのインポートパス外の Go モジュールに Amazon CloudFront 署名ユーティリティを提供します。このモジュールは `go get` を使用して取得できます。

```
go get github.com/aws/aws-sdk-go-v2/feature/cloudfront/sign
```

Amazon S3 暗号化クライアント

以降 AWS SDK for Go、Amazon S3 暗号化クライアントは AWS Crypto Tools の別のモジュールです。Go 用の S3 暗号化クライアントの最新バージョン 3.x が GitHub で公開されています。このモジュールは go get を使用して取得できます。

```
go get github.com/aws/amazon-s3-encryption-client-go/v3
```

従来の EncryptionClient (v1、v2) と DecryptionClient (v1、v2) の各 API は、暗号化と復号の両機能を公開する 1 つのクライアント S3EncryptionClientV3 に統合されました。

の他のサービスクライアントと同様に AWS SDK for Go、オペレーション APIsは要約されています。

- GetObject、GetObjectRequest、および GetObjectWithContext 復号 API は GetObject に置き換えられました。
- PutObject、PutObjectRequest、および PutObjectWithContext 暗号化 API は PutObject に置き換えられました。

暗号化クライアントのメジャーバージョン 3.x への移行方法については、このガイドを参照してください。

サービスカスタマイズの変更点

Amazon S3

v1 から AWS SDK for Go v2 に移行する場合、注意すべき重要な変更には、お客様が用意したキーによるサーバー側の暗号化 (SSE-C) SSECustomerKeyに使用される の処理が含まれます。 AWS SDK for Go v1 では、 の Base64 SSECustomerKeyへのエンコードは SDK によって内部的に処理されました。SDK v2 ではこの自動エンコード機能は廃止され、SDK に渡す前に手動で SSECustomerKey を Base64 エンコードする必要があります。

調整例:

```
// V1

import (
  "context"
```

```
  "encoding/base64"
  "github.com/aws/aws-sdk-go-v2/config"
  "github.com/aws/aws-sdk-go-v2/service/s3"
)
// ... more code

plainTextKey := "12345678901234567890123456789012" // 32 bytes in length

// calculate md5..

_, err = client.PutObjectWithContext(context.Background(), &s3.PutObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("your-object-key"),
    Body:                 strings.NewReader("hello-world"),
    SSECustomerKey:       &plainTextKey,
    SSECustomerKeyMD5:    &base64Md5,
    SSECustomerAlgorithm: aws.String("AES256"),
})

// ... more code
```

```
// V2

import (
  "github.com/aws/aws-sdk-go/aws"
  "github.com/aws/aws-sdk-go/aws/session"
  "github.com/aws/aws-sdk-go/service/s3"
)

// ... more code

plainTextKey := "12345678901234567890123456789012" // 32 bytes in length
base64EncodedKey := base64.StdEncoding.EncodeToString([]byte(plainTextKey))

// calculate md5..

_, err = client.PutObject(context.Background(), &s3.PutObjectInput{
    Bucket: aws.String("amzn-s3-demo-bucket"),
    Key:    aws.String("your-object-key"),
    Body:                 strings.NewReader("hello-world"),
    SSECustomerKey:       &base64EncodedKey,
    SSECustomerKeyMD5:    &base64Md5,
    SSECustomerAlgorithm: aws.String("AES256"),
```

```
})

// ... more code
```

のセキュリティ AWS SDK for Go

のクラウドセキュリティが最優先事項 AWS です。お客様は AWS 、セキュリティを最も重視する組織の要件を満たすように構築されたデータセンターとネットワークアーキテクチャを活用できます。

セキュリティは、 AWS お客様とお客様の間の責任共有です。責任共有モデルではこれをクラウドのセキュリティおよびクラウド内のセキュリティと説明しています。

- クラウドのセキュリティ – AWS は、 で AWS サービスを実行するインフラストラクチャを保護する責任を担います AWS クラウド。 は、お客様が安全に使用できるサービス AWS も提供します。サードパーティーの監査者は、AWS コンプライアンスプログラムコンプライアンスプログラムの一環として、当社のセキュリティの有効性を定期的にテストおよび検証。が適用されるコンプライアンスプログラムの詳細については AWS SDK for Go、「コンプライアンスプログラムAWS による対象範囲内のサービスコンプライアンスプログラム」を参照してください。
- クラウドのセキュリティ – お客様の責任は、使用する AWS サービスによって決まります。また、ユーザーは、データの機密性、会社の要件、適用される法律や規制など、その他の要因についても責任を負います。

このドキュメントは、 を使用する際の責任共有モデルの適用方法を理解するのに役立ちます AWS SDK for Go。以下のトピックでは、セキュリティおよびコンプライアンスの目的を達成する AWS SDK for Go ように を設定する方法について説明します。また、 AWS SDK for Go リソースのモニタリングや保護に役立つ他の AWS サービスの使用方法についても説明します。

トピック

- でのデータ保護 AWS SDK for Go
- のコンプライアンス検証 AWS SDK for Go
- AWS SDK for Go での耐障害性
- 最小 TLS バージョンの適用

でのデータ保護 AWS SDK for Go

AWS 責任共有モデル は、 AWS SDK for Goでのデータ保護に適用されます。このモデルで説明されているように、 AWS はすべての を実行するグローバルインフラストラクチャを保護する責任があります AWS クラウド。ユーザーは、このインフラストラクチャでホストされるコンテンツに対する管理を維持する責任があります。また、使用する「 AWS のサービス 」のセキュリティ設定と

管理タスクもユーザーの責任となります。データプライバシーの詳細については、「Data Privacy FAQChina」を参照してください。 欧州におけるデータ保護に関する情報については、General Data Protection Regulation (GDPR) Center を参照してください。

データ保護の目的で、認証情報を保護し AWS アカウント 、 AWS IAM アイデンティティセンターまたは AWS Identity and Access Management (IAM) を使用して個々のユーザーを設定することをお勧めします。この方法により、それぞれのジョブを遂行するために必要な権限のみが各ユーザーに付与されます。また、次の方法でデータを保護することもお勧めします:

- 各アカウントで多要素認証 (MFA) を使用します。
- SSL/TLS を使用して AWS リソースと通信します。TLS 1.2 は必須ですが、TLS 1.3 を推奨します。
- で API とユーザーアクティビティのログ記録を設定します AWS CloudTrail。CloudTrail 証跡を使用して AWS アクティビティをキャプチャする方法については、「 AWS CloudTrail ユーザーガイド」のCloudTrail 証跡の使用」を参照してください。
- AWS 暗号化ソリューションと、 内のすべてのデフォルトのセキュリティコントロールを使用します AWS のサービス。
- Amazon Macie などの高度な管理されたセキュリティサービスを使用します。これらは、Amazon S3 に保存されている機密データの検出と保護を支援します。
- コマンドラインインターフェイスまたは API AWS を介して にアクセスするときに FIPS 140-3 検証済み暗号化モジュールが必要な場合は、FIPS エンドポイントを使用します。利用可能な FIPS エンドポイントの詳細については、「連邦情報処理規格 (FIPS) 140-3」を参照してください。

お客様の E メールアドレスなどの極秘または機密情報を、タグ、または [名前] フィールドなどの自由形式のテキストフィールドに含めないことを強くお勧めします。これは、コンソール AWS SDK for Go 、API、または SDK を使用して AWS CLIまたは他の AWS のサービス を操作する場合も同様です。 AWS SDKs タグ、または名前に使用される自由記述のテキストフィールドに入力したデータは、請求または診断ログに使用される場合があります。外部サーバーに URL を提供する場合、そのサーバーへのリクエストを検証できるように、認証情報を URL に含めないことを強くお勧めします。

のコンプライアンス検証 AWS SDK for Go

新しい AWS サインアップエクスペリエンスは、規制されたワークロード向けには設計されていません。新しい AWS サインアップエクスペリエンスを使用しているが、規制対象のワークロード AWS

に を使用する場合は、 AWS (アドバンスド) にサインアップするか、 AWS 環境の高度な機能をアクティブ化できます。

AWS のサービス が特定のコンプライアンスプログラムの範囲内にあるかどうかを確認するには、「コンプライアンスAWS のサービス プログラムによるスコープ」の「コンプライアンス」を参照して、関心のあるコンプライアンスプログラムを選択します。一般的な情報については、AWS 「コンプライアンスプログラム」を参照してください。

を使用して、サードパーティーの監査レポートをダウンロードできます AWS Artifact。詳細については、「Downloading Reports in AWS Artifact」を参照してください。

を使用する際のお客様のコンプライアンス責任 AWS のサービス は、お客様のデータの機密性、貴社のコンプライアンス目的、適用可能な法律および規制によって決まります。を使用する際のコンプライアンス責任の詳細については AWS のサービス、AWS 「 セキュリティドキュメント」を参照してください。

AWS SDK for Go での耐障害性

AWS グローバルインフラストラクチャは AWS リージョン およびアベイラビリティーゾーンを中心に構築されています。AWS リージョン は、低レイテンシー、高スループット、そして高度な冗長ネットワークで接続される物理的に独立、隔離された複数のアベイラビリティーゾーンを提供します。アベイラビリティーゾーンを使用すると、中断することなくゾーン間で自動的にフェイルオーバーするアプリケーションとデータベースを設計および運用できます。アベイラビリティーゾーンは、従来の単一または複数のデータセンターインフラストラクチャよりも可用性が高く、フォールトトレラントで、スケーラブルです。

AWS リージョン とアベイラビリティーゾーンの詳細については、「AWS グローバルインフラストラクチャ」を参照してください。

最小 TLS バージョンの適用

AWS サービスと通信する際のセキュリティを強化するには、TLS 1.2 以降を使用するようにクライアントを設定する必要があります。サービスを使用するには AWS 、基盤となる Go ランタイムが TLS 1.2 の最小バージョンをサポートしている必要がありますが、TLS 1.3 が推奨されます。

TLS 1.3 は、量子後暗号化を有効にするための前提条件であり、追加のアクションや設定が必要になる場合があります。詳細については、「SDK およびツールリファレンスガイド」の「ハイブリッドポスト量子 TLS の有効化」を参照してください。 AWS SDKs

> **Note**
>
> Go ウェブサイトの Go 1.18 以降、net/httpデフォルトで使用されている TLS 設定は最低 TLS 1.2 に設定され、TLS 1.0 および TLS 1.1 のサポートが無効になっています。

TLS バージョンの設定

AWS SDK for Go v2 では、トランスポートが tls.Config を指定するカスタム HTTP クライアントを指定して最小 TLS バージョンを設定します。これは Go パッケージのドキュメントウェブサイトに記載されています。HTTP クライアントのカスタマイズの詳細については、「」を参照してくださいHTTP クライアントをカスタマイズする。

次の例では、TLS 1.2 以上を必要とする HTTP クライアントを構築し、 に渡しますconfig.LoadDefaultConfig。

```
import (
    "context"
    "crypto/tls"
    "log"
    "net/http"

    awshttp "github.com/aws/aws-sdk-go-v2/aws/transport/http"
    "github.com/aws/aws-sdk-go-v2/config"
)

// ...

httpClient := awshttp.NewBuildableClient().WithTransportOptions(func(tr
 *http.Transport) {
    tr.TLSClientConfig = &tls.Config{
        MinVersion: tls.VersionTLS12,
    }
})

cfg, err := config.LoadDefaultConfig(context.TODO(), config.WithHTTPClient(httpClient))
if err != nil {
    log.Fatalf("failed to load configuration, %v", err)
}
```

TLS 1.3 を要求するには、 MinVersionを に設定しますtls.VersionTLS13。

> **Note**
>
> 一部の AWS サービスはまだ TLS 1.3 をサポートしていません。TLS 1.3 を最小バージョンとして設定すると、相互運用性に影響する可能性があります。本番環境にデプロイする前に、各サービスでこの変更をテストすることをお勧めします。

AWS SDK for Go v2 デベロッパーガイドのドキュメント履歴

次の表は、AWS SDK for Go v2 のドキュメントリリースの内容をまとめたものです。

変更	説明	日付
HTTP インターセプター	HTTP インターセプター、ミドルウェアに対する利点、使用可能なフック、登録方法について説明する新しいセクション。	2025 年 9 月 4 日
チェックサムによるデータ整合性保護	自動チェックサム計算に関する詳細情報で更新されたコンテンツ。	2025 年 1 月 16 日
初回リリース	AWS SDK for Go v2 デベロッパーガイドの初回リリース	2024 年 10 月 31 日

翻訳は機械翻訳により提供されています。提供された翻訳内容と英語版の間で齟齬、不一致または矛盾がある場合、英語版が優先します。