

User Guide

AWS Compute Optimizer



Copyright © 2025 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

AWS Compute Optimizer: User Guide

Copyright © 2025 Amazon Web Services, Inc. and/or its affiliates. All rights reserved.

Amazon's trademarks and trade dress may not be used in connection with any product or service that is not Amazon's, in any manner that is likely to cause confusion among customers, or in any manner that disparages or discredits Amazon. All other trademarks not owned by Amazon are the property of their respective owners, who may or may not be affiliated with, connected to, or sponsored by Amazon.

Table of Contents

What is Compute Optimizer?	1
Supported resources	1
Opting in	2
Analyzing metrics	2
Enhancing recommendations	2
Viewing findings and recommendations	2
Availability	3
Supported resources	4
Supported Amazon EC2 instance types	5
Supported Amazon EC2 Auto Scaling groups	7
Rightsizing recommendations	7
Idle recommendations	8
Supported Amazon EBS volume types	8
Supported Amazon Aurora and RDS databases	8
Database engines	9
RDS DB instances	9
RDS DB instance storage	10
Aurora DB cluster storage	10
Additional resources	11
Resource requirements	12
Amazon EC2 instance and EC2 Auto Scaling group requirements	12
Amazon EBS volume requirements	13
Lambda function requirements	13
Requirements for Amazon ECS services on Fargate	14
Commercial software license requirements	14
Amazon Aurora and RDS database requirements	15
Amazon Aurora and RDS instances	15
Aurora DB clusters	15
Additional resources	16
Getting started	
Required permissions	
Accounts supported by Compute Optimizer	17
Next steps	18
Additional resources	18

Opting in to Compute Optimizer	19
Prerequisites	19
Procedure	19
Next steps	21
Additional resources	21
Opting out	22
Identity and Access Management	23
Trusted access for AWS Organizations	24
Policy to opt in to Compute Optimizer	25
Access for standalone accounts	26
Access for management accounts	27
Access to manage recommendation preferences	29
Enable license recommendations	31
Deny access	32
Additional resources	32
AWS managed policies	33
AWS managed policy: ComputeOptimizerServiceRolePolicy	33
AWS managed policy: ComputeOptimizerReadOnlyAccess	35
Policy updates	37
Using Service-Linked Roles	40
Service-linked role permissions for Compute Optimizer	41
Service-linked role permissions	42
Creating a Service-Linked Role for Compute Optimizer	43
Editing a Service-Linked Role for Compute Optimizer	43
Deleting a Service-Linked Role for Compute Optimizer	44
Supported Regions for Compute Optimizer service-linked Roles	44
Additional resources	44
letrics analyzed	45
EC2 instance metrics	
Metrics analyzed for EC2 instances	
Enabling memory utilization with the CloudWatch agent	48
Enabling NVIDIA GPU utilization with the CloudWatch agent	50
Configure external metrics ingestion	
EBS volume metrics	
Lambda function metrics	51
Metrics for Amazon ECS services on Fargate	52

	Metrics for commercial software licenses	52
	Aurora and RDS database metrics	53
Us	sing the dashboard	59
	Savings opportunity	59
	Performance improvement opportunity	60
	Optimization options per resource	61
	Viewing the dashboard	62
Vi	ewing resource recommendations	64
	EC2 instance recommendations	64
	Finding classifications	66
	Finding reasons	66
	AWS Graviton-based instance recommendations	71
	Inferred workload types	72
	Migration effort	72
	Platform differences	73
	Estimated monthly savings and savings opportunity	75
	Performance risk	76
	Utilization graphs	. 77
	Accessing EC2 instance recommendations	81
	EC2 Auto Scaling group recommendations	83
	How an EC2 Auto Scaling group recommendation is generated	85
	Finding classifications	86
	Allocation strategy	87
	Estimated monthly savings and savings opportunity	88
	Idle	89
	AWS Graviton-based instance recommendations	89
	Inferred workload types	89
	Migration effort	
	Performance risk	
	Utilization graphs	
	Accessing EC2 Auto Scaling group recommendations	92
	EBS volume recommendations	
	Finding classifications	95
	Estimated monthly savings and savings opportunity	96
	Performance risk	97
	Utilization graphs	98

Accessing EBS volumes recommendations	99
Lambda function recommendations	101
Finding classifications	102
Estimated monthly savings and savings opportunity	103
Current performance risk	105
Utilization graphs	105
Accessing Lambda function recommendations	106
ECS service recommendations	108
Finding classifications	109
Finding reasons	110
Estimated monthly savings and savings opportunity	111
Current performance risk	113
Compare current settings with recommended task size	113
Compare current settings with recommended container size	115
Utilization graphs	116
Accessing ECS service recommendations	117
Commercial software license recommendations	119
Finding classifications	120
Finding reasons	121
Estimated monthly savings and savings opportunity	122
Inferred workload types	123
Compare current license edition with recommended license edition	123
Utilization graphs	124
Accessing license recommendations	124
Aurora and RDS database recommendations	126
Finding classifications	128
Finding reasons	131
AWS Graviton-based instance recommendations	136
Estimated monthly savings and savings opportunity	136
Performance risk	138
Comparison graphs	138
Accessing Aurora and RDS recommendations	144
Idle resource recommendations	146
Idle criteria per resource	147
Estimated monthly savings	151
commendation preferences	153

	Rightsizing preferences	153
	Preferred EC2 instances	154
	Lookback period and metrics	154
	Next steps	159
	Setting rightsizing preferences	159
	Enhanced infrastructure metrics	164
	Required permissions	164
	Organization, account, and resource level	165
	Next steps	166
	Activating EIM at the resource level	166
	Activating EIM at the organization or account level	168
	External metrics ingestion	169
	Metric requirements	170
	Organization and account level	170
	Next steps	170
	Configuring external metrics ingestion	171
	Opting out of external metrics ingestion	173
	Inferred workload type	175
	Required permissions	175
	Organization and account level	175
	Next steps	176
	Activating inferred workload type	176
	Savings estimation mode	177
	Next steps	178
	Activating savings estimation mode	178
	AWS Graviton-based instance recommendations	180
	Additional resources	173
18	anaging accounts and preferences	181
	Viewing member account status	181
	Prerequisites	181
	Procedure	
	Additional resources	
	Delegating an administrator account	182
	Procedure	183
	Additional resources	185
x	porting recommendations	186

Specifying S3 bucket for recommendations export	186
Prerequisites	186
Procedure	. 186
Next steps	189
Additional resources	190
Using encrypted S3 buckets for exports	190
Exporting your recommendations	192
Prerequisites	192
Procedure	. 193
Next steps	195
Additional resources	195
Viewing your export jobs	195
Prerequisites	195
Procedure	. 196
Additional resources	196
Exported files	197
Recommendations file	197
Metadata file	282
Troubleshooting	286
Failed to create service-linked role	286
Failed to enable trusted access	286
Failed to get or update enhanced infrastructure metrics recommendation preferences	287
Troubleshooting failed export jobs	287
Security	289
Data protection	289
Compliance validation	290
Desument history	202

What is AWS Compute Optimizer?

AWS Compute Optimizer is a service that analyzes your AWS resources' configuration and utilization metrics to provide you with rightsizing recommendations and identify idle resources. It reports whether your resources are optimal, and generates optimization recommendations to reduce the cost and improve the performance of your workloads. Compute Optimizer also provides graphs showing recent utilization metric history data, as well as projected utilization for recommendations, which you can use to evaluate which recommendation provides the best price-performance trade-off. The analysis and visualization of your usage patterns can help you decide when to move or resize your running resources, stop or delete idle resources, and still meet your performance and capacity requirements.

Compute Optimizer provides a <u>console experience</u>, and a <u>set of APIs</u> that allows you to view the findings of the analysis and recommendations for your resources across multiple AWS Regions. You can also view findings and recommendations across multiple accounts, if you opt in the management account of an organization. The findings from the service are also reported in the consoles of the supported services, such as the Amazon EC2 console.

Supported resources

Compute Optimizer generates recommendations for the following resources:

- Amazon Elastic Compute Cloud (Amazon EC2) instances
- Amazon EC2 Auto Scaling groups
- Amazon Elastic Block Store (Amazon EBS) volumes
- AWS Lambda functions
- Amazon Elastic Container Service (Amazon ECS) services on AWS Fargate
- Commercial software licenses
- Amazon Aurora and Amazon Relational Database Service (Amazon RDS) databases

For Compute Optimizer to generate recommendations for these resources, they must meet a specific set of requirements, and must have accumulated sufficient metric data. For more information, see Resource requirements.

Supported resources

Opting in

You must opt in to have Compute Optimizer analyze your AWS resources. The service supports standalone AWS accounts, member accounts of an organization, and the management account of an organization. For more information, see Opting in to AWS Compute Optimizer.

Analyzing metrics

After you opt in, Compute Optimizer begins analyzing the specifications and the utilization metrics of your resources from Amazon CloudWatch for the last 14 days. For example, for Amazon EC2 instances, Compute Optimizer analyzes the vCPUs, memory, storage, and other specifications. It also analyzes the CPU utilization, network in and out, disk read and write, and other utilization metrics of currently running instances. For more information, see Metrics analyzed by AWS Compute Optimizer.

Enhancing recommendations

After you opt in, you can enhance your recommendations by activating recommendation preferences, such as the enhanced infrastructure metrics (paid feature). This feature extends the metrics analysis lookback period for selected resources to 93 days (compared to the 14-day default). For more information, see Enhanced infrastructure metrics.

You can also customize your recommendations using rightsizing recommendation preferences, which allow you to adjust CPU and memory utilization headroom and thresholds, configure specific lookback periods, and set instance family preferences at the organization, account, or regional level. For more information, see Rightsizing recommendation preferences.

Additionally, Compute Optimizer can ingest and analyze external EC2 memory utilization metrics from observability products like Datadog and Dynatrace to generate more accurate EC2 rightsizing recommendations. For more information, see External metrics ingestion.

Viewing findings and recommendations

Optimization findings for your resources are displayed on the Compute Optimizer dashboard. For more information, see Using the AWS Compute Optimizer dashboard.

The top optimization recommendations for each of your resources are listed on the recommendations page. The top 3 optimization recommendations and utilization graphs for

Opting in 2

a specific resource are listed on the resource details page. For more information, see <u>Viewing</u> resource recommendations.

Export your optimization recommendations to record them over time, and share the data with others. For more information, see Exporting AWS Compute Optimizer recommendations.

Availability

To view the currently supported AWS Regions and endpoints for Compute Optimizer, see <u>Compute</u> Optimizer Endpoints and Quotas in the *AWS General Reference*.

Availability 3

AWS resources supported by Compute Optimizer

This chapter outlines the AWS resources that Compute Optimizer generates recommendations for. It also provides you with the specific resource types supported by Compute Optimizer.

AWS Compute Optimizer generates recommendations for the following AWS resources:

Amazon Elastic Compute Cloud (Amazon EC2) instances

Compute Optimizer generates recommendations for many Amazon EC2 instance types. For more information about the specific instance types that Compute Optimizer supports, see Supported Amazon EC2 instance types.

Amazon EC2 Auto Scaling groups

Compute Optimizer generates recommendations for EC2 Auto Scaling groups. For more information, see Supported Amazon EC2 Auto Scaling groups.

Amazon Elastic Block Store (Amazon EBS) volumes

Compute Optimizer generates recommendations for various EBS volume types. For more information about the specific EBS volume types that Compute Optimizer supports, see Supported Amazon EBS volume types.

AWS Lambda functions

Compute Optimizer generates memory size recommendations for Lambda functions that meet specific requirements. For more information, see Lambda function requirements.

Amazon Elastic Container Service (Amazon ECS) services on AWS Fargate

Compute Optimizer generates recommendations for Amazon ECS services on Fargate that meet specific requirements. For more information, see <u>Requirements for Amazon ECS services on Fargate</u>.

Commercial software licenses

Compute Optimizer generates license recommendations for Microsoft SQL Servers on Amazon EC2 that meet specific requirements. For more information, see Commercial software license requirements.

Amazon Aurora and Amazon Relational Database Service (Amazon RDS) databases

Compute Optimizer generates Aurora and RDS DB instances, RDS DB instance storage, and Aurora DB cluster recommendations for RDS for MySQL, RDS for PostgreSQL, and Amazon Aurora databases. For more information about the specific Amazon RDS resources supported by Compute Optimizer, see Supported Amazon Aurora and RDS databases.



Note

In order to generate recommendations for each resource, the resources must meet Compute Optimizer's metric and resource-specific requirements. For a list of the requirements for each resource, see Resource requirements.

Topics

- Supported Amazon EC2 instance types
- Supported Amazon EC2 Auto Scaling groups
- Supported Amazon EBS volume types
- Supported Amazon Aurora and RDS databases
- Additional resources

Supported Amazon EC2 instance types

Compute Optimizer generates recommendations for the instance types listed in this section. The following table lists the EC2 instance types that are supported by Compute Optimizer.

Instance series	Instance family
C – Compute optimized	C1 C3 C4 C5 C5a C5ad C5d C5n C6a C6g C6gd C6gn C6i C6in C6id C7a C7g C7gd C7gn C7i C7i-flex C8g
D – Dense storage	D2 D3 D3en
G – Graphics intensive	G4dn G5g G5 G6 Gr6 G6e

Instance series	Instance family
Hpc – High performance computing	H1 Hpc6a Hpc6id Hpc7a Hpc7g
I – Storage optimized	I2 I3 I3en I4g I4i I7ie I8g Im4gn Is4gen
M – General purpose	M1 M2 M3 M4 M5 M5a M5ad M5d M5dn M5n M5zn M6a M6g M6gd M6i M6id M6idn M6in M7a M7g M7gd M7i M7i-flex M8g
P – GPU accelerated	P3 P4 P4d P4de P5 P5e P5en
R – Memory optimized	R3 R4 R5 R5a R5ad R5b R5d R5dn R5n R6a R6g R6gd R6i R6id R6idn R6in R7a R7g R7gd R7i R7iz R8g
T – Burstable performance	T1 T2 T3 T3a T4g
U – High memory	U-3tb1 U-6tb1 U-9tb1 U-12tb1 U-18tb1 U-24tb1 U7i-6tb U7i-8tb U7i-12tb U7in-16tb U7in-24tb U7in-32tb
X – Memory intensive	X1 X1e X2gd X2idn X2iedn X2iezn X8g
Z – High memory	z1d

Note

- If an EC2 instance isn't listed, then it isn't supported by Compute Optimizer.
- Compute Optimizer doesn't generate EC2 rightsizing recommendations for Spot Instances.

Supported Amazon EC2 Auto Scaling groups

Compute Optimizer generates rightsizing and idle recommendations for Amazon EC2 Auto Scaling groups. This section outlines what Compute Optimizer supports for both types of recommendations.

Rightsizing recommendations

Compute Optimizer supports rightsizing recommendations for EC2 Auto Scaling groups that have the following:

- Single EC2 instance types
- Mixed EC2 instance types
- One or multiple scaling policies based on CPU utilization:
 - Target tracking
 - Predictive scaling
 - · Simple scaling
 - · Step scaling
- Scheduled scaling policies
- No scaling policy

Note

Compute Optimizer doesn't support rightsizing recommendations for EC2 Auto Scaling groups that have the following:

- EC2 instance types that aren't <u>supported by Compute Optimizer</u>
- Spot Instances
- Mixed instance types that contain any instances outside of the C, M, or R instance families
- Amazon ECS or Amazon EKS workloads
- Mixed instance types containing both AMD and Intel instances
- Mixed instance types using instance weights
- Mixed instance types containing both x86 and Graviton instances

 Mixed instance types containing instances on different platforms, such as Windows, SQL Server, and Linux

Idle recommendations

Compute Optimizer supports idle recommendations for EC2 Auto Scaling groups that use most of the <u>Supported Amazon EC2 instance types</u>. This includes EC2 Auto Scaling groups that have the following:

- EC2 Spot Instances
- Mixed instance types containing any of the instance families that Compute Optimizer supports (including G and P instance families)
- Amazon ECS or Amazon EKS workloads

Supported Amazon EBS volume types

Compute Optimizer generates recommendations for the following EBS volume types that are attached to an instance:

- HDD st1 and sc1
- General Purpose SSD gp2 and gp3
- Provisioned IOPS SSD io1, io2, and io2 Block Express

Compute Optimizer also generates recommendations to move your data out from previous generation HDD Magnetic volumes. For more information, see <u>Amazon EBS previous generation</u> volumes.

Supported Amazon Aurora and RDS databases

The following sections outline the Amazon Aurora and RDS resources supported by Compute Optimizer.

Idle recommendations 8

Database engines

Compute Optimizer Compute Optimizer generates recommendations for Amazon Aurora and RDS databases running the following engines:

- · RDS for MySQL
- RDS for PostgreSQL
- Aurora MySQL-Compatible Edition
- Aurora PostgreSQL-Compatible Edition

RDS DB instances

Compute Optimizer generates recommendations for several DB instance types. For more information about Aurora and RDS DB instance types, see <u>DB instance classes</u> in the *Amazon Relational Database Service User Guide* and <u>DB instance class types</u> in the *Amazon Aurora User Guide for Aurora*.

The following tables list the DB instance types for the databases that are supported by Compute Optimizer.

Amazon RDS

The DB instance types for the RDS for MySQL and RDS for PostgreSQL database engines supported by Compute Optimizer.

DB instance class family	Туре
General purpose	db.m7g db.m6g db.m6i db.m5 db.m3 db.m1 db.m2 db.m5d db.m6gd db.m6i
Memory-optimized R family	db.r3 db.r4 db.r5 db.r5b db.r5d db.r6g db.r6gd db.r6i db.r7g
Burstable-performance	db.t3 db.t4g
Memory-optimized Z family	db.x2g db.x2idn db.x2iedn

Database engines 9

Amazon Aurora

The DB instance types for the Aurora MySQL-Compatible Edition and Aurora PostgreSQL-Compatible Edition database engines supported by Compute Optimizer.

DB instance class family	Туре
Memory-optimized R family	db.r4 db.r5 db.r6g db.r6i db.r7g
Memory-optimized X family	db.x2g
Burstable-performance	db.t2 db.t3 db.t4g
Optimized Reads	db.r6gd db.r6id



Note

Compute Optimizer doesn't support db.serverless – Aurora Serverless v2 instance class with automatic capacity scaling.

RDS DB instance storage

Compute Optimizer generates recommendations for the following RDS DB instance storage volume types:

- General Purpose SSD gp2 and gp3
- Provisioned IOPS SSD io1

Aurora DB cluster storage

Compute Optimizer generates recommendations for Aurora DB cluster storage Aurora Standard configurations.

RDS DB instance storage



Note

Compute Optimizer only provides recommendations to switch from Aurora Standard to Aurora I/O-Optimized storage configurations.

For more information about both configurations, see Amazon Aurora storage in the Amazon Aurora User Guide for Aurora.

Additional resources

- Resource requirements
- Metrics analyzed by AWS Compute Optimizer
- Getting started with AWS Compute Optimizer

Additional resources 11

Resource requirements

This page provides you with an overview of the resource requirements needed for AWS Compute Optimizer to generate optimization recommendations. For Compute Optimizer to generate recommendations, your AWS resources must meet Amazon CloudWatch metric and resource-specific requirements. Compute Optimizer has different CloudWatch metric data requirements for each resource type.

If your resources don't have enough metric data, allow for more time before the recommendations start appearing in the Compute Optimizer console. For example, if your resources have enough metric data but the recommendations aren't showing up, this probably means that Compute Optimizer is still analyzing your resources. It can take up to 24 hours to complete the analysis. After the analysis is complete, resource recommendations appear in the Compute Optimizer console.

Topics

- Amazon EC2 instance and EC2 Auto Scaling group requirements
- Amazon EBS volume requirements
- Lambda function requirements
- Requirements for Amazon ECS services on Fargate
- Commercial software license requirements
- Amazon Aurora and RDS database requirements
- Additional resources

Amazon EC2 instance and EC2 Auto Scaling group requirements

Amazon EC2 instances and EC2 Auto Scaling groups both require at least 30 hours of CloudWatch metric data in the past 14 days.

If you enabled the enhanced infrastructure metrics feature, both EC2 instances and EC2 Auto Scaling require at least 30 hours of CloudWatch metric data over the past 93 days. For more information, see Enhanced infrastructure metrics.

For a list of the instance types supported by Compute Optimizer, see <u>Supported Amazon EC2</u> <u>instance types</u>. For information about the EC2 Auto Scaling groups that Compute Optimizer supports, see <u>Supported Amazon EC2 Auto Scaling groups</u>.

Important

You must enable Cost Explorer to allow Compute Optimizer to use Cost Explorer's billing data to calculate savings and populate pricing information for your recommendations. We recommend that you also opt in to Cost Optimization Hub to receive rightsizing recommendations that consider any Reserved Instances or Savings Plans pricing models that are active in your accounts. For more information, see Enabling Cost Explorer and Getting started with Cost Optimization Hub in the AWS Cost Management User Guide.

Amazon EBS volume requirements

Compute Optimizer generates recommendations for EBS volume types that are attached to a running instance for at least 30 consecutive hours. Data is only reported to CloudWatch when the volume is attached to a running instance. If you detach an EBS volume from an EC2 instance, the recommendations for that volume will no longer be available.

For a list of Amazon EBS volume types supported by Compute Optimizer, see Supported Amazon EBS volume types.

Lambda function requirements

Compute Optimizer generates memory size recommendations only for Lambda functions that meet the following requirements:

- The configured memory is less than or equal to 1,792 MB.
- The functions were invoked at least 50 times in the last 14 days.

Functions that don't meet these requirements are given a finding of **Unavailable**. The reason code of **Inconclusive** applies to functions that have configured memory greater than 1,792 MB. Insufficient data applies to functions that have been invoked fewer than 50 times in the last 14 days.

Functions with a finding of **Unavailable** don't appear in the Compute Optimizer console and don't receive recommendations.



Note

Lambda functions don't require CloudWatch metric data.

Requirements for Amazon ECS services on Fargate

To generate recommendations for Amazon ECS services on Fargate, Compute Optimizer requires the following:

- Your services have at least 24 hours of CloudWatch and Amazon ECS utilization metrics in the past 14 days.
- No step scaling policy is attached.
- No target scaling policy is attached to CPU and memory.



Note

If a target tracking policy is attached to the service's CPU only, Compute Optimizer only generates memory size recommendations. Or, if a target tracking policy is attached to the service's memory only, Compute Optimizer only generates CPU size recommendations.

The service run status is SteadyState or MoreWork.

For more information about the metrics analyzed, see Metrics for Amazon ECS services on Fargate.

Commercial software license requirements

Compute Optimizer only generates license recommendations for Microsoft SQL Server on Amazon EC2.

To generate recommendations for commercial software licenses, Compute Optimizer requires the following:

- At least 30 consecutive hours of CloudWatch metric data.
- Enable CloudWatch Application Insights using your Microsoft SQL Server database credentials.

For more information about how to enable CloudWatch Application Insights, see <u>Set up Amazon</u> CloudWatch Application Insights for monitoring in the *Amazon CloudWatch User Guide*.

• Attach the required instance role and policy for CloudWatch Application Insights. For more information, see Policies to enable commercial software license recommendations.

For more information about the metrics analyzed, see Metrics for commercial software licenses.

Amazon Aurora and RDS database requirements

Compute Optimizer generates Aurora and RDS DB instances, RDS DB instance storage, and Aurora DB cluster recommendations for RDS for MySQL, RDS for PostgreSQL, and Amazon Aurora databases.

Amazon Aurora and RDS instances

To generate recommendations for your Aurora and RDS DB instances, Compute Optimizer requires the following:

- At least 30 hours of CloudWatch metric data in the past 14 days. If you enabled the enhanced infrastructure metrics feature, DB instances require at least 30 hours of metric data over the past 93 days. For more information, see Enhanced infrastructure metrics.
- To receive recommendations for RDS DB instances that are over-provisioned, you need to enable Amazon RDS Performance Insights. To enable Performance Insights for your DB instances, see <u>Turning Performance Insights on and off for Amazon RDS</u> in the *Amazon Relational Database* Service User Guide.

Aurora DB clusters

To generate recommendations for your Aurora DB clusters, Compute Optimizer requires the following:

- No application Auto Scaling policy is attached to the Aurora DB cluster. For more information about Aurora Auto Scaling, see Amazon Aurora User Guide.
- The Aurora DB cluster has at least 14 days of cost usage data.
- The Aurora DB cluster has not used Aurora Parallel Query over the lookback period.

• The Aurora DB cluster has not changed storage configuration in the last 30 days.

Additional resources

- AWS resources supported by Compute Optimizer
- Metrics analyzed by AWS Compute Optimizer
- Getting started with AWS Compute Optimizer

Additional resources 16

Getting started with AWS Compute Optimizer

When you access the AWS Compute Optimizer console for the first time, you're asked to opt in using the account that you're signed in with. Before you can use the service, you must opt in or out. In addition, you can also opt in or opt out using the Compute Optimizer API, AWS Command Line Interface (AWS CLI), or SDKs.

By opting in, you're authorizing Compute Optimizer to analyze the specifications and utilization metrics of your AWS resources. Examples include EC2 instances and EC2 Auto Scaling groups.



Note

To improve the recommendation quality of Compute Optimizer, Amazon Web Services might use your CloudWatch metrics and configuration data. This includes up to three months (93 days) of metrics analysis when you activate the enhanced infrastructure metrics feature. Contact AWS Support to request that AWS stop using your CloudWatch metrics and configuration data to improve the recommendation quality of Compute Optimizer.

Required permissions

You must have the appropriate permissions to opt in to Compute Optimizer, to view its recommendations, and to opt out. For more information, see Identity and Access Management for AWS Compute Optimizer.

When you opt in, Compute Optimizer automatically creates a Service-Linked Role in your account to access its data. For more information, see Using service-linked roles for AWS Compute Optimizer.

Accounts supported by Compute Optimizer

The following AWS account types can opt in to Compute Optimizer:

Standalone AWS account

A standalone AWS account that doesn't have AWS Organizations enabled. If you opt in to Compute Optimizer while signed in to a standalone account, Compute Optimizer analyzes the resources in the account and generates optimization recommendations for those resources.

17 Required permissions

Member account of an organization

An AWS account that's a member of an organization. If you opt in to Compute Optimizer while signed in to a member account of an organization, Compute Optimizer only analyzes the resources in the member account and generates optimization recommendations for those resources.

Management account of an organization

An AWS account that administers an organization. If you opt in to Compute Optimizer while signed in to a management account of an organization, Compute Optimizer gives you the option to opt in the management account only, or the management account and all member accounts of the organization.

Important

To opt in all member accounts for an organization, make sure that the organization has all features enabled. For more information, see Enabling All Features in Your Organization in the AWS Organizations User Guide.

When you opt in using your organization's management account and include all member accounts within the organization, trusted access for Compute Optimizer is enabled in your organization account. For more information, see Trusted access for AWS Organizations.

Next steps

For instructions on how to opt in your account, or the accounts within your organization, to AWS Compute Optimizer, see Opting in to AWS Compute Optimizer.

Additional resources

- Identity and Access Management for AWS Compute Optimizer
- AWS managed policies for AWS Compute Optimizer
- Using service-linked roles for AWS Compute Optimizer

Next steps

Opting in to AWS Compute Optimizer

Use the following procedure to opt in your account, or the accounts within your organization, to AWS Compute Optimizer. You can opt in using the Compute Optimizer console or the AWS Command Line Interface (AWS CLI).



Note

If your account is already opted in, but you want to opt in again to re-enable trusted access for Compute Optimizer in your organization. You can opt in again, but this must be done using the AWS CLI. When you opt in using the AWS CLI, run the updateenrollment-status command and specify the --include-member-accounts parameter. Alternatively, you can enable trusted access directly in the AWS Organizations console or by using AWS CLI or API. For more information, see Using AWS Organizations with other AWS services in the AWS Organizations User Guide.

Prerequisites

Make sure your IAM identity has appropriate permissions to opt in to AWS Compute Optimizer. The suggested policy that grants this permission is Policy to opt in to Compute Optimizer.

Procedure

Console

To opt in to Compute Optimizer

1. Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.

If this is your first time using the Compute Optimizer console, the **Compute Optimizer** landing page is displayed.

- Choose **Get started**.
- On the **Account setup** page, review the **Getting started** and **Setting up your account** sections.
- The following options are displayed if the account that you're signed in to is the management account of your organization. Choose one before continuing to the next step.

• Only this account - Choose this option to opt in only the account that you're currently signed in to. If you choose this option, Compute Optimizer analyzes resources that are in the individual account, and generates optimization recommendations for those resources.

• All accounts within this organization - Choose this option to opt in the account you're currently signed in to, and all of its member accounts. If you choose this option, Compute Optimizer analyzes resources that are in all accounts in the organization, and generates optimization recommendations for those resources.



Note

If you add any new member accounts to your organization after you opt in, Compute Optimizer automatically opts in those accounts.

Choose Opt in. By opting in, you indicate that you agree to and understand the 5. requirements to opt in to Compute Optimizer.

After you opt in, you're redirected to the dashboard in the Compute Optimizer console. At the same time, the service immediately starts analyzing the configuration and utilization metrics of your AWS resources. For more information, see Metrics analyzed by AWS Compute Optimizer.



Note

When you complete the opt in process, it can up to 24 hours for the opted-in accounts to appear in the Compute Optimizer console.

CLI

To opt in to Compute Optimizer

Open a terminal or command prompt window.

If you didn't already install the AWS CLI already, install and configure it to work with Compute Optimizer. For more information, see Installing the AWS CLI and Quickly Configuring the AWS CLI in the AWS Command Line Interface User Guide.

Procedure 20

2. Enter one of the following commands. Choose if you want to opt in your individual account or the management account of your organization and all its member accounts.

• To opt in your individual account:

```
aws compute-optimizer update-enrollment-status --status Active
```

 To opt in the management account of an organization and include all member accounts within the organization:

```
aws compute-optimizer update-enrollment-status --status Active --include-member-accounts
```

After you opt in to Compute Optimizer using the previous command, the service begins analyzing the configuration and utilization metrics of your AWS resources. For more information, see Metrics analyzed by AWS Compute Optimizer.

Next steps

- Make sure that your AWS resources meet the necessary requirements for Compute Optimizer
 to generate your receommendations. And allow for at least 24 hours for your optimization
 recommendations to be generated. be generated. For more information, see Resource
 requirements.
- View the findings and recommendations in the dashboard and recommendation pages of the Compute Optimizer console. For more information, see <u>Using the AWS Compute Optimizer</u> dashboard and Viewing resource recommendations.
- Consider extending the lookback period from the 14-day default period to 93 days by activating the enhanced infrastructure metrics feature. For more information, see Enhanced infrastructure metrics.
- Using the management account of your organization, you can delegate a member account as an administrator for Compute Optimizer. For more information, see <u>Delegating an administrator</u> account.

Additional resources

Identity and Access Management for AWS Compute Optimizer

Next steps 21

- AWS managed policies for AWS Compute Optimizer
- Using service-linked roles for AWS Compute Optimizer
- Troubleshooting Troubleshooting in Compute Optimizer

Opting out of Compute Optimizer

Use the following procedure to opt your account out of Compute Optimizer using the AWS CLI. This procedure also deletes your account's recommendations and related metrics data from Compute Optimizer. For more information, see update-enrollment-status in the AWS CLI Command Reference.



Note

You can't opt out using the Compute Optimizer console.

Procedure

To opt an account out of Compute Optimizer

Open a terminal or command prompt window.

If you haven't already, install the AWS CLI and configure it to work with Compute Optimizer. For more information, see Installing the AWS CLI and Quickly Configuring the AWS CLI in the AWS Command Line Interface User Guide.

Enter the following command.

aws compute-optimizer update-enrollment-status --status Inactive



Note

You can't specify the --include-member-accounts parameter when opting out with the update-enrollment-status command. If you specify this parameter when opting out with this command, an error occurs.

Opting out 22

Your account is opted out of Compute Optimizer after running the previous command. At the same time, your account's recommendations and related metrics data are deleted from Compute Optimizer. If you access the Compute Optimizer console, the option to opt in again should be displayed.

Identity and Access Management for AWS Compute Optimizer

You can use AWS Identity and Access Management (IAM) to create identities (users, groups, or roles), and give those identities permissions to access the AWS Compute Optimizer console and APIs.

By default, IAM users don't have access to the Compute Optimizer console and APIs. You give users access by attaching IAM policies to a single user, a group of users, or a role. For more information, see Identities (Users, Groups, and Roles) and Overview of IAM Policies in the IAM User Guide.

After you create IAM users, you can give those users individual passwords. Then, they can sign in to your account and view Compute Optimizer information by using an account-specific sign-in page. For more information, see How Users Sign In to Your Account.

Important

- To view recommendations for EC2 instances, an IAM user requires the ec2:DescribeInstances permission.
- To view recommendations for EBS volumes, an IAM user requires the ec2:DescribeVolumes permission.
- To view recommendations for EC2 Auto Scaling groups, an IAM user requires the autoscaling: DescribeAutoScalingGroups and autoscaling: DescribeAutoScalingInstances permissions.
- To view recommendations for Lambda functions, an IAM user requires the lambda:ListFunctions and lambda:ListProvisionedConcurrencyConfigs permissions.
- To view recommendations for Amazon ECS services on Fargate, an IAM user requires the ecs:ListServices and ecs:ListClusters permissions.
- To view current CloudWatch metrics data in the Compute Optimizer console, an IAM user requires the cloudwatch: GetMetricData permission.

• To view recommendations commercial software licenses, certain Amazon EC2 instance roles and IAM user permissions are required. For more information see, <u>Policies to enable</u> commercial software license recommendations.

 To view recommendations for Amazon RDS, an IAM user requires the rds:DescribeDBInstances and rds:DescribeDBClusters permissions.

If the user or group that you want to give permissions to already has a policy, you can add one of the Compute Optimizer specific policy statements illustrated here to that policy.

Topics

- Trusted access for AWS Organizations
- · Policy to opt in to Compute Optimizer
- Policies to grant access to Compute Optimizer for standalone AWS accounts
- Policies to grant access to Compute Optimizer for a management account of an organization
- Policies to grant access to manage Compute Optimizer recommendation preferences
- Policies to enable commercial software license recommendations
- Policy to deny access to Compute Optimizer
- Additional resources

Trusted access for AWS Organizations

When you opt in using your organization's management account and include all member accounts within the organization, trusted access for Compute Optimizer is automatically enabled in your organization account. This allows Compute Optimizer to analyze compute resources in those member accounts, and generate recommendations for them.

Every time that you access recommendations for member accounts, Compute Optimizer verifies that trusted access is enabled in your organization account. If you disable Compute Optimizer trusted access after you opt in, Compute Optimizer denies access to recommendations for your organization's member accounts. Moreover, the member accounts within the organization aren't opted in to Compute Optimizer. To re-enable trusted access, opt in to Compute Optimizer again using your organization's management account and include all the member accounts within the organization. For more information, see Opting in to AWS Compute Optimizer. For more

information about AWS Organizations trusted access, see <u>Using AWS Organizations with other AWS</u> services in the *AWS Organizations User Guide*.

Policy to opt in to Compute Optimizer

This policy statement grants the following:

- · Access to opt in to Compute Optimizer.
- Access to create a service-linked role for Compute Optimizer. For more information, see <u>Using</u> service-linked roles for AWS Compute Optimizer.
- Access to update the enrollment status to the Compute Optimizer service.

▲ Important

This IAM role is required to opt in to AWS Compute Optimizer.

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": "iam:CreateServiceLinkedRole",
            "Resource": "arn:aws:iam::*:role/aws-service-role/compute-
optimizer.amazonaws.com/AWSServiceRoleForComputeOptimizer*",
            "Condition": {"StringLike": {"iam:AWSServiceName": "compute-
optimizer.amazonaws.com"}}
        },
        {
            "Effect": "Allow",
            "Action": "iam:PutRolePolicy",
            "Resource": "arn:aws:iam::*:role/aws-service-role/compute-
optimizer.amazonaws.com/AWSServiceRoleForComputeOptimizer"
        },
        {
            "Effect": "Allow",
            "Action": "compute-optimizer:UpdateEnrollmentStatus",
            "Resource": "*"
        }
    ]
```

}

Policies to grant access to Compute Optimizer for standalone AWS accounts

The following policy statement grants full access to Compute Optimizer for standalone AWS accounts.

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": [
                "compute-optimizer:*",
                "ec2:DescribeInstances",
                "ec2:DescribeVolumes",
                "ecs:ListServices",
                "ecs:ListClusters",
                "autoscaling:DescribeAutoScalingGroups",
                "autoscaling:DescribeAutoScalingInstances",
                "lambda:ListFunctions",
                "lambda:ListProvisionedConcurrencyConfigs",
                "cloudwatch:GetMetricData"
            ],
            "Resource": "*"
        }
    ]
}
```

The following policy statement grants read-only access to Compute Optimizer for standalone AWS accounts.

Access for standalone accounts 26

```
"compute-optimizer:GetRecommendationSummaries",
                "compute-optimizer:GetEC2InstanceRecommendations",
                "compute-optimizer:GetEC2RecommendationProjectedMetrics",
                "compute-optimizer:GetAutoScalingGroupRecommendations",
                "compute-optimizer:GetEBSVolumeRecommendations",
                "compute-optimizer:GetLambdaFunctionRecommendations",
                "compute-optimizer:DescribeRecommendationExportJobs",
                "compute-optimizer:GetEffectiveRecommendationPreferences",
                "compute-optimizer:GetRecommendationPreferences",
                "compute-optimizer:GetECSServiceRecommendations",
                "compute-optimizer:GetECSServiceRecommendationProjectedMetrics",
                "compute-optimizer:GetRDSDatabaseRecommendations",
                "compute-optimizer:GetRDSDatabaseRecommendationProjectedMetrics",
                "compute-optimizer:GetIdleRecommendations",
                "ec2:DescribeInstances",
                "ec2:DescribeVolumes",
                "ecs:ListServices",
                "ecs:ListClusters",
                "autoscaling:DescribeAutoScalingGroups",
                "autoscaling:DescribeAutoScalingInstances",
                "lambda:ListFunctions",
                "lambda:ListProvisionedConcurrencyConfigs",
                "cloudwatch:GetMetricData",
                "rds:DescribeDBInstances",
                "rds:DescribeDBClusters"
            ],
            "Resource": "*"
        }
    ]
}
```

Policies to grant access to Compute Optimizer for a management account of an organization

The following policy statement grants full access to Compute Optimizer for a management account of your organization.

```
"Action": [
                "compute-optimizer:*",
                "ec2:DescribeInstances",
                "ec2:DescribeVolumes",
                "ecs:ListServices",
                "ecs:ListClusters",
                "autoscaling:DescribeAutoScalingGroups",
                "autoscaling:DescribeAutoScalingInstances",
                "lambda:ListFunctions",
                "lambda:ListProvisionedConcurrencyConfigs",
                "cloudwatch:GetMetricData",
                "organizations:ListAccounts",
                "organizations:DescribeOrganization",
                "organizations:DescribeAccount",
                "organizations: EnableAWSServiceAccess",
                "organizations:ListDelegatedAdministrators",
                "organizations: Register Delegated Administrator",
                "organizations:DeregisterDelegatedAdministrator"
            ],
            "Resource": "*"
        }
    ]
}
```

The following policy statement grants read-only access to Compute Optimizer for a management account of an organization.

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": [
                "compute-optimizer:GetEnrollmentStatus",
                "compute-optimizer:GetEnrollmentStatusesForOrganization",
                "compute-optimizer:GetRecommendationSummaries",
                "compute-optimizer:GetEC2InstanceRecommendations",
                "compute-optimizer:GetEC2RecommendationProjectedMetrics",
                "compute-optimizer:GetAutoScalingGroupRecommendations",
                "compute-optimizer:GetEBSVolumeRecommendations",
                "compute-optimizer:GetLambdaFunctionRecommendations",
                "compute-optimizer:GetEffectiveRecommendationPreferences",
                "compute-optimizer:GetRecommendationPreferences",
```

```
"compute-optimizer:GetECSServiceRecommendations",
                "compute-optimizer:GetECSServiceRecommendationProjectedMetrics",
                "compute-optimizer:GetRDSDatabaseRecommendations",
                "compute-optimizer:GetRDSDatabaseRecommendationProjectedMetrics",
                "compute-optimizer:GetIdleRecommendations",
                "ec2:DescribeInstances",
                "ec2:DescribeVolumes",
                "ecs:ListServices",
                "ecs:ListClusters",
                "autoscaling:DescribeAutoScalingGroups",
                "autoscaling:DescribeAutoScalingInstances",
                "lambda:ListFunctions",
                "lambda:ListProvisionedConcurrencyConfigs",
                "cloudwatch:GetMetricData",
                "organizations:ListAccounts",
                "organizations:DescribeOrganization",
                "organizations:DescribeAccount",
                "organizations:ListDelegatedAdministrators",
                "rds:DescribeDBInstances",
                "rds:DescribeDBClusters"
            ],
            "Resource": "*"
        }
    ]
}
```

Policies to grant access to manage Compute Optimizer recommendation preferences

The following policy statements grant access to view and edit recommendation preferences.

Grant access to manage recommendation preferences for EC2 instances only

Grant access to manage recommendation preferences for EC2 Auto Scaling groups only

```
{
 "Version": "2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": [
                "compute-optimizer:DeleteRecommendationPreferences",
                "compute-optimizer:GetEffectiveRecommendationPreferences",
                "compute-optimizer:GetRecommendationPreferences",
                "compute-optimizer:PutRecommendationPreferences"
            ],
            "Resource": "*",
            "Condition" : {
                "StringEquals" : {
                    "compute-optimizer:ResourceType" : "AutoScalingGroup"
                }
            }
        }
    ]
}
```

Grant access to manage recommendation preferences for RDS instances only

Policies to enable commercial software license recommendations

For Compute Optimizer to generate license recommendations, attach the following Amazon EC2 instance roles and policies.

- The AmazonSSMManagedInstanceCore role to enable Systems Manager. For more information, see <u>AWS Systems Manager identity-based policy examples</u> in the *AWS Systems Manager User* Guide.
- The CloudWatchAgentServerPolicy policy to enable the release of instance metrics and logs to CloudWatch. For more information, see CloudWatch agent in the Amazon CloudWatch User Guide.
- The following IAM inline policy statement to read the secret Microsoft SQL Server connection string stored in AWS Systems Manager. For more information about inline policies, see Managed policies and inline policies in the AWS Identity and Access Management User Guide.

Enable license recommendations 31

```
}
```

Additionally, to enable and receive license recommendations, attach the following IAM policy to your user, group or role. For more information, IAM policy in the *Amazon CloudWatch User Guide*.

Policy to deny access to Compute Optimizer

The following policy statement denies access to Compute Optimizer.

Additional resources

- Troubleshooting <u>Troubleshooting in Compute Optimizer</u>
- Opting in to AWS Compute Optimizer

Deny access 32

- AWS managed policies for AWS Compute Optimizer
- Using service-linked roles for AWS Compute Optimizer

AWS managed policies for AWS Compute Optimizer

To add permissions to users, groups, and roles, consider using AWS managed policies rather than to writing your own policies. It takes time and expertise to <u>create IAM customer managed policies</u> that provide your team with only the permissions they need. To get started quickly, you can use AWS managed policies. These policies cover common use cases and are available in your AWS account. For more information about AWS managed policies, see <u>AWS managed policies</u> in the *IAM User Guide*.

AWS services maintain and update AWS managed policies. You can't change the permissions in AWS managed policies. Services occasionally add additional permissions to an AWS managed policy to support new features. This type of update affects all identities (users, groups, and roles) where the policy is attached. Services are most likely to update an AWS managed policy when a new feature is launched or when new operations become available. Services don't remove permissions from an AWS managed policy, so policy updates won't break your existing permissions.

Additionally, Amazon Web Services supports managed policies for job functions that span multiple services. For example, the **ReadOnlyAccess** AWS managed policy provides read-only access to all and resources. When a service launches a new feature, AWS adds read-only permissions for new operations and resources. For a list and descriptions of job function policies, see <u>AWS managed</u> policies for job functions in the *IAM User Guide*.

Topics

- AWS managed policy: ComputeOptimizerServiceRolePolicy
- AWS managed policy: ComputeOptimizerReadOnlyAccess
- Compute Optimizer updates to AWS managed policies

AWS managed policy: ComputeOptimizerServiceRolePolicy

The ComputeOptimizerServiceRolePolicy managed policy is attached to a service-linked role that allows Compute Optimizer to perform actions on your behalf. For more information, see <u>Using</u> service-linked roles for AWS Compute Optimizer.

AWS managed policies 33



Note

You can't attach ComputeOptimizerServiceRolePolicy to your IAM entities.

Permissions details

This policy includes the following permissions.

- compute-optimizer Grants full administrative permissions to all resources in Compute Optimizer.
- organizations Allows the management account of an AWS organization to opt in member accounts of the organization to Compute Optimizer.
- cloudwatch Grants access to CloudWatch resource metrics for the purpose of analyzing them and generating Compute Optimizer resource recommendations.
- autoscaling Grants access to EC2 Auto Scaling groups and the instances in EC2 Auto Scaling groups for validation purposes.
- Ec2 Grants access to Amazon EC2 instances and volumes.

```
"Version": "2012-10-17",
"Statement": [
  "Sid": "ComputeOptimizerFullAccess",
 "Effect": "Allow",
 "Action": [
   "compute-optimizer:*"
 ],
 "Resource": "*"
},
  "Sid": "AwsOrgsAccess",
 "Effect": "Allow",
  "Action": [
   "organizations:DescribeOrganization",
   "organizations:ListAccounts",
   "organizations:ListAWSServiceAccessForOrganization",
                                "organizations:ListDelegatedAdministrators"
 ],
```

```
"Resource": [
    11 * 11
   1
  },
   "Sid": "CloudWatchAccess",
   "Effect": "Allow",
   "Action": [
    "cloudwatch:GetMetricData",
    "cloudwatch:DescribeAlarms"
   ],
   "Resource": "*"
  },
   "Sid": "AutoScalingAccess",
   "Effect": "Allow",
   "Action": [
    "autoscaling:DescribeAutoScalingInstances",
    "autoscaling:DescribeAutoScalingGroups",
    "autoscaling:DescribePolicies",
                                  "autoscaling:DescribeScheduledActions"
   ],
   "Resource": "*"
  },
  {
                         "Sid": "Ec2Access",
                         "Effect": "Allow",
                         "Action": [
                                 "ec2:DescribeInstances",
                                 "ec2:DescribeVolumes"
                         ],
                         "Resource": "*"
                }
]
}
```

AWS managed policy: ComputeOptimizerReadOnlyAccess

You can attach the ComputeOptimizerReadOnlyAccess policy to your IAM identities.

This policy grants read-only permissions that allow IAM users to view Compute Optimizer resource recommendations.

Permissions details

This policy includes the following:

 compute-optimizer – Grants read-only access to Compute Optimizer resource recommendations.

- ec2 Grants read-only access to Amazon EC2 instances and Amazon EBS volumes.
- autoscaling Grants read-only access to EC2 Auto Scaling groups.
- lambda Grants read-only access to AWS Lambda functions and their configurations.
- cloudwatch Grants read-only access to Amazon CloudWatch metric data for resource types that are supported by Compute Optimizer.
- organizations Grants read-only access to member accounts of an AWS organization.
- ecs Grants access to Amazon ECS services on Fargate.
- rds Grants read-only access to Amazon RDS instances and clusters.

```
"Version": "2012-10-17",
 "Statement": [
   "Effect": "Allow",
   "Action": [
    "compute-optimizer:DescribeRecommendationExportJobs",
    "compute-optimizer:GetEnrollmentStatus",
    "compute-optimizer:GetEnrollmentStatusesForOrganization",
    "compute-optimizer:GetRecommendationSummaries",
    "compute-optimizer:GetEC2InstanceRecommendations",
    "compute-optimizer:GetEC2RecommendationProjectedMetrics",
    "compute-optimizer:GetAutoScalingGroupRecommendations",
    "compute-optimizer:GetEBSVolumeRecommendations",
    "compute-optimizer:GetLambdaFunctionRecommendations",
    "compute-optimizer:GetRecommendationPreferences",
    "compute-optimizer:GetEffectiveRecommendationPreferences",
    "compute-optimizer:GetECSServiceRecommendations",
    "compute-optimizer:GetECSServiceRecommendationProjectedMetrics",
    "compute-optimizer:GetLicenseRecommendations",
    "compute-optimizer:GetRDSDatabaseRecommendations",
                                "compute-
optimizer:GetRDSDatabaseRecommendationProjectedMetrics",
                                "compute-optimizer:GetIdleRecommendations",
```

```
"ec2:DescribeInstances",
    "ec2:DescribeVolumes",
    "ecs:ListServices",
    "ecs:ListClusters",
    "autoscaling:DescribeAutoScalingGroups",
    "autoscaling:DescribeAutoScalingInstances",
    "lambda:ListFunctions",
    "lambda:ListProvisionedConcurrencyConfigs",
    "cloudwatch:GetMetricData",
    "organizations:ListAccounts",
    "organizations:DescribeOrganization",
    "organizations:DescribeAccount",
    "rds:DescribeDBInstances",
                                 "rds:DescribeDBClusters"
   ],
   "Resource": "*"
  }
 ]
}
```

Note

The following policy statement only grants read-only access to Compute Optimizer for a management account of an organization to view org-level recommendations. If you're the delegated administrator and you want to view org-level recommendations, see Policies to grant access to Compute Optimizer for a management account of an organization.

Compute Optimizer updates to AWS managed policies

View details about updates to AWS managed policies for Compute Optimizer since this service began tracking these changes. For automatic alerts about changes to this page, subscribe to the RSS feed for this guide.

Change	Description	Date
Edit to the ComputeOp timizerServiceRole Policy managed policy	Added the cloudwatc h:DescribeAlarms , autoscaling:Descri bePolicies ,and	January 9, 2025

Policy updates 37

Change	Description	Date
	autoscaling:Descri beScheduledActions actions to the ComputeOp timizerServiceRole Policy managed policy.	
Edit to the ComputeOp timizerReadOnlyAcc ess managed policy	Added the compute-o ptimizer:GetIdleRe commendations actions to the ComputeOp timizerReadOnlyAcc ess managed policy.	November 20, 2024
Edit to the ComputeOp timizerReadOnlyAcc ess managed policy	Added the compute-o ptimizer:GetRDSDat abaseRecommendatio ns , compute-o ptimizer:GetRDSDat abaseRecommendatio nProjectedMetrics , rds:DescribeDBInst ances , and rds:Descr ibeDBClusters actions to the ComputeOp timizerReadOnlyAcc ess managed policy.	June 20, 2024
Edit to the ComputeOp timizerReadOnlyAcc ess managed policy	Added the compute-o ptimizer:GetLicens eRecommendations actions to the ComputeOp timizerReadOnlyAcc ess managed policy.	July 26, 2023

Policy updates 38

Change	Description	Date
Edit to the ComputeOp timizerReadOnlyAcc ess managed policy	Added the compute-o ptimizer:GetECSSer viceRecommendation s,compute-optimizer: GetECSServiceRecom mendationProjected Metrics,ecs:ListS ervices, and ecs:ListC lusters actions to the ComputeOptimizerRe adOnlyAccess managed policy.	December 22, 2022
Edit to the ComputeOp timizerServiceRole Policy managed policy	Added the ec2:Descr ibeInstances , ec2:DescribeVolumes , and organizations:List DelegatedAdministr ators actions to the ComputeOptimizerSe rviceRolePolicy managed policy.	July 25, 2022
Edit to the ComputeOp timizerServiceRole Policy managed policy	Added the autoscali ng:DescribeAutoSca lingInstances and autoscaling:Descri beAutoScalingGroup s actions to the ComputeOp timizerServiceRole Policy managed policy.	November 29, 2021

Policy updates 39

Change	Description	Date
Edit to the ComputeOp timizerReadOnlyAcc ess managed policy	Added the compute-o ptimizer:GetRecomm endationPreference s , compute-optimizer: GetEffectiveRecomm endationPreferences , and autoscaling:Descri beAutoScalingInsta nces actions to the ComputeOptimizerRe adOnlyAccess managed policy.	November 29, 2021
Edit to the ComputeOp timizerReadOnlyAcc ess managed policy	Added the GetEnroll mentStatusesForOrg anization action to the ComputeOptimizerRe adOnlyAccess managed policy.	August 26, 2021
Compute Optimizer started tracking changes	Compute Optimizer started tracking changes for its AWS managed policies.	May 18, 2021

Using service-linked roles for AWS Compute Optimizer

AWS Compute Optimizer uses AWS Identity and Access Management (IAM) <u>service-linked roles</u>. A service-linked role is a unique type of IAM role that's linked directly to Compute Optimizer. Service-linked roles are predefined by Compute Optimizer and include all of the permissions that the service requires to call other on your behalf.

With a service-linked role, setting up Compute Optimizer doesn't require manually adding the necessary permissions. Compute Optimizer defines the permissions of its service-linked roles, and unless defined otherwise, only Compute Optimizer can assume its roles. The defined permissions

Using Service-Linked Roles 40

include the trust policy and the permissions policy, and that permissions policy cannot be attached to any other IAM entity.

For information about other services that support service-linked roles, see <u>AWS Services That Work with IAM</u> and look for the services that have **Yes** in the **Role** column. Choose a **Yes** with a link to view the service-linked role documentation for that service.

Topics

- Service-linked role permissions for Compute Optimizer
- Service-linked role permissions
- Creating a Service-Linked Role for Compute Optimizer
- Editing a Service-Linked Role for Compute Optimizer
- Deleting a Service-Linked Role for Compute Optimizer
- Supported Regions for Compute Optimizer service-linked Roles
- Additional resources

Service-linked role permissions for Compute Optimizer

Compute Optimizer uses the service-linked role that's named **AWSServiceRoleForComputeOptimizer** to access Amazon CloudWatch metrics for AWS resources in the account.

The AWSServiceRoleForComputeOptimizer service-linked role trusts the following services to assume the role:

compute-optimizer.amazonaws.com

The role permissions policy allows Compute Optimizer to complete the following actions on the specified resources:

- Action: cloudwatch: GetMetricData on all AWS resources.
- Action: cloudwatch: DescribeAlarms on all AWS resources.
- Action: organizations:DescribeOrganization on all AWS resources.
- Action: organizations:ListAccounts on all AWS resources.
- Action: organizations:ListAWSServiceAccessForOrganization on all AWS resources.

- Action: organizations:ListDelegatedAdministrators on all AWS resources.
- Action: autoscaling:DescribeAutoScalingInstances on all AWS resources.
- Action: autoscaling: DescribeAutoScalingGroups on all AWS resources.
- Action: autoscaling: DescribePolicies on all AWS resources.
- Action: autoscaling:DescribeScheduledActions on all AWS resources.
- Action: ec2:DescribeInstances on all AWS resources.
- Action: ec2:DescribeVolumes on all AWS resources.

Service-linked role permissions

To create a service-linked role for Compute Optimizer, configure permissions to allow an IAM entity (such as a user, group, or role) to create the service-linked role. For more information, see <u>Service-Linked Role Permissions</u> in the *IAM User Guide*.

To allow an IAM entity to create a specific service-linked role for Compute Optimizer

Add the following policy to the IAM entity that needs to create the service-linked role.

```
{
    "Version": "2012-10-17",
    "Statement": [
        {
            "Effect": "Allow",
            "Action": "iam:CreateServiceLinkedRole",
            "Resource": "arn:aws:iam::*:role/aws-service-role/compute-
optimizer.amazonaws.com/AWSServiceRoleForComputeOptimizer*",
            "Condition": {"StringLike": {"iam:AWSServiceName": "compute-
optimizer.amazonaws.com"}}
        },
        {
            "Effect": "Allow",
            "Action": "iam:PutRolePolicy",
            "Resource": "arn:aws:iam::*:role/aws-service-role/compute-
optimizer.amazonaws.com/AWSServiceRoleForComputeOptimizer"
        },
        {
            "Effect": "Allow",
            "Action": "compute-optimizer:UpdateEnrollmentStatus",
            "Resource": "*"
```

```
}
      ]
}
```

To allow an IAM entity to create any service-linked role

Add the following statement to the permissions policy for the IAM entity that needs to create a service-linked role, or any service role that includes the needed policies. This policy attaches a policy to the role.

```
{
    "Effect": "Allow",
    "Action": "iam:CreateServiceLinkedRole",
    "Resource": "arn:aws:iam::*:role/aws-service-role/*"
}
```

Creating a Service-Linked Role for Compute Optimizer

You don't need to manually create a service-linked role. When you opt in to the Compute Optimizer service in the AWS Management Console, the AWS CLI, or the AWS API, Compute Optimizer creates the service-linked role for you.

Important

If you completed an action in another service that uses the features supported by the service-linked role, the role can appear in your account. For more information, see A New Role Appeared in My IAM Account.

If you delete this service-linked role, and then need to create it again, you can use the same process to recreate the role in your account. When you opt in to the Compute Optimizer service, Compute Optimizer creates the service-linked role for you again.

Editing a Service-Linked Role for Compute Optimizer

Compute Optimizer doesn't allow you to edit the AWSServiceRoleForComputeOptimizer servicelinked role. After you create a service-linked role, you can't change the name of the role because various entities might reference the role. However, you can edit the description of the role using IAM. For more information, see Editing a Service-Linked Role in the IAM User Guide.

Deleting a Service-Linked Role for Compute Optimizer

We recommend that, if you no longer need to use Compute Optimizer, you delete the AWSServiceRoleForComputeOptimizer service-linked role. That way you don't have an unused entity that's not actively monitored or maintained. However, before you can manually delete the service-linked role, you must opt out of Compute Optimizer.

To opt out of Compute Optimizer

For information about opting out of Compute Optimizer, see Opting out of Compute Optimizer.

To manually delete the service-linked role using IAM

Use the IAM console, the AWS CLI, or the AWS API to delete the AWSServiceRoleForComputeOptimizer service-linked role. For more information, see <u>Deleting a Service-Linked Role</u> in the *IAM User Guide*.

Supported Regions for Compute Optimizer service-linked Roles

Compute Optimizer supports using service-linked roles in all of the Regions where the service is available. To view the currently supported AWS Regions and endpoints for Compute Optimizer, see Compute Optimizer Endpoints and Quotas in the AWS General Reference.

Additional resources

- Troubleshooting <u>Troubleshooting in Compute Optimizer</u>
- AWS managed policies for AWS Compute Optimizer
- Opting in to AWS Compute Optimizer
- Identity and Access Management for AWS Compute Optimizer

Metrics analyzed by AWS Compute Optimizer

After you opt in, AWS Compute Optimizer analyzes the specifications, such as vCPUs, memory, or storage, and the Amazon CloudWatch metrics of your running resources from a period over the last 14 days. If you activate the enhanced infrastructure metrics recommendation preference, AWS Compute Optimizer analyzes your resources for up to 93 days.

The analysis can take up to 24 hours to complete. When the analysis is complete, the findings are displayed on the dashboard page of the Compute Optimizer console. For more information, see Using the AWS Compute Optimizer dashboard.

Note

- To generate recommendations for Amazon EC2 instances, EC2 Auto Scaling groups,
 Amazon EBS volumes, Lambda functions, and commercial software licenses, Compute
 Optimizer uses the maximum utilization point within each five-minute time interval over
 the lookback period. For ECS services on Fargate recommendations, Compute Optimizer
 uses the maximum utilization point within each one-minute time interval.
- AWS might use your utilization data to help improve the overall quality of Compute Optimizer's recommendations. To stop AWS using your utilization data, contact <u>AWS</u> Support.

Contents

- EC2 instance metrics
- EBS volume metrics
- · Lambda function metrics
- Metrics for Amazon ECS services on Fargate
- Metrics for commercial software licenses
- Aurora and RDS database metrics

EC2 instance metrics

Topics

EC2 instance metrics 45

- Metrics analyzed for EC2 instances
- Enabling memory utilization with the CloudWatch agent
- Enabling NVIDIA GPU utilization with the CloudWatch agent
- Configure external metrics ingestion

Metrics analyzed for EC2 instances

Compute Optimizer analyzes the following CloudWatch metrics of your EC2 instances, including instances that are part of EC2 Auto Scaling groups.

Metric	Description
CPUUtilization	The percentage of allocated EC2 compute units that are in use on the instance. This metric identifies the processing power that's required to run an application on an instance.
MemoryUtilization	The percentage of memory that's used during the sample period. This metric identifies the memory that's required to run an application on an instance. Memory utilization metrics are analyzed for the following resources: • EC2 instances with the CloudWatch agent that's installed on
	 them. For more information, see <u>Enabling memory utilization with the CloudWatch agent</u>. External EC2 instances from one of the four observability products: Datadog, Dynatrace, Instana, and New Relic. For more information, see <u>External metrics ingestion</u>.
GPUUtilization	The percentage of allocated GPUs that are currently in use on the instance. Note
	To allow Compute Optimizer analyze the GPU utilizati on metric of your instances, install the CloudWatch

Metric	Description
	agent on your instances. For more information, see Enabling NVIDIA GPU utilization with the CloudWatch agent.
GPUMemoryUtilization	The percentage of total GPU memory that's currently in use on the instance.
GPUEncoderStatsSes sionCount	The number of active encoding sessions on an NVIDIA GPU.
NetworkIn	The number of bytes that's received on all network interfaces by the instance. This metric identifies the volume of incoming network traffic to an instance.
NetworkOut	The number of bytes that are sent out on all network interface s by the instance. This metric identifies the volume of outgoing network traffic from an instance.
NetworkPacketsIn	The number of packets that are received by the instance.
NetworkPacketsOut	The number of packets that are sent out by the instance.
DiskReadOps	The read operations per second of the instance store volume of the instance.
DiskWriteOps	The write operations per second of the instance store volume of the instance.
DiskReadBytes	The read bytes per second of the instance store volume of the instance.
DiskWriteBytes	The write bytes per second of the instance store volume of the instance.
VolumeReadBytes	The read bytes per second of EBS volumes attached to the instance. Displayed as KiBs in the console.

Metric	Description
VolumeWriteBytes	The write bytes per second of EBS volumes attached to the instance. Displayed as KiBs in the console.
VolumeReadOps	The read operations per second of EBS volumes attached to the instance.
VolumeWriteOps	The write operations per second of EBS volumes attached to the instance.

For more information about instance metrics, see <u>List the available CloudWatch metrics for your instances</u> in the *Amazon Elastic Compute Cloud User Guide*. For more information about EBS volume metrics, see <u>Amazon CloudWatch metrics for Amazon EBS</u> in the *Amazon Elastic Compute Cloud User Guide*.

Enabling memory utilization with the CloudWatch agent

To have Compute Optimizer analyze the memory utilization metric of your instances, install the CloudWatch agent on your instances. Enabling Compute Optimizer to analyze memory utilization data for your instances provides an additional measurement of data that further improves Compute Optimizer's recommendations. For more information about installing the CloudWatch agent, see Collecting Metrics and Logs from Amazon EC2 Instances and On-Premises Servers with the CloudWatch agent in the Amazon CloudWatch User Guide.

On Linux instances, Compute Optimizer analyses the mem_used_percent metric in the CWAgent namespace, or the legacy MemoryUtilization metric in the System/Linux namespace. On Windows instances, Compute Optimizer analyses the Available MBytes metric in the CWAgent namespace. If both the Available MBytes and Memory % Committed Bytes In Use metrics are configured in the CWAgent namespace, Compute Optimizer chooses Available MBytes as the primary memory metric to generate recommendations.

Note

• We recommend that you configure the CWAgent namespace to use Available MBytes as your memory metric for Windows instances.

• Compute Optimizer also supports the Available KBytes and Available Bytes metrics, and prioritizes both over the Memory % Committed Bytes In Use metric when generating recommendations for Windows instances.

Additionally, the namespace must contain the InstanceId dimension. If the InstanceId dimension is missing or you overwrite it with a custom dimension name, Compute Optimizer can't collect memory utilization data for your instance. Namespaces and dimensions are defined in the CloudWatch agent configuration file. For more information, see Create the CloudWatch agent Configuration File in the Amazon CloudWatch User Guide.



Important

All of the CloudWatch namespaces and metric names are case sensitive.

Example: CloudWatch agent configuration for memory collection

```
{
    "agent": {
        "metrics_collection_interval": 60,
        "run_as_user": "root"
    },
    "metrics": {
        "namespace": "CWAgent",
        "append_dimensions": {
            "InstanceId": "${aws:InstanceId}"
        },
        "metrics_collected": {
            "mem": {
                "measurement": [
                     "mem_used_percent"
                ],
                "metrics_collection_interval": 60
            }
        }
    }
}
```

Enabling NVIDIA GPU utilization with the CloudWatch agent

To allow Compute Optimizer to analyze the NVIDIA GPU utilization metric of your instances, do the following:

- 1. Install the CloudWatch agent on your instances. For more information, see <u>Installing the CloudWatch agent</u> in the *Amazon CloudWatch User Guide*.
- 2. Allow the CloudWatch agent to collect NVIDIA GPU metrics. For more information, see <u>Collect NVIDIA GPU metrics</u> in the *Amazon CloudWatch User Guide*.

Compute Optimizer analyzes the following NVIDIA GPU metrics:

- nvidia_smi_utilization_gpu
- nvidia_smi_memory_used
- nvidia_smi_encoder_stats_session_count
- nvidia_smi_encoder_stats_average_fps
- nvidia_smi_encoder_stats_average_latency
- nvidia_smi_temperature_gpu

The namespace must contain the InstanceId dimension and index dimensions. If the dimensions are missing or you overwrite them with a custom dimension name, Compute Optimizer can't collect GPU utilization data for your instance. Namespaces and dimensions are defined in the CloudWatch agent configuration file. For more information, see Create the CloudWatch agent Configuration File in the Amazon CloudWatch User Guide.

Configure external metrics ingestion

You can use the external metrics ingestion feature to configure AWS Compute Optimizer to ingest EC2 memory utilization metrics from one of the four observability products: Datadog, Dynatrace, Instana, and New Relic. When you enable external metrics ingestion, Compute Optimizer analyzes your external EC2 memory utilization metrics in addition to your CPU, disk, network, IO, and throughput data to generate EC2 rightsizing recommendations. These recommendations can provide you with additional savings and enhanced performance. For more information, see External metrics ingestion.

EBS volume metrics

Compute Optimizer analyzes the following CloudWatch metrics of your EBS volumes.

Metric	Description
VolumeReadBytes	The read bytes per second of the EBS volume.
VolumeWriteBytes	The write bytes per second of the EBS volume.
VolumeReadOps	The read operations per second of the EBS volume.
VolumeWriteOps	The write operations per second of the EBS volume.

For more information about these metrics, see <u>Amazon CloudWatch metrics for Amazon EBS</u> in the *Amazon Elastic Compute Cloud User Guide*.

Lambda function metrics

Compute Optimizer analyzes the following CloudWatch metrics of your Lambda functions.

Metric	Description
Invocations	The number of times your function code is executed, including successful executions and executions that result in a function error.
Duration	The amount of time that your function code spends processing an event.
Errors	The number of invocations that result in a function error. Function errors include exceptions thrown by your code and exceptions thrown by the Lambda runtime. The runtime returns errors for issues such as timeouts and configuration errors.
Throttles	The number of invocation requests that are throttled.

EBS volume metrics 51

For more information about these metrics, see <u>Working with AWS Lambda function metrics</u> in the *AWS Lambda Developer Guide*.

In addition to these metrics, Compute Optimizer analyzes the memory utilization of your function during the look-back period. For more information about memory utilization for Lambda functions, see Understanding AWS Lambda behavior using Amazon CloudWatch Logs Insights in the AWS Management & Governance Blog and Using Lambda Insights in CloudWatch in the AWS Lambda Developer Guide.

Metrics for Amazon ECS services on Fargate

Compute Optimizer analyzes the following CloudWatch and Amazon ECS utilization metrics of your Amazon ECS services on Fargate.

Metric	Description
CPUUtilization	The percentage of CPU capacity that's used in the service.
MemoryUtilization	The percentage of memory that's used in the service.

For more information about these metrics, see <u>Amazon ECS CloudWatch metrics</u> in the *Amazon ECS User Guide for AWS Fargate*.

Metrics for commercial software licenses

Compute Optimizer analyzes the following metric to generate recommendations for commercial software licenses.

mssql_enterprise_features_used — the number of Microsoft SQL Server Enterprise edition features in use. The features are as follows:

- More than 128GB of memory for the buffer pool extension
- More than 48 vCPUs
- Always On availability groups with more than 1 database
- Asynchronous commit replicas
- Read-only replicas

- Asynchronous database mirroring
- tempdb memory-optimized metadata is enabled
- R or Python extensions
- Peer-to-peer replication
- Resource Governor

Aurora and RDS database metrics

Compute Optimizer analyzes the following CloudWatch metrics of your Amazon Aurora and RDS databases.

RDS DB instances

Compute Optimizer analyzes the following CloudWatch metrics of your Amazon RDS DB instances.

Metric	Description
CPUUtilization	The percentage of allocated compute units that are in use on the DB instance. This metric identifies the processing power that's required to run an application on an instance.
DatabaseConnections	The number of client sessions that are connected to the DB instance.
NetworkReceiveThro ughput	The incoming (receive) network traffic on the DB instance, including both customer database traffic and Amazon RDS traffic used for monitoring and replication.
NetworkTransmitThr oughput	The outgoing (transmit) network traffic on the DB instance, including both customer database traffic and Amazon RDS traffic used for monitoring and replication.
ReadIOPS	The average number of disk read I/O operations per second.
WriteIOPS	The average number of disk write I/O operations per second.
ReadThroughput	The average number of bytes read from disk per second.

User Guide **AWS Compute Optimizer**

Metric	Description
WriteThroughput	The average number of bytes written to disk per second.
EBSIOBalance%	The percentage of I/O credits remaining in the burst bucket of your RDS database. This metric is available for basic monitoring only.
EBSByteBalance%	The percentage of throughput credits remaining in the burst bucket of your RDS database. This metric is available for basic monitoring only.
FreeStorageSpace	The amount of available storage space.

If you enabled Amazon RDS Performance Insights, Compute Optimizer also analyzes the following metrics of your Amazon RDS DB instance. To enable Performance Insights for your DB instances, see Turning Performance Insights on and off for Amazon RDS in the Amazon Relational Database Service User Guide.



Note

If Performance Insights isn't enabled, Compute Optimizer doesn't provide recommendations to reduce vCPU capacity.

Metric	Description
DBLoad	The level of session activity in your database. For more information, see <u>Database load</u> in the <i>Amazon Relational Database Service User Guide</i> .
os.swap.in	The amount of memory, in kilobytes, swapped in from disk.
os.swap.out	The amount of memory, in kilobytes, swapped out to disk.

For more information about Amazon RDS metrics, see Metrics reference for Amazon RDS in the Amazon Relational Database Service User Guide.

Aurora DB instances

Compute Optimizer analyzes the following CloudWatch metrics of your Amazon Aurora DB instances.

Metric	Description
CPUUtilization	The percentage of CPU used by an Aurora DB instance.
DatabaseConnections	The number of client network connections to the database instance.
NetworkReceiveThro ughput	The amount of network throughput received from clients by each instance in the Aurora DB cluster. This throughpu t doesn't include network traffic between instances in the Aurora DB cluster and the cluster volume.
NetworkTransmitThr oughput	The amount of network throughput sent to clients by each instance in the Aurora DB cluster. This throughput doesn't include network traffic between instances in the DB cluster and the cluster volume.
StorageNetworkRead Throughput	The amount of network throughput received from the Aurora storage subsystem by each instance in the DB cluster.
StorageNetworkWrit eThroughput	The amount of network throughput sent to the Aurora storage subsystem by each instance in the Aurora DB cluster.
AuroraMemoryHealth State	Indicates the memory health state. A value of 0 equals NORMAL. A value of 10 equals RESERVED, which means that the server is approaching a critical level of memory usage.
	Note This metric applies to Aurora MySQL only.
AuroraMemoryNumDec linedSqlTotal	The total number of queries declined as part of out-of-me mory (OOM) avoidance.

Metric	Description
	Note This metric applies to Aurora MySQL only.
AuroraMemoryNumKil lConnTotal	The total number of connections closed as part of OOM avoidance.
	Note This metric applies to Aurora MySQL only.
AuroraMemoryNumKil lQueryTotal	The total number of queries ended as part of OOM avoidance.
	(i) Note This metric applies to Aurora MySQL only.
ReadIOPSEphemeralS torage	The average number of disk read I/O operations to Ephemeral NVMe storage.
	Note This metric applies to instances that support locally attached non-volatile memory express (NVMe) storage.

Metric	Description
WriteIOPSEphemeral Storage	The average number of disk write I/O operations to Ephemeral NVMe storage.
	(3) Note This metric applies to instances that support locally attached non-volatile memory express (NVMe) storage.
ReadIOPS	The average number of disk I/O operations per second but the reports read and write separately, in 1-minute intervals.
WriteIOPS	The number of Aurora storage write records generated per second. This is more or less the number of log records generated by the database. These do not correspond to 8K page writes, and do not correspond to network packets sent.

For more information, see <u>Amazon CloudWatch metrics for Amazon Aurora</u> in the *Amazon Aurora User Guide*.

If you enabled Performance Insights for Aurora, Compute Optimizer also analyzes the following metrics of your Aurora DB instances. To enable Performance Insights for Aurora, see <u>Turning</u> Performance Insights on and off for Aurora in the *Amazon Aurora User Guide*.

Metric	Description
DBLoad	The number of active sessions for the database. Typically, you want the data for the average number of active sessions. In Performance Insights, this data is queried as db.load.avg.
os.memory.outOfMem oryKillCount	The number of OOM kills that happened over the last collection interval.

For more information about Aurora metrics, see Metrics reference for Amazon Aurora in the Amazon Aurora User Guide.

Aurora DB clusters

Compute Optimizer analyzes the following CloudWatch metrics of your Amazon Aurora DB clusters.

Metric	Description
VolumeReadIOPs	The number of billed read I/O operations from a cluster volume within a 5-minute interval.
VolumeWriteIOPs	The number of write disk I/O operations to the cluster volume, reported at 5-minute intervals.



Note

Compute Optimizer analyzes these metrics to estimate the I/O cost variability over the lookback period. The Aurora DB cluster storage recommendations are based on analyzing instance costs, storage costs, and I/O costs.

Using the AWS Compute Optimizer dashboard

Use the dashboard in the Compute Optimizer console to evaluate and prioritize the optimization opportunities for the supported resource types in your account. The dashboard displays the following information, which is refreshed daily and generated by analyzing the specifications and utilization metrics of your resources.

Topics

- Savings opportunity
- Performance improvement opportunity
- Optimization options per resource
- Viewing the dashboard

Savings opportunity

The savings opportunity section displays the total estimated monthly USD amount and percentage that you could save if you implement the Compute Optimizer recommendations for resources in your account. You can choose to display the estimated monthly savings by resource type or savings type. If you prefer to evaluate your resources for cost savings, then prioritize the resource type that has the greatest savings opportunity.


Using EC2 as an example, the estimated monthly savings and savings opportunity for individual EC2 instances are listed in the EC2 instances recommendations page under the **Estimated monthly** savings (after discounts), Estimated monthly savings (On-Demand), and Savings opportunity (%) columns. For more information, including how estimated monthly savings is calculated, see Estimated monthly savings and savings opportunity.



Important


If you enable Cost Optimization Hub in AWS Cost Explorer, Compute Optimizer uses Cost Optimization Hub data, which includes your specific pricing discounts, to generate your recommendations. If Cost Optimization Hub isn't enabled, Compute Optimizer uses Cost Explorer data and On-Demand pricing information to generate your recommendations. For more information, see Enabling Cost Explorer and Cost Optimization Hub in the in the AWS Cost Management User Guide.

Savings opportunity

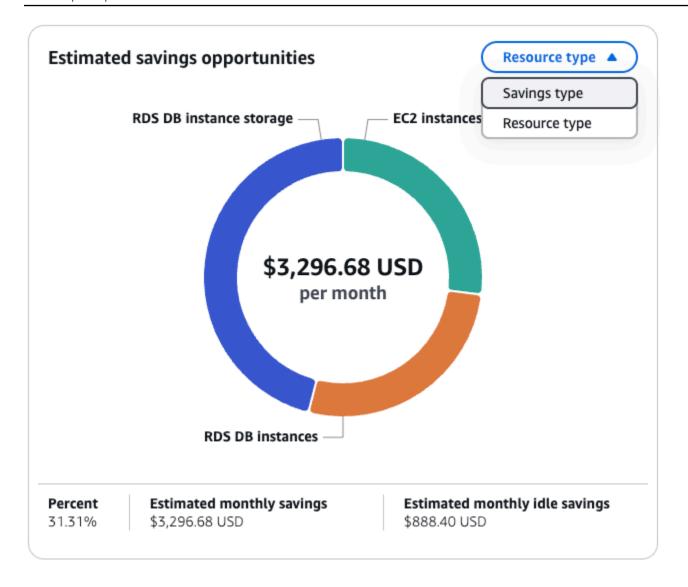

Performance improvement opportunity

The performance improvement opportunity section displays a count and percentage of the resources in your account that Compute Optimizer found to be at risk of not meeting your workload performance needs. It also displays the performance risk classifications per resource type. Resources can have a performance risk of high, medium, and very low. If you prefer to evaluate your resources for performance improvements, then prioritize the resource types that have a high performance risk.

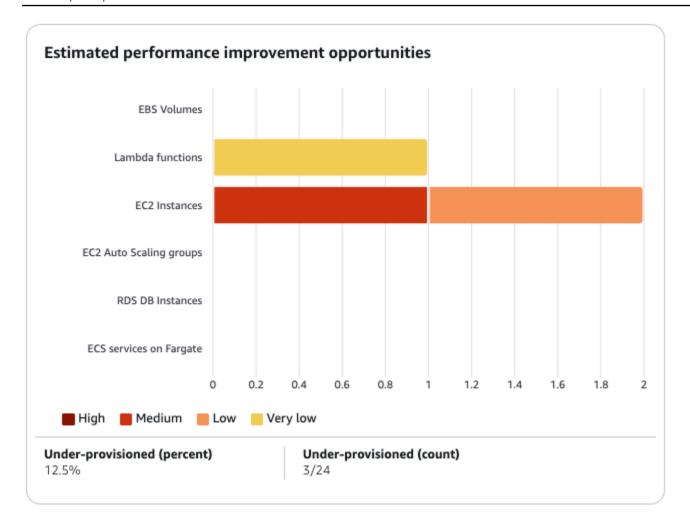

Optimization options per resource

This table in the dashboard provides a breakdown of optimization opportunities across your different resource types. It outlines the potential savings that you can achieve by identifying and addressing resources that are not optimized, idle, or inefficiently sized.

- The **Savings opportunity** column displays the potential cost savings that you can achieve through optimization. Note that the saving opportunity might not be equal to the sum of the idle, rightsize, and license savings figures.
- The **Optimized**, **Not optimized**, and **Idle** columns indicate the current state of your resources utilization, helping to identify areas for improvement.
- The **Idle savings**, **Rightsizing savings**, and **License savings** columns quantify the potential cost savings that you can achieve by addressing your idle clean-up opportunities, rightsizing your resources, and using our recommended license configurations.

You can use this table as a comprehensive guide to identify optimization opportunities, prioritize areas for improvement, and estimate the financial impact of various optimization strategies for your AWS resources.

Viewing the dashboard

Use the following procedure to view the dashboard and the optimization findings for your resources.

- Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.
- Choose **Dashboard** in the navigation pane.

By default, the dashboard displays an overview of optimization findings for AWS resources across all AWS Regions in the account that you're currently signed in to.

- 3. You can perform the following actions on the dashboard:
 - To view the optimization findings for resources in another account, choose **Account**, and then select a different account ID.

Note

The ability to view optimization findings for resources in other accounts is available only if you're signed in to a management account of an organization, you opted in all member accounts of the organization, and trusted access with Compute Optimizer is enabled. For more information, see Accounts supported by Compute Optimizer and Trusted access for AWS Organizations.

- To show or hide the savings opportunity and performance improvement opportunity sections of the dashboard, choose the gear icon, choose the sections that you want to show or hide, and choose **Apply**.
- To filter findings on the dashboard to one or more AWS Regions, enter the name of the Region in the Filter by one or more Regions text box, or choose one or more Regions in the drop-down list that appears.
- To clear the selected filters, choose **Clear filters** next to the filter.
- To view optimization recommendations, choose the **View recommendations** link for one of the resource types displayed, or choose the number of resources listed next to a findings

Viewing the dashboard 62

classification to view the resources for that classification. For more information, see <u>Viewing</u> resource recommendations.

Viewing the dashboard 63

Viewing resource recommendations

Recommendations for your AWS resources are displayed in the following pages of the AWS Compute Optimizer console.

- The **resources recommendations** page lists each of your running resources, along with their top recommendation generated by Compute Optimizer.
- The **resource details** page lists the top recommendation options for a specific resource, along with utilization metric graphs for the resource. You can access this page from the recommendations page.

The recommendations and resource details pages are available for each of the following AWS resources that are supported by Compute Optimizer:

- Amazon EC2 instances
- EC2 Auto Scaling groups
- Amazon EBS volumes
- AWS Lambda functions
- Amazon ECS services on Fargate
- Commercial software licenses
- Amazon RDS DB instances
- Idle resources

Viewing EC2 instance recommendations

AWS Compute Optimizer generates instance type recommendations for Amazon Elastic Compute Cloud (Amazon EC2) instances. Recommendations for your Amazon EC2 instances are displayed on the following pages of the Compute Optimizer console:

The EC2 instances recommendations page lists each of your current instances, their <u>finding</u> <u>classifications</u>, <u>finding reasons</u>, <u>platform differences</u>, current instance type, and current hourly price for the selected purchasing option. The top recommendation from Compute Optimizer is listed next to each of your instances. This recommendation includes the recommended instance type, the hourly price for the selected purchasing option, and the price difference between your

EC2 instance recommendations 64

current instance. Use the recommendations page to compare your current instances with their top recommendation. Doing this can help you to decide if you want to up-size or down-size your instances.

The EC2 instance details page lists up to three optimization recommendations for a specific
instance. You can access this page from the EC2 instances recommendations page. The page
specifically lists the specifications for each recommendation, their performance risk, and their
hourly prices for the selected purchasing option. The details page also displays utilization
metric graphs for the current instance, overlaid with the projected utilization metrics for the
recommendation options.

The recommendations are refreshed daily. These recommendations are generated by analyzing the specifications and utilization metrics of the current instance over a period of the last 14 days. Or, if you activate the <u>enhanced infrastructure metrics paid feature</u>, the recommendations are generated by analyzing a longer period of time. For more information, see <u>Metrics analyzed by AWS Compute Optimizer</u>.

Keep in mind that Compute Optimizer generates recommendations for EC2 instances that meet a specific set of requirements. Recommendations can take up to 24 hours to be generated. Moreover, sufficient metric data must be accumulated for recommendations to be generated. For more information, see Resource requirements.

Contents

- Finding classifications
- Finding reasons
- AWS Graviton-based instance recommendations
- Inferred workload types
- Migration effort
- Platform differences
- Estimated monthly savings and savings opportunity
- Performance risk
- Utilization graphs
- Accessing EC2 instance recommendations and details

EC2 instance recommendations 65

Finding classifications

The **Finding** column on the **EC2 instances recommendations** page provides a summary of how each of your instances performed during the analyzed period.

The following findings classifications apply to EC2 instances.

Classification	Description
Under-provisioned	An EC2 instance is considered under-provisioned when at least one specification of your instance, such as CPU, memory, or network, does not meet the performance requirements of your workload. Under-provisioned EC2 instances might lead to poor application performance.
Over-provisioned	An EC2 instance is considered over-provisioned when at least one specification of your instance, such as CPU, memory, or network, can be sized down while still meeting the performan ce requirements of your workload, and when no specification is under-provisioned. Over-provisioned EC2 instances might lead to unnecessary infrastructure cost.
Optimized	An EC2 instance is considered optimized when all specifications of your instance, such as CPU, memory, and network, meet the performance requirements of your workload, and the instance is not over-provisioned. For optimized instances, Compute Optimizer might sometimes recommend a new generation instance type.

Finding reasons

The **Finding reasons** column on the **EC2 instances recommendations** and **EC2 instance details** pages shows which specification of an instance is under-provisioned or over-provisioned.

The following finding reasons apply to instances:

Finding classifications 66

Finding reason	Description
CPU over-provisioned	The instance's CPU configuration can be sized down and also meet the performance requirements of your workload. This is identified by analyzing the CPUUtilization metric of the current instance during the look-back period.
CPU under-provisioned	The instance's CPU configuration doesn't meet the performan ce requirements of your workload and there's an alternative instance type that provides better CPU performance. This is identified by analyzing the CPUUtilization metric of the current instance during the look-back period.
Memory over-provisioned	The instance's memory configuration can be sized down while still meeting the performance requirements of your workload. This is identified by analyzing the memory utilization metric of the current instance during the look-back period.
	Memory utilization is analyzed only for resources with the unified CloudWatch agent installed. For more information, see <u>Enabling memory utilization with the</u> <u>Amazon CloudWatch Agent</u> .
Memory under-provisioned	The instance's memory configuration doesn't meet the performance requirements of your workload and there's an alternative instance type that provides better memory performance. This is identified by analyzing the memory utilization metric of the current instance during the look-back period.
GPU over-provisioned	The instance's GPU and GPU memory configurations can be sized down while still meeting the performance requireme nts of your workload. This is identified by analyzing the GPUUtilization and GPUMemoryUtilization metrics of the current instance during the look-back period.

Finding reason	Description
	The GPU utilization and GPU memory utilization metrics are analyzed only for resources with the unified CloudWatch agent installed. For more information, see Enabling NVIDIA GPU utilization with the CloudWatch agent .
GPU under-provisioned	The instance's GPU and GPU memory configurations don't meet the performance requirements of your workload and there's an alternative instance type that provides better memory performance. This is identified by analyzing the GPUUtilization and GPUMemoryUtilization metrics of the current instance during the look-back period.
EBS throughput over-prov isioned	The instance's EBS throughput configuration can be sized down and also meet the performance requirements of your workload. This is identified by analyzing the VolumeRea dBytes and VolumeWriteBytes metric of EBS volumes attached to the current instance during the look-back period.
EBS throughput under-pro visioned	The instance's EBS throughput configuration doesn't meet the performance requirements of your workload. And, there's an alternative instance type that provides better EBS throughpu t performance. This is identified by analyzing the VolumeRea dBytes and VolumeWriteBytes metric of EBS volumes that are attached to the current instance during the look-back period.
EBS IOPS over-provisioned	The instance's EBS IOPS configuration can be sized down and also meet the performance requirements of your workload. This is identified by analyzing the VolumeReadOps and VolumeWriteOps metrics of EBS volumes attached to the current instance during the look-back period.

Finding reason	Description
EBS IOPS under-provisioned	The instance's EBS IOPS configuration doesn't meet the performance requirements of your workload. And, there's an alternative instance type that provides better EBS IOPS performance. This is identified by analyzing the VolumeRea dOps and VolumeWriteOps metrics of EBS volumes attached to the current instance during the look-back period.
Network bandwidth over-provisioned	The instance's network bandwidth configuration can be sized down while still meeting the performance requirements of your workload. This is identified by analyzing the NetworkIn and NetworkOut metrics of the current instance during the look-back period.
Network bandwidth under- provisioned	The instance's network bandwidth configuration doesn't meet the performance requirements of your workload. And, there's an alternative instance type that provides better network bandwidth performance. This is identified by analyzing the NetworkIn and NetworkOut metrics of the current instance during the look-back period. This finding reason happens when the NetworkIn or NetworkOut performance of an instance is impacted.
Network PPS over-prov isioned	The instance's network PPS (packets per second) configuration can be sized down and also meet the performance requireme nts of your workload. This is identified by analyzing the NetworkPacketsIn and NetworkPacketsOut metrics of the current instance during the look-back period.
Network PPS under-pro visioned	The instance's network PPS (packets per second) configuration doesn't meet the performance requirements of your workload. And, there's an alternative instance type that provides better network PPS performance. This is identified by analyzing the NetworkPacketsIn and NetworkPacketsOut metrics of the current instance during the look-back period.

Finding reason	Description
Disk IOPS over-provisioned	The instance's disk IOPS configuration can be sized down and also meet the performance requirements of your workload. This is identified by analyzing the DiskReadOps and DiskWriteOps metrics of the current instance during the look-back period.
Disk IOPS under-provisioned	The instance's disk IOPS configuration doesn't meet the performance requirements of your workload. And, there's an alternative instance type that provides better disk IOPS performance. This is identified by analyzing the DiskReadO ps and DiskWriteOps metrics of the current instance during the look-back period.
Disk throughput over-prov isioned	The instance's disk throughput configuration can be sized down while still meeting the performance requirements of your workload. This is identified by analyzing the DiskReadB ytes and DiskWriteBytes metrics of the current instance during the look-back period.
Disk throughput under-pro visioned	The instance's disk throughput configuration doesn't meet the performance requirements of your workload. And, there's an alternative instance type that provides better disk throughput performance. This is identified by analyzing the DiskReadBytes and DiskWriteBytes metrics of the current instance during the look-back period.

Note


For more information about instance metrics, see <u>List the available CloudWatch metrics</u> for your instances in the *Amazon Elastic Compute Cloud User Guide*. For more information about EBS volume metrics, see <u>Amazon CloudWatch metrics for Amazon EBS</u> in the *Amazon Elastic Compute Cloud User Guide*.

You can change an instance's CPU, local disk, memory, or network specifications by changing the type of the instance. For example, you can change the instance type from C5 to C5n to help improve network performance. For more information, see Change the instance type guide for Windows in the EC2 User Guides.

You can change an EBS volume's IOPS or throughput specifications by using Amazon EBS Elastic Volumes. For more information, see <u>Amazon EBS Elastic Volumes</u> in the *Amazon Elastic Compute Cloud User Guide*.

AWS Graviton-based instance recommendations

When viewing Amazon EC2 instance recommendations, you can view the price and performance impact of running your workload on AWS Graviton-based instances. To do so, choose **Graviton** (aws-arm64) in the **CPU architecture preference** dropdown. Otherwise, choose **Current** to view recommendations that are based on the same CPU vendor and architecture as the current instance.

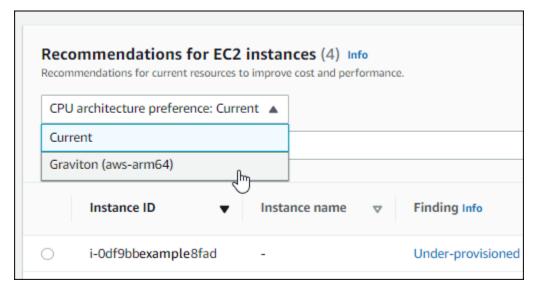



The Current price, Recommended price, Price difference, Price difference (%), and Estimated monthly savings columns are updated to provide a price comparison between the current instance type and the instance type of the selected CPU architecture preference. For example, if you choose Graviton (aws-arm64), prices are compared between the current instance type and the recommended Graviton-based instance type.

Inferred workload types

The Inferred workload types column on the EC2 instances recommendations page lists the applications that might be running on the instance as inferred by Compute Optimizer. This column does this by analyzing the attributes of your instances. These attributes include the instance name, tags, and configuration. Compute Optimizer can currently infer if your instances are running Amazon EMR, Apache Cassandra, Apache Hadoop, Memcached, NGINX, PostgreSQL, Redis, Kafka, or SQLServer. By inferring the applications that run on your instances, Compute Optimizer can identify the effort to migrate your workloads from x86-based instance types to Arm-based AWS Graviton instances types. For more information, see Migration effort in the next section of this quide.



Note

You can't infer the SQLServer application in the Middle East (Bahrain), Africa (Cape Town), Asia Pacific (Hong Kong), Europe (Milan), and Asia Pacific (Jakarta) Regions.

Migration effort

The Migration effort column on the EC2 Auto Scaling groups recommendations and EC2 Auto Scaling groups details pages lists the level of effort that might be required to migrate from the current instance type to the recommended instance type. The following shows examples of the different levels of migration effort.

- Very low The recommended instance type has the same CPU architecture as the current instance type.
- Low Amazon EMR is the inferred workload type and an AWS Graviton instance type is recommended
- Medium A workload type can't be inferred but an AWS Graviton instance type is recommended.
- **High** The recommended instance type has different CPU architecture from the current instance type, and the workload has no known compatible version on the recommended CPU architecture.

Inferred workload types 72

For more information about migrating from x86-based instance types to Arm-based AWS Graviton instances type, see <u>Considerations when transitioning workloads to AWS Graviton2 based Amazon</u> EC2 instances in the *AWS Graviton Getting Starged GitHub*.

Platform differences

The **Platform differences** column on the **EC2 instance details** page describes the differences between the current instance and the recommended instance type. Consider the configuration differences before migrating your workloads from the current instance to the recommended instance type.

The following platform differences apply to EC2 instances:

Platform difference	Description
Architecture	The CPU architecture of the recommended instance type is different than that of the current instance type. For example, the recommended instance type might use an Arm CPU architecture and the current instance type might use a different one, such as x86. Before migrating, consider recompiling the software on your instance for the new architecture. Alternatively, you might switch to an Amazon Machine Image (AMI) that supports the new architecture. For more information about the CPU architecture for each instance type, see Amazon EC2 Instance Types .
Hypervisor	The hypervisor of the recommended instance type is different than that of the current instance. For example, the recommend ed instance type might use a Nitro hypervisor and the current instance might use a Xen hypervisor. For information about the differences that you can consider between these hypervisors, see Nitro Hypervisor section of the Amazon EC2 FAQs. For more information, see Instances built on the Nitro System in the Amazon EC2 User Guide for Linux, or Instances built on the Nitro System in the Amazon EC2 User Guide for Windows.
Instance store availability	The recommended instance type doesn't support instance store volumes, but the current instance does. Before migrating

Platform differences 73

Platform difference	Description
	, you might need to back up the data on your instance store volumes if you want to preserve them. For more informati on, see How do I back up an instance store volume on my Amazon EC2 instance to Amazon EBS? in the Amazon EC2 instance Networkin g and storage features and Amazon EC2 instance store in the Amazon EC2 User Guide for Linux , or see Networking and Storage features and Amazon EC2 instance store in the Amazon EC2 User Guide for Windows .
Network interface	The network interface of the recommended instance type is different than that of the current instance. For example, the recommended instance type might use enhanced networkin g and the current instance might not. To enable enhanced networking for the recommended instance type, install the Elastic Network Adapter (ENA) driver or the Intel 82599 Virtual Function driver. For more information, see Networking and storage features and Enhanced networking on Linux in the Amazon EC2 User Guide for Linux , or Networking and storage features and Enhanced networking on Windows in the Amazon EC2 User Guide for Windows .
Storage interface	The storage interface of the recommended instance type is different than that of the current instance. For example, the recommended instance type uses an NVMe storage interface and the current instance doesn't such this interface. To access NVMe volumes for the recommended instance type, install or upgrade the NVMe driver. For more information, see Networking and storage features and Amazon EBS and NVMe on Linux instances in the Amazon EC2 User Guide for Linux, or Networking and storage features and Amazon EBS and NVMe on Windows instances in the Amazon EC2 User Guide for Windows.

Platform differences 74

Platform difference	Description
Virtualization type	The recommended instance type uses the hardware virtual machine (HVM) virtualization type and the current instance uses the paravirtual (PV) virtualization type. For more information about the differences between these virtualization types, see Linux AMI virtualization types in the Amazon EC2 User Guide for Linux, or Windows AMI virtualization types in the Amazon EC2 User Guide for Windows.

Estimated monthly savings and savings opportunity

Estimated monthly savings (after discounts)

This column lists the approximate monthly cost savings that you experience by migrating your workloads from the current instance type to the recommended instance type under the Savings Plans and Reserved Instances pricing models. To receive recommendations with Savings Plans and Reserved Instances discounts, the savings estimation mode preference needs to be activated. For more information, see Savings estimation mode.



Note

If you don't activate the savings estimation mode preference, this column displays the default On-Demand pricing discount information.

Estimated monthly savings (On-Demand)

This column lists the approximate monthly cost savings that you experience by migrating your workloads from the current instance type to the recommended instance type under the On-Demand pricing model.

Savings opportunity (%)

This column lists the percentage difference between the price of the current instance and the price of the recommended instance type. If savings estimation mode is activated, Compute Optimizer analyzes the Savings Plans and Reserved Instances pricing discounts to generate the savings

opportunity percentage. If savings estimation mode isn't activated, Compute Optimizer only uses On-Demand pricing information. For more information, see Savings estimation mode.

Important

If you enable Cost Optimization Hub in AWS Cost Explorer, Compute Optimizer uses Cost Optimization Hub data, which includes your specific pricing discounts, to generate your recommendations. If Cost Optimization Hub isn't enabled, Compute Optimizer uses Cost Explorer data and On-Demand pricing information to generate your recommendations. For more information, see Enabling Cost Explorer and Cost Optimization Hub in the in the AWS Cost Management User Guide.

Estimated monthly savings calculation

For each recommendation, the cost to operate a new instance using the recommended instance type is calculated. Estimated monthly savings are calculated based on the number of running hours for the current instance and the difference in rates between the current instance type and the recommended instance type. The estimated monthly savings for instances that are displayed on the Compute Optimizer dashboard is a sum of the estimated monthly savings for all overprovisioned instances in the account.

Performance risk

The performance risk columns on the EC2 instance details page and the EC2 instance **recommendations** page define the likelihood of the current and recommended instance type not meeting your workload requirements. Compute Optimizer calculates an individual performance risk score for each specification of the current and recommended instance. This includes specifications such as CPU, memory, EBS throughput, EBS IOPS, disk throughput, disk IOPS, network throughput, and network PPS. The performance risk of the current and recommended instance is calculated as the maximum performance risk score across the analyzed resource specifications.

The values range from very low, low, medium, high, and very high. A very low performance risk means that the instance type is predicted to always provide enough capability. The higher the performance risk means that you should validate whether the instance type meets the performance requirements of your workload before migrating your resource. Decide whether to optimize for performance improvement, for cost reduction, or for a combination of these two.

Performance risk 76

For more information, see Changing the Instance Type in the Amazon Elastic Compute Cloud User Guide.



Note

In the Compute Optimizer API, the AWS Command Line Interface (AWS CLI), and the AWS SDKs, performance risk is measured on a scale of 0 (very low) to 4 (very high).

Utilization graphs

The EC2 instance details page displays utilization metric graphs for your current instance. The graphs display data for the analyzed period. Compute Optimizer uses the maximum utilization point within each 5 minute time interval to generate EC2 instance recommendations.

You can change the graphs to display data for the last 24 hours, 3 days, 1 week, or 2 weeks. If you activate the enhanced infrastructure metrics paidfeature, you can view 3 months. You can also change the statistic of the graphs between average and maximum.



Note

For periods of time when your instances are in a stopped state, the utilization graphs show a value of 0.

The following utilization graphs are displayed on the details page:

Graph name	Description
CPU utilization (percent)	The percentage of allocated EC2 compute units used by the instance.
	The CPU utilization graph includes a comparison of the CPU utilization data of your current instance type against that of the selected recommended instance type. The comparison shows you what the CPU utilizati on is if you use the selected recommended

Graph name Description instance type during the analyzed period. This comparison can help you to identify if the recommended instance type is within your workload's performance threshold. Note The **Burstable baseline** only displays for T-instances. You can use this baseline performance to learn how your CPU utilization relates to the baseline utilization of the specific T-instance. For more information, see Key concepts and definitions for burstable performance instances in the Amazon EC2 User Guide for Linux Instances.

Graph name	Description
Memory utilization (percent)	The percentage of memory allocated by applications and the operating system as used.
	The memory utilization graph includes a comparison of the memory utilization data of your current instance type against that of the selected recommended instance type. The comparison shows you what the memory utilization is if you use the selected recommended instance type during the analyzed period. This comparison can help you to identify if the recommended instance type is within your workload's performance threshold.
	The memory utilization graph is populated only for instances that have the unified CloudWatch agent installed on them. For more informati on, see Collecting Metrics and Logs from Amazon EC2 Instances and On-Premises Servers with the CloudWatch Agent in the Amazon CloudWatch User Guide.
Network in (MiB/second)	The number of mebibytes (MiB) per second received on all network interfaces by the instance.
Network out (MiB/second)	The number of mebibytes (MiB) per second sent out on all network interfaces by the instance.

Graph name	Description
Network packets in (per second)	The number of packets received by the instance on all network interfaces.
Network packets out (per second)	The number of packets sent out by the instance on all network interfaces.
Disk read operations (per second)	The completed read operations per second from the instance store volumes of the instance.
Disk write operations (per second)	The completed write operations per second from the instance store volumes of the instance.
Disk read bandwidth (MiB/second)	The read mebibytes (MiB) per second from the instance store volumes of the instance.
Disk write bandwidth (MiB/second)	The write mebibytes (MiB) per second from the instance store volumes of the instance.
EBS read operations (per second)	The completed read operations per second from all EBS volumes attached to the instance.
	For Xen instances, data is reported only when there is read activity on the volume.
EBS write operations (per second)	The completed write operations per second to all EBS volumes attached to the instance.
	For Xen instances, data is reported only when there is write activity on the volume.
EBS read bandwidth (MiB/second)	The read mebibytes (MiB) per second from all EBS volumes attached to the instance.
EBS write bandwidth (MiB/second)	The written mebibytes (MiB) per second to all EBS volumes attached to the instance.

Accessing EC2 instance recommendations and details

You can use one of the following procedures to access either the **EC2 instances recommendations** or the **EC2 instance details** pages in the AWS Console.

On the **EC2 instances recommendations** page you can view the recommendations for your current instances. On the **EC2 instance details** page you can view the details of a specific instance and its recommendations.

Procedures

Accessing EC2 instance recommendations page

To access the EC2 instances recommendations page

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose **EC2 instances** in the navigation pane.

The recommendations page lists the specifications and finding classifications of your current instances and the specifications of the recommended instances. The current instances listed are from the AWS Region that is currently selected, in the selected account.

- 3. You can perform the following actions on the recommendations page:
 - View the price and performance impact of running your workload on AWS Graviton-based instances. To do this, choose **Graviton (aws-arm64)** in the **CPU architecture preference** dropdown list. Otherwise, the **Current** (default) option displays recommendations that are based on the same CPU vendor and architecture as the current instance.
 - Filter recommendations by AWS Regions, Findings, Finding reasons, or Inferred Workload Type. To do this, first select the **Filter by one or more properties** text box. Then, choose the property and a value in the dropdown list that appears.
 - Filter your recommendations by tags. To do this, first select the **Tag key** or **Tag value** text box. Then, enter the key or value that you want to filter your EC2 instance recommendations by.

For example, to find all the recommendations that have a tag with the key of Owner and the value of TeamA, specify tag: Owner for the filter name and TeamA for the filter value.

· View recommendations for instances in another account. To do this, choose Account, and then select a different account ID.



(i) Note

If you're signed in to a management account of an organization and trusted access with Compute Optimizer is enabled, you can view recommendations for resources in other accounts. For more information, see Accounts supported by Compute Optimizer and Trusted access for AWS Organizations.

- Clear the selected filters. To do this, choose **Clear filters** next to the filter.
- Access the EC2 instance details page for a specific instance. To do this, choose the finding classification listed next to the instance that you want to access.

Accessing EC2 instance details page

To access the EC2 instance details page

- Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.
- 2. Choose **EC2** instances in the navigation pane.
- 3. Choose the finding classification listed next to the instance that you want to view detailed information for.

The details page lists up to three optimization recommendations for the instance that you chose. The page lists the specifications of your current instance, the specifications and performance risks of the recommended instances, and utilization metric graphs.

- You can perform the following actions on the details page:
 - To view the price and performance impact of running your workload on AWS Graviton-based instances, choose **Graviton (aws-arm64)** in the **CPU architecture preference** dropdown. Otherwise, the **Current** (default) option displays recommendations that are based on the same CPU vendor and architecture as the current instance.
 - Activate the enhanced infrastructure metrics paid feature to extend the metrics analysis look-back period for the EC2 instance you're viewing up to three months (compared to the 14-day default). For more information, see Enhanced infrastructure metrics.

• Choose a recommendation option to view the utilization comparison between your current instance and a recommended instance.

The utilization metric graphs for your current instance are displayed at the bottom of the page. The solid blue line is the utilization of your current instance. The dotted orange line is the projected utilization of the selected recommended instance if you use that instance during the analyzed period. The dotted orange line is displayed in the CPU utilization and memory utilization graphs.

To change the time range of the graphs, choose Time Range, and then choose Last 24
hours, Last 3 days, Last week, or Last 2 weeks. If you activate the enhanced infrastructure
metrics recommendation preference, you can also choose Last 3 months.

Choosing a shorter time range displays the data points at a higher granularity, which provides a higher level of detail.

 To change the statistic value of the graphs, choose Statistics, and then choose Average or Maximum.

You can use this option to determine the typical instance utilization of your workload over time. To view the highest value observed during the specified period, change the selection to **Maximum**. This way, you can determine the peak instance usage of your workload over time.

Viewing EC2 Auto Scaling group recommendations

AWS Compute Optimizer generates instance type recommendations for Amazon EC2 Auto Scaling groups. Recommendations for your EC2 Auto Scaling groups are displayed on the following pages of the AWS Compute Optimizer console.

EC2 Auto Scaling group recommendations

This page lists each of your current EC2 Auto Scaling groups, their finding classifications, current instance type(s), current hourly price for the selected purchasing option, and current configuration. The top recommendation from Compute Optimizer is listed next to each of your EC2 Auto Scaling groups, and it includes the recommended instance type, the hourly price for the selected purchasing option, and the price difference between your current instance type(s) and the recommendation. Use the recommendations page to compare the current instance

type(s) of your EC2 Auto Scaling groups with our top recommendation, which can help you to decide if you should upsize or downsize your instances.

EC2 Auto Scaling group details

Depending on the specific EC2 Auto Scaling group, this page provides you with rightsizing recommendations and/or recommendations to scale in an idle group. It lists the specifications for each rightsizing recommendation such as the performance risk and hourly prices for the selected purchasing option. The details page also displays utilization metric graphs that can be used to compare the current EC2 Auto Scaling group with the projected utilization metrics for the recommendation option(s).

The recommendations are refreshed daily. They're generated by analyzing the specifications and utilization metrics of the current EC2 Auto Scaling group over the default lookback period of 14 days or a 32-day lookback period. You can extend the lookback period to 93 days if you enable enhanced infrastructure metrics. For more information, see Enhanced infrastructure metrics, Rightsizing recommendation preferences, and Metrics analyzed by AWS Compute Optimizer.

Keep in mind that Compute Optimizer generates recommendations for EC2 Auto Scaling groups that meet a specific set of requirements, recommendations could take up to 24 hours to be generated, and sufficient metric data must be accumulated. For more information, see Resource requirements.

Important

If you enable Cost Optimization Hub in AWS Cost Explorer, Compute Optimizer uses Cost Optimization Hub data, which includes your specific pricing discounts, to generate your recommendations. If Cost Optimization Hub isn't enabled, Compute Optimizer uses Cost Explorer data and On-Demand pricing information to generate your recommendations. For more information, see Enabling Cost Explorer and Cost Optimization Hub in the in the AWS Cost Management User Guide.

Contents

- How an EC2 Auto Scaling group recommendation is generated
- Finding classifications
- Allocation strategy

- Estimated monthly savings and savings opportunity
- Idle
- AWS Graviton-based instance recommendations
- Inferred workload types
- Migration effort
- Performance risk
- · Utilization graphs
- Accessing EC2 Auto Scaling group recommendations and details

How an EC2 Auto Scaling group recommendation is generated

AWS Compute Optimizer generates recommendations for EC2 Auto Scaling groups using a threestep evaluation process designed to optimize cost and performance:

1. Assessing whether an EC2 Auto Scaling group is idle

Compute Optimizer assesses whether your EC2 Auto Scaling group is idle by analyzing its resource utilization patterns over the lookback period. If all instances in an EC2 Auto Scaling group meet the idle criteria, Compute Optimizer finds your group to be idle and estimates the potential savings of scaling in the idle group. For more information, see Idle criteria per resource.

2. Assessing the scalability of an EC2 Auto Scaling group

Compute Optimizer assesses the instance capacity settings and scaling policies to determine whether your EC2 Auto Scaling group is used to maintain a fixed pool of instances (with no scaling policies or disabled scaling policies), scale dynamically to meet your workload demands (using target tracking, predictive scaling, simple scaling, or step scaling policies based on CPU utilization), or follow a fixed schedule of scaling events (with scheduled scaling policies).

3. Identifying rightsizing opportunities

Compute Optimizer analyzes the resource utilization and current configuration of your EC2 Auto Scaling group, including allocation strategy settings, scaling policies, instance types, pricing, and instance capacity to find suitable rightsizing opportunities.

 For EC2 Auto Scaling groups maintaining a fixed pool of instances, Compute Optimizer recommends instance types that meet your workload requirements while maintaining the current instance count. This can improve your workload performance and provide cost savings.

 For EC2 Auto Scaling groups that scale dynamically based on demand, Compute Optimizer recommends upgrading to newer instance generations that can provide increased savings. If memory metrics are enabled, it can also suggest memory downsizing opportunities for additional savings.

 For EC2 Auto Scaling groups that follow a fixed schedule of scaling events, Compute Optimizer recommends instance types that can provide increased savings while meeting your resource workload requirements based on scheduled scaled capacity. This ensures that the recommendations align with the specific scaling strategies and workload demands of each group.



Note

For rightsizing recommendations, Compute Optimizer doesn't provide recommendations to modify scaling policy or instance capacity settings.

Finding classifications

The **Finding** column on the **EC2 Auto Scaling groups recommendations** page provides a summary of how each of your EC2 Auto Scaling groups performed during the lookback period.

The following findings classifications apply to EC2 Auto Scaling groups.

Classification	Description
Not optimized	EC2 Auto Scaling groups that maintain a fixed pool of instances are considered not optimized when the group is either oversized or running workloads that might cause performance issues. EC2 Auto Scaling groups that scale dynamically or follow a fixed schedule of scaling events are considered not optimized when there are other instance types that can meet the demand at a lower cost.
Optimized	An EC2 Auto Scaling group is considered optimized when all specifications of your group, such as CPU, memory,

Finding classifications

Classification	Description
	and network, meet the performance requirements of your workload. For optimized groups, Compute Optimizer might recommend a new generation instance type.

Allocation strategy

The allocation strategy columns on the EC2 Auto Scaling groups recommendations and details pages displays the current and recommended allocation strategy for the EC2 Auto Scaling group. The allocation strategy sets the order in which the EC2 Auto Scaling group deploys its mixed instance types. Compute Optimizer can find an allocation strategy to be one of the following:

- Prioritized The EC2 Auto Scaling group prioritizes the instance types based on the order you
 have listed in your instance type requirements.
- **Lowest-price** The EC2 Auto Scaling group automatically deploys the lowest priced instance types in each Availability Zone based on the current On-Demand price.
- No allocation strategy You have not set an allocation strategy for your EC2 Auto Scaling group.
- **Not applicable** An allocation strategy isn't applicable to an EC2 Auto Scaling group with a single instance type.

Compute Optimizer recommends using a **Prioritized** allocation strategy and prioritize our recommended instance types above your current instance types within your instance type requirements. Prioritizing Compute Optimizer's recommendation enables your EC2 Auto Scaling group to deploy instance types that optimize both cost and performance. We also recommended that you keep your current instance types within your instance type requirements to make sure there is sufficient capacity to support your workloads.

You can update your EC2 Auto Scaling groups with our recommended instance types by using an instance refresh. For more information, see <u>Use an instance refresh to update instances in an Auto Scaling group in the Amazon EC2 Auto Scaling</u> user guide.

For more information about allocation strategies, see <u>Allocation strategies for multiple instance</u> types in the *Amazon EC2 Auto Scaling* user guide.

Allocation strategy 87

Estimated monthly savings and savings opportunity

Estimated monthly savings (after discounts)

This column lists the estimated monthly savings for the EC2 Auto Scaling group if you had used the recommended instance type(s) during the lookback period. After discount savings consider any Reserved Instances or Savings Plans pricing models that are active in your accounts. To receive recommendations with Savings Plans and Reserved Instances discounts, the savings estimation mode preference needs to be activated. For more information, see Savings estimation mode.



Note

If you don't activate the savings estimation mode preference, this column displays the default On-Demand pricing information.

Estimated monthly savings (On-Demand)

This column lists the approximate monthly cost savings for the EC2 Auto Scaling group if you had used Compute Optimizer's recommendation during the lookback period, and purchased under the On-Demand instance pricing.

Savings opportunity (%)

This column lists the estimated monthly savings percentage of the current monthly cost that you can save by adopting the recommended instance type(s) for your EC2 Auto Scaling group. If savings estimation mode is activated, Compute Optimizer analyzes any Reserved Instances or Savings Plans pricing models that are active in your accounts to generate the savings opportunity percentage. If savings estimation mode isn't activated, Compute Optimizer only uses On-Demand pricing information. For more information, see Savings estimation mode.

Estimated monthly savings calculation

For each recommendation, we calculate the cost to operate a new instance using the recommended instance type. Estimated monthly savings are calculated based on the number of running hours for current instances in the EC2 Auto Scaling group and the difference in rates between the current instance type and the recommended instance type. The estimated monthly savings for EC2 Auto Scaling groups displayed on the Compute Optimizer dashboard is a sum of the estimated monthly savings for all over-provisioned instances in EC2 Auto Scaling groups, in the account.

Idle

The Idle column on the EC2 Auto Scaling groups recommendations page displays whether your EC2 Auto Scaling group is idle or not.

Idle criteria for EC2 Auto Scaling groups — The group has no instances with more than 5% peak CPU utilization or 5 MB/day network utilization over the 14-day lookback period.

Idle criteria for EC2 Auto Scaling groups that use G or P instance types — If the group's instances meet the following criteria over the 14-day lookback period:

- GPU isn't actively working for more than 99% of the lookback period
- GPU encoder isn't used for 99% or more of the instance's runtime
- GPU memory usage at instance level is less than 5%
- CPU maximum utilization is less than 5%
- Network utilization is less than 5 MB/day

AWS Graviton-based instance recommendations

When viewing EC2 Auto Scaling group recommendations, you can view the price and performance impact of running your workload on AWS Graviton-based instances. To do so, choose Graviton (aws-arm64) in the CPU architecture preference dropdown. Otherwise, choose Current to view recommendations that are based on the same CPU vendor and architecture as the current instance.



Note

The Current price, Recommended price, Price difference, Price difference (%), and Estimated monthly savings columns are updated to provide a price comparison between the current instance type and the instance type of the selected CPU architecture preference. For example, if you choose Graviton (aws-arm64), prices are compared between the current instance type and the recommended Graviton-based instance type.

Inferred workload types

The Inferred workload types column on the EC2 Auto Scaling groups recommendations page lists the applications that might be running on instances in the EC2 Auto Scaling group as inferred

Idle 89

by Compute Optimizer. It does this by analyzing the attributes of instances in the EC2 Auto Scaling group, such as the instance name, tags, and configuration. Compute Optimizer can currently infer if your instances are running Amazon EMR, Apache Cassandra, Apache Hadoop, Memcached, NGINX, PostgreSQL, Redis, Kafka, or SQLServer. By inferring the applications running on your instances, Compute Optimizer is able to identify the effort to migrate your workloads from x86-based instance types to Arm-based AWS Graviton instances types. For more information, see Migration effort.



Note

You can't infer the SQLServer application in the Middle East (Bahrain), Africa (Cape Town), Asia Pacific (Hong Kong), Europe (Milan), and Asia Pacific (Jakarta) Regions.

Migration effort

The Migration effort column on the EC2 Auto Scaling groups recommendations and EC2 Auto Scaling groups details pages lists the level of effort that might be required to migrate from the current instance type to the recommended instance type. The following shows examples of the different levels of migration effort.

- Very low The recommended instance type has the same CPU architecture as the current instance type.
- Low Amazon EMR is the inferred workload type and an AWS Graviton instance type is recommended
- **Medium** A workload type can't be inferred but an AWS Graviton instance type is recommended.
- **High** The recommended instance type has different CPU architecture from the current instance type, and the workload has no known compatible version on the recommended CPU architecture.

For more information about migrating from x86-based instance types to Arm-based AWS Graviton instances type, see Considerations when transitioning workloads to AWS Graviton2 based Amazon EC2 instances in the AWS Graviton Getting Started GitHub.

Migration effort

Performance risk

The performance risk columns on the EC2 Auto Scaling groups details page and the EC2 Auto **Scaling groups recommendations** page define the likelihood of the current and recommended instance type(s) running in your EC2 Auto Scaling group not meeting your workload requirements. Compute Optimizer calculates an individual performance risk score for each specification of the EC2 Auto Scaling group, including CPU, memory, EBS throughput, EBS IOPS, disk throughput, disk IOPS, network throughput, and network PPS. The performance risk of the current and recommended EC2 Auto Scaling group is calculated as the maximum performance risk score across the analyzed resource specifications.

The values range from very low, low, medium, high, and very high. A very low performance risk means that the instance type(s) is predicted to always provide enough capability. A higher the performance risk means that you should validate whether the instance type(s) running in your EC2 Auto Scaling group will meet the performance requirements of your workload before migrating your resource. Decide whether to optimize for performance improvement, for cost reduction, or for a combination of these two. For more information, see Changing the Instance Type in the Amazon Elastic Compute Cloud User Guide.



Note

In the Compute Optimizer API, the AWS Command Line Interface (AWS CLI), and AWS SDKs, performance risk is measured on a scale of 0 (very low) to 4 (very high).

Utilization graphs

The **EC2 Auto Scaling group details** page displays utilization metric graphs for current instances in the group. The graphs display data for the analysis period. Compute Optimizer uses the maximum utilization point within each five-minute time interval to generate EC2 Auto Scaling group recommendations.

You can change the graphs to display data for the last 24 hours, three days, one week, or two weeks. If you activate the enhanced infrastructure metrics paid feature, you can view data from the last three months.

The following utilization graphs are displayed on the details page:

Performance risk 91

Graph name	Description
Average CPU utilization (percent)	The average percentage of allocated EC2 compute units used by instances in the EC2 Auto Scaling group.
Average network in (MiB/second)	The number of mebibytes (MiB) per second received on all network interfaces by instances in the EC2 Auto Scaling group.
Average network out (MiB/second)	The number of mebibytes (MiB) per second sent out on all network interfaces by instances in the EC2 Auto Scaling group.
Instance capacity	This is the number of running instances with an EC2 Auto Scaling group at any given time.

Accessing EC2 Auto Scaling group recommendations and details

You can use one of the following procedures to access either the **EC2 Auto Scaling groups** recommendations or the **EC2 Auto Scaling group details** pages in the AWS Console.

On the **EC2 Auto Scaling groups recommendations** page you can view the recommendations for your current EC2 Auto Scaling groups. On the **EC2 Auto Scaling group details** page you can view the details of a specific group and its recommendations.

Procedures

Accessing EC2 Auto Scaling group recommendations page

To access the EC2 Auto Scaling group recommendations page

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose **EC2 Auto Scaling groups** in the navigation pane.

The recommendations page lists the specifications and finding classifications of your EC2 Auto Scaling groups, along with the specifications of the recommended groups. The current EC2

Auto Scaling groups listed are from the AWS Region that is currently selected, in the selected account.

- You can perform the following actions on the recommendations page:
 - View the price and performance impact of running your workload on AWS Graviton-based instances. To do this, choose Graviton (aws-arm64) in the CPU architecture preference dropdown list. Otherwise, the **Current** (default) option displays recommendations that are based on the same CPU vendor and architecture as the current instance.
 - Filter recommendations by AWS Regions, Findings, or Finding reasons. To do this, first select the Filter by one or more properties text box. Then, choose the property and a value in the dropdown list that appears.
 - View recommendations for instances in another account. To do this, choose Account, and then select a different account ID.



Note

If you're signed in to a management account of an organization and trusted access with Compute Optimizer is enabled, you can view recommendations for resources in other accounts. For more information, see Accounts supported by Compute Optimizer and Trusted access for AWS Organizations.

- Clear the selected filters. To do this, choose **Clear filters** next to the filter.
- Access the EC2 Auto Scaling group details page for a specific EC2 Auto Scaling group. To do this, choose the finding classification listed next to the desired group.

Accessing EC2 Auto Scaling group details page

To access the EC2 Auto Scaling group details page

- Open the Compute Optimizer console at https://console.aws.amazon.com/compute-1. optimizer/.
- Choose **EC2 Auto Scaling groups** in the navigation pane. 2.
- To view the details of a recommendation, select an EC2 Auto Scaling group and choose View details. Or, choose the EC2 Auto Scaling group link.

The details page lists up to three optimization recommendations for the EC2 Auto Scaling group that you chose. It lists the specifications of current instances in the EC2 Auto Scaling

group, the specifications and performance risks of the recommended instances, and utilization metric graphs.

- 4. You can perform the following actions on the details page:
 - To view the price and performance impact of running your workload on AWS Graviton-based instances, choose Graviton (aws-arm64) in the CPU architecture preference dropdown.
 Otherwise, the Current (default) option displays recommendations that are based on the same CPU vendor and architecture as the current instance.
 - Activate the enhanced infrastructure metrics paid feature to extend the metrics analysis look-back period for the Auto Scaling group you're viewing up to three months (compared to the 14-day default). For more information, see Enhanced infrastructure metrics.
 - The utilization metric graphs for your current instance are displayed at the bottom of the page. The solid blue line is the utilization of current instances in the Auto Scaling group.
 - To change the time range of the graphs, choose Time Range, and then choose Last 24 hours, Last 3 days, Last week, or Last 2 weeks. If you activate the enhanced infrastructure metrics recommendation preference, you can also choose Last 3 months. Choosing a shorter time range displays the data points at a higher granularity, which provides a higher level of detail.

Viewing Amazon EBS volume recommendations

AWS Compute Optimizer generates volume type, volume size, IOPS, and throughput recommendations for Amazon Elastic Block Store (Amazon EBS) volumes. Recommendations for your EBS volumes are displayed in the following pages of the AWS Compute Optimizer console:

- The EBS volumes recommendations page lists each of your current volumes, their finding classifications, their current volume type, and their current hourly price. The top recommendation from Compute Optimizer is listed next to each of your volumes, and it includes the recommended volume type, recommended volume size, recommended IOPS, the monthly price of the recommendation, and the price difference between your current volume and the recommendation. Use the recommendations page to compare your current volumes with their top recommendation, which can help you to decide if you should up-size or down-size your volume.
- The **EBS volume details** page, which you can access from the EBS volume recommendations page, lists up to three optimization recommendations for a specific volume. It lists the

EBS volume recommendations 94

specifications for each recommendation, their <u>performance risk</u>, and their monthly prices. The details page also displays utilization metric graphs for the current volume.

The recommendations are refreshed daily. They're generated by analyzing the specifications and utilization metrics of the current volume over a period of the last 14 days. For more information, see Metrics analyzed by AWS Compute Optimizer.

Keep in mind that Compute Optimizer generates recommendations for EBS volumes that meet a specific set of requirements, recommendations could take up to 24 hours to be generated, and sufficient metric data must be accumulated. For more information, see Resource requirements.

Contents

- Finding classifications
- Estimated monthly savings and savings opportunity
- Performance risk
- Utilization graphs
- Accessing EBS volumes recommendations and details

Finding classifications

The **Finding** column on the **EBS volumes recommendations** page provides a summary of how each of your volumes performed during the analyzed period.

The following findings classifications apply to EBS volumes.

Classification	Description
Not optimized	An EBS volume is considered not optimized when Compute Optimizer has identified a volume type, volume size, or IOPS specification that can provide better performance or cost for your workload.
Optimized	An EBS volume is considered optimized when Compute Optimizer determines that the volume is correctly provision ed to run your workload, based on the chosen volume type, volume size, and IOPS specification. For optimized resources

Finding classifications 95

Classification	Description
	, Compute Optimizer might sometimes recommend a new generation volume type.

Estimated monthly savings and savings opportunity

Estimated monthly savings (after discounts)

This column lists the approximate monthly cost savings that you experience by migrating your EBS volumes from the current specifications to the recommended specifications under specific discounts. To receive recommendations with specific discounts, the savings estimation mode preference needs to be activated. For more information, see Savings estimation mode.



Note

If you don't activate the savings estimation mode preference, this column displays the default On-Demand pricing discount information.

Estimated monthly savings (On-Demand)

This column lists the approximate monthly cost savings that you will experience by migrating your EBS volumes from the current specifications to the recommended specifications.

Savings opportunity (%)

This column lists the percentage difference between the price of the current EBS volume specification and the price of the recommended volume specification. If savings estimation mode is activated, Compute Optimizer analyzes specific discounts to generate the savings opportunity percentage. If savings estimation mode isn't activated, Compute Optimizer only uses On-Demand pricing information. For more information, see Savings estimation mode.



Important

If you enable Cost Optimization Hub in AWS Cost Explorer, Compute Optimizer uses Cost Optimization Hub data, which includes your specific pricing discounts, to generate your recommendations. If Cost Optimization Hub isn't enabled, Compute Optimizer uses Cost

Explorer data and On-Demand pricing information to generate your recommendations. For more information, see Enabling Cost Explorer and Cost Optimization Hub in the in the AWS Cost Management User Guide.

Estimated monthly savings calculation

For each recommendation, we calculate the cost to operate a new EBS volume using the recommended volume specifications. Estimated monthly savings are calculated based on the number of running hours for the current volume and the difference in rates between the current volume specifications and the recommended volume specifications. The estimated monthly savings for EBS volumes displayed on the Compute Optimizer dashboard is a sum of the estimated monthly savings for all EBS volumes in the account with a finding classification of *Not optimized*.

Performance risk

The performance risk columns on the EBS volume details page the EBS volume recommendations page define the likelihood of the current and recommended EBS volume not meeting your workload requirements. Compute Optimizer calculates an individual performance risk score for each specification of the EBS volume, including volume type, volume size, baseline IOPS, burst IOPS, baseline throughput, and burst throughput. The performance risk of the current and recommended EBS volume is calculated as the maximum performance risk score across the analyzed resource specifications.

The values range from very low, low, medium, high, and very high. A performance risk of very low means that the EBS volume is predicted to always provide enough capability. The higher the performance risk means that you should validate whether the volume meets the performance requirements of your workload before migrating your resource. Decide whether to optimize for performance improvement, for cost reduction, or for a combination of these two. For more information, see Requesting modifications to your EBS Volumes in the Amazon Elastic Compute Cloud User Guide.



Note

If Compute Optimizer doesn't display a risk value for your current Amazon EBS volume, this means that the volume is predicted to provide enough performance capability and is considered to have a very low performance risk.

Performance risk 97

Utilization graphs

The **EBS volume details** page displays utilization metric graphs for your current volume. The graphs display data for the analysis period. Compute Optimizer uses the maximum utilization point within each five-minute time interval to generate EBS volume recommendations.

You can change the graphs to display data for the last 24 hours, three days, one week, or two weeks. You can also change the statistic of the graphs between average and maximum.

The following utilization graphs are displayed on the details page:

Graph name	Description
Read operations (per second)	The completed read operations per second for the current EBS volume.
	For Xen instances, data is reported only when there is read activity on the volume.
Write operations (per second)	The completed write operations per second to the current EBS volume.
	For Xen instances, data is reported only when there is write activity on the volume.
Read bandwidth (KiB/second)	The read kibibytes (KiB) per second from the current EBS volume.
Write bandwidth (KiB/second)	The written kibibytes (KiB) per second to the current EBS volume.
Burst balance (percent)	The percentage of I/O credits remaining in the burst bucket for the current EBS volume.
	This metric is displayed only for General Purpose SSD (gp2) volumes in the Compute Optimizer console.

Accessing EBS volumes recommendations and details

You can use one of the following procedures to access either the EBS volumes recommendations or the **EBS volume details** pages in the AWS Console.

On the **EBS volumes recommendations** page you can view the recommendations for your current EBS volumes. On the EBS volume details page you can view the details of a specific volume and its recommendations.

Procedures

Accessing EBS volumes recommendations page

To access the EBS volume recommendations page

- Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.
- Choose **EBS volumes** in the navigation pane.

The recommendations page lists the specifications and finding classifications of your volumes, along with the specifications of the recommended volumes. The current volumes listed are from the AWS Region that is currently selected, in the selected account.

- You can perform the following actions on the recommendations page:
 - Filter recommendations by AWS Regions, Findings, or Finding reasons. To do this, first select the Filter by one or more properties text box. Then, choose the property and a value in the drop-down list that appears.
 - Filter your recommendations by tags. To do this, select the **Tag key** or **Tag value** text box. Then, enter the key or value you want to filter your EBS volume recommendations by.
 - For example, to find all recommendations that have a tag with the key of Owner and the value of TeamA, specify tag: Owner for the filter name and TeamA for the filter value.
 - View recommendations for volumes in another account. To do this, choose Account, and then select a different account ID.



Note

If you're signed in to a management account of an organization and trusted access with Compute Optimizer is enabled, you can view recommendations for resources

in other accounts. For more information, see <u>Accounts supported by Compute</u> Optimizer and Trusted access for AWS Organizations.

- Clear the selected filters. To do this, choose **Clear filters** next to the filter.
- Access the EBS volume details page for a specific volume. To do this, choose the finding classification listed next to the desired volume.

When you're ready, use Amazon EBS Elastic Volumes to modify the configuration of your volumes. For more information, see <u>Amazon EBS Elastic Volumes</u> in the *Amazon Elastic Compute Cloud User Guide*.

Accessing EBS volume details page

To access the EBS volume details page

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose **EBS volumes** in the navigation pane.
- 3. Choose the finding classification listed next to the volume for which you wish to view detailed information.

The details page lists up to three optimization recommendations for the volume that you chose. It lists the specifications of your current volume, the specifications and performance risks of the recommended volumes, and utilization metric graphs.

- 4. You can perform the following actions on the details page:
 - Choose a recommendation option to view the utilization comparison between your current volume and a recommended volume.

The utilization metric graphs for your current volume are displayed at the bottom of the page.

To change the time range of the graphs, choose Time Range, and then choose Last 24 hours, Last 3 days, Last week, or Last 2 weeks.

Choosing a shorter time range displays the data points at a higher granularity, which provides a higher level of detail.

 To change the statistic value of the graphs, choose Statistics, and then choose Average or Maximum.

You can use this option to determine the typical volume utilization of your workload over time. To view the highest value observed during the specified period, change the selection to **Maximum**. This allows you to determine the peak volume usage of your workload over time.

When you're ready, use Amazon EBS Elastic Volumes to modify the configuration of your volumes. For more information, see <u>Amazon EBS Elastic Volumes</u> in the *Amazon Elastic Compute Cloud User Guide*.

Viewing Lambda function recommendations

AWS Compute Optimizer generates memory size recommendations for AWS Lambda functions. Recommendations for your functions are displayed in the following pages of the Compute Optimizer console:

- The Lambda functions recommendations page lists each of your current functions, their finding classifications, finding reasons, current configured memory, current usage, and current cost. The top recommendation from Compute Optimizer is listed next to each of your functions, and it includes the recommended configured memory, recommended cost, and the price difference between your current function and the recommendation. Note that the recommended cost is a range that is displayed under the Recommended cost (high) and Recommended cost (low) columns in the console. Use the recommendations page to compare your current functions with their top recommendation, which can help you to decide if you should up-size or down-size the configured memory of your function.
- The **Lambda function details** page, which you can access from the Lambda function recommendations page, lists the top optimization recommendation for a function. It lists the configuration for your current function and the recommendation option. The details page also displays utilization metric graphs for the current function.

The recommendations are refreshed daily. They're generated by analyzing the specifications and utilization metrics of the current function over a period of the last 14 days. For more information, see Metrics analyzed by AWS Compute Optimizer.

Keep in mind that Compute Optimizer generates recommendations for Lambda functions that meet a specific set of requirements, recommendations could take up to 24 hours to be generated, and sufficient metric data must be accumulated. For more information, see Resource requirements.

Contents

- Finding classifications
- Estimated monthly savings and savings opportunity
- Current performance risk
- Utilization graphs
- Accessing Lambda function recommendations and details

Finding classifications

The **Finding** column on the **Lambda functions recommendations** page provides a summary of how each of your functions performed during the analyzed period.

The following findings classifications apply to Lambda functions.

Classification	Description
Not optimized	A Lambda function is considered not optimized when Compute Optimizer has identified that its configured memory or CPU power (which is proportional to the configured memory) is under-provisioned or over-provisioned. In this case, Compute Optimizer generates a recommendation that can provide better performance or cost for your workload. When a function is not optimized, Compute Optimizer displays a finding reason of either Memory under-provisioned or Memory over-provisioned.
Optimized	A Lambda function is considered optimized when Compute Optimizer determines that its configured memory or CPU power (which is proportional to the configured memory) is correctly provisioned to run your workload.

Classification	Description
Unavailable	Compute Optimizer was unable to generate a recommend ation for the function. This could be because the function has not met the <u>requirements of Compute Optimizer for Lambda functions</u> , or the function does not qualify for a recommend ation.
	For this finding classification, Compute Optimizer displays one of the following finding reasons:
	 Insufficient data when the function does not have sufficien t metric data for Compute Optimizer to generate a recommendation.
	 Inconclusive when the function does not qualify for a recommendation because the function has configured memory greater than 1,792 MB, or Compute Optimizer cannot generate a recommendation with a high degree of confidence.
	(i) Note Functions with a finding of Unavailable are not listed in the Compute Optimizer console.

Estimated monthly savings and savings opportunity

Estimated monthly savings (after discounts)

This column lists the approximate monthly cost savings that you experience by migrating your workloads from the current Lambda function memory specification to the recommended memory specification under the Savings Plans pricing model. To receive recommendations with Savings Plans discounts, the savings estimation mode preference needs to be activated. For more information, see Savings estimation mode.



Note

If you don't activate the savings estimation mode preference, this column displays the default On-Demand pricing discount information.

Estimated monthly savings (On-Demand)

This column lists the approximate monthly cost savings that you experience by migrating your workloads from the current Lambda function memory specification to the recommended memory specification under the On-Demand pricing model.

Savings opportunity (%)

This column lists the percentage difference between the price of the current Lambda function memory specification and the price of the recommended specification. If savings estimation mode is activated, Compute Optimizer analyzes the Savings Plans pricing discounts to generate the savings opportunity percentage. If savings estimation mode isn't activated, Compute Optimizer only uses On-Demand pricing information. For more information, see Savings estimation mode.

If you enable Cost Optimization Hub in AWS Cost Explorer, Compute Optimizer uses Cost Optimization Hub data, which includes your specific pricing discounts, to generate your recommendations. If Cost Optimization Hub isn't enabled, Compute Optimizer uses Cost Explorer data and On-Demand pricing information to generate your recommendations. For more information, see Enabling Cost Explorer and Cost Optimization Hub in the in the AWS Cost Management User Guide.

Estimated monthly savings calculation

For each recommendation, we calculate the cost to operate a new Lambda function using the recommended memory specification. Estimated monthly savings are calculated based on the number of running hours for the current Lambda function and the difference in rates between the current memory specification and the recommended memory specification. The estimated monthly savings for Lambda functions displayed on the Compute Optimizer dashboard is a sum of the estimated monthly savings for all Lambda functions in the account with a finding classification of Not optimized.

Current performance risk

The **Current performance risk** column on the **Lambda functions recommendations** page defines the likelihood of each current Lambda function not meeting the resource needs of its workload. The current performance risk values range from very low, low, medium, and high. A very low performance risk means that the current Lambda function is predicted to always provide enough capability. The higher the performance risk is, the more likely you should consider the recommendation generated by Compute Optimizer.

Utilization graphs

The **Lambda function details** page displays utilization metric graphs for your current function. The graphs display data for the analysis period. Compute Optimizer uses the maximum utilization point within each five-minute time interval to generate Lambda function recommendations.

You can change the graphs to display data for the last 24 hours, three days, one week, or two weeks.

The following utilization graphs are displayed on the details page:

Graph name	Description
Duration (milliseconds)	The amount of time that your function code spends processing an event.
Errors (count)	The number of invocations that result in a function error. Function errors include exceptions thrown by your code and exception s thrown by the Lambda runtime. The runtime returns errors for issues such as timeouts and configuration errors.
Invocations (count)	The number of times your function code is executed, including successful executions and executions that result in a function error.

Current performance risk 105

Accessing Lambda function recommendations and details

You can use one of the following procedures to access either the Lambda function **recommendations** or the **Lambda function details** pages in the AWS Console.

On the **Lambda function recommendations** page you can view the recommendations for your current functions. On the **Lambda function details** page you can view the details of a specific function and its recommendations.

Procedures

Accessing Lambda function recommendations page

To access the Lambda function recommendations page

- Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.
- Choose **Lambda functions** in the navigation pane.

The recommendations page lists the specifications and finding classifications of your functions, along with the specifications of the recommended functions. The current functions listed are from the AWS Region that is currently selected, in the selected account.

- You can perform the following actions on the recommendations page:
 - Filter recommendations by AWS Regions, Findings, or Finding reasons. To do this, first select the Filter by one or more properties text box. Then, choose the property and a value in the dropdown list that appears.
 - Filter your recommendations by tags. To do this, select the **Tag key** or **Tag value** text box. Then, enter the key or value you want to filter your Lambda function recommendations by.
 - For example, to find all recommendations that have a tag with the key of Owner and the value of TeamA, specify tag: Owner for the filter name and TeamA for the filter value.
 - · View recommendations for functions in another account. To do this, choose Account, and then select a different account ID.



Note

If you're signed in to a management account of an organization and trusted access with Compute Optimizer is enabled, you can view recommendations for resources

in other accounts. For more information, see <u>Accounts supported by Compute</u> Optimizer and Trusted access for AWS Organizations.

- Clear the selected filters. To do this, choose Clear filters next to the filter.
- Access the Lambda function details page for a specific function. To do this, choose the finding classification listed next to the function that you want to access.

Modify the configured memory of your Lambda function when you're ready. For more information, see Configuring Lambda function memory in the AWS Lambda Developer Guide.

Accessing Lambda function details page

To access the Lambda function details page

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose **Lambda functions** in the navigation pane.
- 3. Choose the finding classification listed next to the function for which you wish to view detailed information.

The details page lists the top optimization recommendation for the function that you chose. It lists the specifications of your current function, the recommended function configuration, and utilization metric graphs.

- 4. You can perform the following actions on the details page:
 - Choose a recommendation option to view the utilization comparison between your current function and a recommended function.

The utilization metric graphs for your current function are displayed at the bottom of the page.

To change the time range of the graphs, choose Time Range, and then choose Last 24 hours, Last 3 days, Last week, or Last 2 weeks.

Choosing a shorter time range displays the data points at a higher granularity, which provides a higher level of detail.

Modify the configured memory of your Lambda function when you're ready. For more information, see Configuring Lambda function memory in the AWS Lambda Developer Guide.

Viewing Amazon ECS services on Fargate recommendations

AWS Compute Optimizer generates recommendations for Amazon ECS services on Fargate. These recommendations are displayed on the following pages of the Compute Optimizer console.

The **Recommendations for Amazon ECS services on Fargate** page lists the following information for each of your ECS services:

- Finding classifications
- Finding reasons
- Estimated monthly savings
- Savings opportunity
- Current performance risk

The recommendations from Compute Optimizer are listed next to each of your Amazon ECS services. The information that's provided includes the recommended CPU and memory size within an Amazon ECS service, the hourly price for the selected purchasing option, and the price difference between your current Amazon ECS service and the service with Compute Optimizer's recommended configurations. This information can help you decide if you up-size or downsize your Amazon ECS services on Fargate. For more information about how to view your recommendations for Amazon ECS services on Fargate, see Accessing ECS service recommendations and details.



Note

The recommendations are refreshed daily and they can take up to 24 hours to generate. Keep in mind that Compute Optimizer requires 24 hours of metrics in the past 14 days to generate recommendations for Amazon ECS service on Fargate. For more information, see Requirements for Amazon ECS services on Fargate.

ECS service recommendations 108

The **Amazon ECS service details** page provides the following information for your Amazon ECS service:

- Your current Amazon ECS service task size settings and Compute Optimizer's recommended task size settings. Use the table to compare your current task settings, such as CPU size, memory size, and pricing details, with Compute Optimizer recommendations.
- Your current container size settings and Compute Optimizer's recommended container size settings. Use the table to compare your current container settings, such as CPU size, memory size, and memory reserved, with Compute Optimizer recommendations.
- Use the utilization graphs to compare your current Amazon ECS service CPU and memory utilization metrics with Compute Optimizer's recommendation. The graphs show visually the impact of these recommendations.

For more information about how to view the details for your Amazon ECS service on Fargate, see Accessing ECS service details page.

Contents

- Finding classifications
- Finding reasons
- Estimated monthly savings and savings opportunity
- Current performance risk
- Compare current settings with recommended task size
- Compare current settings with recommended container size
- Utilization graphs
- Accessing ECS service recommendations and details

Finding classifications

The **Findings** column on the **Recommendations for Amazon ECS services on Fargate** page provides a summary of how each of your services performed during the analysis period.

The following findings classifications apply to Amazon ECS services on Fargate.

Classification	Description
Under-provisioned	When Compute Optimizer detects that there's not enough memory or CPU, an Amazon ECS service is considered underprovisioned. Compute Optimizer displays a finding reason of CPU under-provisioned or Memory under-provisioned. An under-provisioned Amazon ECS service might result in poor application performance.
Over-provisioned	When Compute Optimizer detects that there's excessive memory or CPU, an Amazon ECS service is considered over-provisioned. Compute Optimizer displays a finding reason of CPU over-provisioned or Memory over-provisioned. An over-provisioned Amazon ECS service might result in additional infrastructure costs.
Optimized	When both the CPU and memory of your Amazon ECS service meet the performance requirements of your workload, the service is considered optimized.

For more information about under-provisioned and over-provisioned Amazon ECS services on Fargate, see <u>Finding reasons</u> in the <u>Viewing Amazon ECS services on Fargate recommendations</u> topic.

Finding reasons

The **Finding reasons** column on the **Recommendations for Amazon ECS services on Fargate** page shows which specification of an Amazon ECS service on Fargate is under-provisioned or over-provisioned.

The following finding reasons apply to Amazon ECS services on Fargate.

Finding reason	Description
CPU over-provisioned	The ECS service CPU configuration can be sized down while still meeting the performance requirements of your workload. This

Finding reason	Description
	is identified by analyzing the CPUUtilization metric of the current service during the look-back period.
CPU under-provisioned	The ECS service CPU configuration can be sized up to enhance the performance of your workload. This is identified by analyzing the CPUUtilization metric of the current service during the look-back period.
Memory over-provisioned	The ECS service memory configuration can be sized down while still meeting the performance requirements of your workload. This is identified by analyzing the MemoryUtilization metric of the current service during the look-back period.
Memory under-provisioned	The ECS service memory configuration can be sized up to enhance the performance of your workload. This is identified by analyzing the MemoryUtilization metric of the current service during the look-back period.

For more information about these metrics, see Amazon ECS CloudWatch metrics in the Amazon ECS User Guide for AWS Fargate.

Estimated monthly savings and savings opportunity

Estimated monthly savings (after discounts)

This column lists the approximate monthly cost savings that you experience after you adjust the configurations of your Amazon ECS service on Fargate to the recommended configurations under the Savings Plans pricing model. To receive recommendations with Savings Plans discounts, the savings estimation mode preference needs to be activated. For more information, see Savings estimation mode.



Note

If you don't activate the savings estimation mode preference, this column displays the default On-Demand pricing discount information.

Estimated monthly savings (On-Demand)

This column lists the approximate monthly cost savings that you experience after you adjust the configurations of your Amazon ECS service on Fargate to the recommended configurations under the On-Demand pricing model.

Savings opportunity (%)

This column lists the percentage difference between the price of the current ECS service on Fargate and the price of the service with the recommended configurations. If savings estimation mode is activated, Compute Optimizer analyzes the Savings Plans pricing discounts to generate the savings opportunity percentage. If savings estimation mode isn't activated, Compute Optimizer only uses On-Demand pricing information. For more information, see Savings estimation mode.

Important

If you enable Cost Optimization Hub in AWS Cost Explorer, Compute Optimizer uses Cost Optimization Hub data, which includes your specific pricing discounts, to generate your recommendations. If Cost Optimization Hub isn't enabled, Compute Optimizer uses Cost Explorer data and On-Demand pricing information to generate your recommendations. For more information, see Enabling Cost Explorer and Cost Optimization Hub in the in the AWS Cost Management User Guide.

Estimated monthly savings calculation

For each recommendation, Compute Optimizer calculates the cost to operate a new Amazon ECS service on Fargate by using the recommended service specifications. Estimated monthly savings are calculated based on the estimated monthly running time of the current Amazon ECS service. The savings are also based on the difference in rates between the current Amazon ECS service and the service with the recommended configurations.



Note

To calculate the estimated monthly running time of your Amazon ECS services on Fargate, Compute Optimizer analyzes your utilization data over the past 14 days. Then, Compute Optimizer uses the analysis results to estimate your monthly usage.

The estimated monthly savings for Amazon ECS services that are displayed on the Compute Optimizer dashboard is a sum of the estimated monthly savings for all over-provisioned services in the account.

Current performance risk

The Current performance risk column on the Recommendations for Amazon ECS services on Fargate page defines how likely each current Amazon ECS service doesn't meet workload resource needs. The values for current performance risk are Very low, Low, Medium, and High.

A very low performance risk means that the current Amazon ECS service is predicted to consistently provide enough capability. A high performance risk is likely due to high CPU or memory utilization. If your Amazon ECS service is always running at capacity, it increases the chances of your service suffering from higher latency or lower performance. Compute Optimizer's recommendations provides you with enough capacity to run your workloads efficiently.

Compare current settings with recommended task size

On the **Amazon ECS service details** page, compare the current Amazon ECS service task size with Compute Optimizer's recommended task size for your resources. Savings and performance risk information for your Amazon ECS service is also provided in the table. The following table provides a description for each column section in the console.

Column	Description
CPU size	The CPU size of the current Amazon ECS service tasks and Compute Optimizer's recommended CPU size configurations.
Memory size	The memory size of the current Amazon ECS service tasks and Compute Optimizer's recommended memory size configurations.
Pricing details	The On-Demand price of the current Amazon ECS service on Fargate and Compute Optimizer's recommended configurations. For more information, see AWS Fargate Pricing .

Current performance risk 113

Column	Description
Estimated monthly savings	The approximate monthly cost savings after you adjust the configurations of your Amazon ECS service to Compute Optimizer 's recommended configurations. For more information, see Estimated monthly savings and savings opportunity .
Savings opportunity (%)	The percentage difference between the price of your current Amazon ECS service and the price of the service with Compute Optimizer 's recommended configurations. For more information, see Estimated monthly savings and savings opportunity .
Price difference	The difference between the public pricing of the current Amazon ECS service on Fargate and the service with Compute Optimizer 's recommended configurations. For more information, see AWS Fargate Pricing .
Performance risk	This defines how likely your current Amazon ECS service and Compute Optimizer's recommendation doesn't meet workload resource needs. The values for performance risk are Very low, Low, Medium, and High. For more information, see Current performance risk .

Column	Description
Auto Scaling configuration	The Auto Scaling configuration of your current Amazon ECS service and Compute Optimizer 's recommended task size. If your service has a step scaling policy or a target tracking policy on both CPU and memory, Compute Optimizer can't generate any Auto Scaling recommend ations. If a target tracking policy is on the service's CPU only, Compute Optimizer only generates memory size recommendations. Or, if a target tracking policy is on the service's memory only, Compute Optimizer only generates CPU
	For more information about step scaling and target scaling policies, see Step scaling policies for Application Auto Scaling and Target tracking scaling policies for Application Auto Scaling in the Application Auto Scaling User Guide.

Compare current settings with recommended container size

On the Amazon ECS service details page, compare the current Amazon ECS service container size with the recommended container size options. The table provides your current and Compute Optimizer's recommended CPU size, memory size, and memory reserved configurations. Compute Optimizer generates container-level recommendations that are compatible with the recommended task size.



Note

Compute Optimizer only provides container size setting recommendations for when container size settings need to adjust to fit within an Amazon ECS service task. For example, suppose that Compute Optimizer recommends downsizing a task size. Then,

Compute Optimizer provides container-level setting recommendations to make sure that the task size and container size settings are compatible with each other.

Utilization graphs

The Amazon ECS service details page displays utilization metric graphs for your Amazon ECS services on Fargate and Compute Optimizer recommendations. The graphs display the current and recommended CPU and memory data for the analysis period. Compute Optimizer uses the maximum utilization point within each one-minute time interval to generate recommendations ECS services on Fargate.

The solid blue line is the utilization of your current service. If you used the recommendations during the analysis period, the green line is the projected upper bound value and the grey line is the projected lower bound value.



Note

The utilization values of an Amazon ECS service can vary based on the infrastructure Fargate uses. Compute Optimizer provides a utilization range to help you consider all possible operating conditions.

You can change the graphs to display data for the last 24 hours, 3 days, 1 week, or 2 weeks. You can also change the statistic of the graphs between average and maximum.

The following utilization graphs are displayed on the details page.

Graph name	Description
CPU utilization (percent)	The percentage of CPU capacity that's used in the service.
	The graph compares the CPU utilization data of your current Amazon ECS service with the service when the recommended configura tions are applied. The comparison shows you what the CPU utilization is if you configured your CPU to the recommended settings during

Utilization graphs 116

Graph name	Description
	the analysis period. This comparison shows if the recommended Amazon ECS service settings are within your workload's performance threshold.
Memory utilization (percent)	The percentage of memory that's used in the service. The graph compares the memory utilization data of your current Amazon ECS service with the service when the recommended configurations are applied. The comparison shows you what the memory utilization is if you configured your memory to the recommended settings during the analysis period. This comparison shows if the recommended Amazon ECS service settings are within your workload's performance threshold.

Accessing ECS service recommendations and details

You can use one of the following procedures to access either the **Recommendations for Amazon ECS services on Fargate** or the **Amazon ECS service details** pages in the AWS Console.

On the **Recommendations for Amazon ECS services on Fargate** page you can view the recommendations for your current services. On the **Amazon ECS service details** page you can view the details of a specific service and its recommendations.

Procedures

Accessing ECS service recommendations page

To access the ECS service recommendations page

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. In the navigation pane, choose **ECS services on Fargate**.



Note

The current services listed are from the AWS Region that's currently selected in the selected account.

- You can perform the following actions on the recommendations page: 3.
 - Filter recommendations by AWS Regions, Findings, or Finding reasons. To do this, first select the **Filter by one or more properties** text box. Then, choose the property and a value in the dropdown list that appears.
 - Filter your recommendations by tags. To do this, select the Tag key or Tag value text box. Then, enter the key or value you want to filter your ECS service recommendations by.
 - For example, to find all recommendations that have a tag with the key of Owner and the value of TeamA, specify tag: Owner for the filter name and TeamA for the filter value.
 - View recommendations for services in another account. To do this, choose **Account**, and then select a different account ID.



Note

If you're signed in to a management account of an organization and trusted access with Compute Optimizer is enabled, you can view recommendations for resources in other accounts. For more information, see Accounts supported by Compute Optimizer and Trusted access for AWS Organizations.

Clear the selected filters. To do this, choose Clear filters next to the filter.

Accessing ECS service details page

To access the ECS service details page

- Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.
- 2. In the navigation pane, choose **ECS services on Fargate**.
- Select the service name you want to view detailed information for. Then, choose **View details**. 3.
- You can perform the following actions on the details page: 4.

• On the utilization graphs, you can hover over the graph to see exact values on specific dates over the analysis period.

- To change the time range of the graphs, choose **Time Range**, and then choose **Last 24** hours, Last **3 days**, Last week, or Last **2 weeks**.
 - Choosing a shorter time range displays the data points at a higher granularity, which provides a higher level of detail.
- To change the statistic value of the graphs, choose Statistics, and then choose Average or Maximum.

You can use this option to determine the typical Amazon ECS service utilization of your workload over time. To view the highest value observed during the specified period, change the selection to **Maximum**. This way, you can determine the peak service usage of your workload over time.

Viewing commercial software license recommendations

AWS Compute Optimizer generates license recommendations for commercial software that run on Amazon EC2. These recommendations are displayed on the following pages of the Compute Optimizer console.

The **Recommendations for commercial software licenses** page lists the following information for each of your EC2 instances with licenses.

- Finding classifications
- Finding reasons
- · Estimated monthly savings
- Savings opportunity
- On-Demand prices
- BYOL hourly license prices

The recommendations from Compute Optimizer are listed next to each of your EC2 instances with commercial software licenses. The information that's provided includes recommended saving opportunities, EC2 instance On-Demand prices, and hourly bring your own license (BYOL) prices. This information can help you decide if you should down-size your license edition. For

more information about how to view your license recommendations for commercial software, see Accessing commercial software license recommendations and details.



Note

The recommendations are refreshed daily and they can take up to 24 hours to generate. Keep in mind that Compute Optimizer requires 24 hours of metrics in the past 14 days to generate license recommendations. For more information, see Commercial software license requirements.

The **License details** page provides the following information for your license recommendation:

- Your current license settings and Compute Optimizer's recommended licence configurations. Use the table to compare your current license configurations, such as edition, model, and number of instance cores, with Compute Optimizer recommendations.
- Use the utilization graphs to access the utilization of the current license during the analysis period.

For more information about how to view the details for your license recommendation, see Accessing commercial software license details page.

Contents

- Finding classifications
- Finding reasons
- Estimated monthly savings and savings opportunity
- Inferred workload types
- Compare current license edition with recommended license edition
- **Utilization graphs**
- Accessing commercial software license recommendations and details

Finding classifications

The **Findings** column on the **Commercial software license recommendations** page provides a summary of how each of your licenses performed during the analyzed period.

The following findings classifications apply to Microsoft SQL Server licenses.

Classification	Description
Insufficient metrics	When Compute Optimizer detects that your CloudWatch Application Insights isn't enabled or is enabled with insuffici ent permissions. Compute Optimizer displays a finding reason of InvalidCloudwatchApplicationInsights or CloudwatchApplicationInsightsError .
Not optimized	When Compute Optimizer detects that your EC2 infrastru cture isn't using any of the Microsoft SQL server license features you're paying for, a license is considered not optimized . Compute Optimizer displays a finding reason of LicenseOv erprovisioned . A license that isn't optimized might result in unnecessary additional costs.
Optimized	When the license for your SQL server database meets your performance requirements, the license is considered optimized.

For more information about these finding classifications, see Finding reasons.

Finding reasons

The **Finding reasons** column on the **EC2 instances recommendations** and **EC2 instance details** pages shows which specification of an instance is under-provisioned or over-provisioned.

The following finding reasons apply to Microsoft SQL server license recommendations.

Finding reason	Description
LicenseOverprovisi oned	A license is considered over-provisioned when any of the current license features aren't in use. CloudWatch Application Insights analyzes the mssql_enterprise_features_u sed metric to identify this.
	If your license is over-provisioned, you can consider downgrading your Microsoft SQL Server license. If you meet certain

Finding reason	Description
	eligibility requirements you can downgrade from SQL Server Enterprise edition to SQL Server Standard edition, or Developer edition if it is a non-production workload. For more information, see Downgrade your Microsoft SQL Server edition in the Microsoft SQL Server on Amazon EC2 User Guide.
InvalidCloudwatchA pplicationInsights	The backend exporter of your CloudWatch Application Insights isn't configured properly. For more information about how to configure CloudWatch Application Insights, see Set up Amazon CloudWatch Application Insights for monitoring in the Amazon CloudWatch User Guide.
CloudwatchApplicat ionInsightsError	You have configured CloudWatch Application Insights but it hasn't identified the number of Enterprise edition features in use. It can take a few hours to identify the features. If the features aren't identified after a few hours, contact Support.

Estimated monthly savings and savings opportunity

The **Estimated monthly savings (On-Demand)** column lists the approximate monthly cost savings after you downgrade your license edition based on Compute Optimizer's recommendations. To calculate this, Compute Optimizer multiplies the savings per hour by the estimated monthly running hours.

The **Savings opportunity (%)** column lists the percentage difference between your current Microsoft SQL server license and Compute Optimizer's recommended license. The Bring Your Own License (BYOL) savings calculation is based on the license price. The License Included savings calculation is based on the On-Demand pricing.

Important

Savings opportunity data requires that you opt in to Cost Explorer, as well as activate **Receive Amazon EC2 resource recommendations** in the Cost Explorer preferences page. That creates a connection between Cost Explorer and Compute Optimizer. With this connection, Cost Explorer generates savings estimates considering the price of existing resources, the price of recommended resources, and historical usage data.

Estimated monthly savings reflects the projected dollar savings associated with each of the recommendations generated. For more information, see Enabling Cost Explorer and Optimizing your cost with Rightsizing Recommendations in the Cost Management User Guide.

Inferred workload types

The Inferred workload types column on the EC2 instances recommendations page lists the applications that might be running on the instance as inferred by Compute Optimizer. This column does this by analyzing the attributes of your instances. These attributes include the instance name, tags, and configuration. Compute Optimizer can currently infer if your instances are running Amazon EMR, Apache Cassandra, Apache Hadoop, Memcached, NGINX, PostgreSQL, Redis, Kafka, or SQLServer. By inferring the applications that run on your instances, Compute Optimizer can identify the effort to migrate your workloads from x86-based instance types to Arm-based AWS Graviton instances types. For more information, see Migration effort in the next section of this guide.



Note

You can't infer the SQLServer application in the Middle East (Bahrain), Africa (Cape Town), Asia Pacific (Hong Kong), Europe (Milan), and Asia Pacific (Jakarta) Regions.

Compare current license edition with recommended license edition

On the License details page, compare the configurations of your current license edition with Compute Optimizer's recommended license edition. The following table provides a description for each column section in the console.

Column	Description
License edition	The current license edtion and the recommend ed license edition. For example, Enterprise, Standard, and Free.
Instance On-Demand price	The current and recommended On-Demand instance prices.

Inferred workload types 123

Column	Description
BYOL price (hourly)	The current and recommended Bring your own license (BYOL) hourly price.
Estimated monthly savings	The approximate monthly cost savings after you downgrade your license edition based on Compute Optimizer's recommendations. For more information, see Estimated monthly savings and savings opportunity .
Savings opportunity (%)	The percentage difference between your current Microsoft SQL server license and Compute Optimizer's recommended license. For more information, see Estimated monthly savings and savings opportunity .
Instance cores	The current and recommended number of physical cores for an instance. Number of instance cores are used in licensing calculations.

Utilization graphs

The **License details** page displays current resource utilization of the current commercial software license. The graph only displays the number of Enterprise editon features that were used data over the analysis period.

You can change the graphs to display data for the last 24 hours, three days, one week, or two weeks.

Accessing commercial software license recommendations and details

You can use one of the following procedures to access either the **Recommendations for commercial software licenses** or the **License details** pages in the AWS Console.

Utilization graphs 124

On the **Recommendations for commercial software licenses** page you can view the recommendations for your current licenses. On the License details page you can view the details of a specific license recommendation.

Procedures

Accessing commercial software license recommendations page

To access the commercial software license recommendations page

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.
- 2. Choose **Licenses** in the navigation pane.
- (Optional) You can also access the license recommendations from the EC2 instances page. To do this, first select the Filter by one or more properties. From the dropdown list that appears, choose the Inferred workload type property and then choose the Inferred workload type = **SOL Server value.**



Note

The current licenses listed are from the AWS Region that is currently selected, in the selected account.

- You can perform the following actions on the recommendations for commercial software licenses page:
 - Filter recommendations by AWS Regions, Findings, or Finding reasons. To do this, first select the Filter by one or more properties text box. Then, choose the property and a value in the dropdown list that appears.
 - Filter your recommendations by tags. To do this, select the **Tag key** or **Tag value** text box. Then, enter the key or value you want to filter your licesne recommendations by.
 - For example, to find all recommendations that have a tag with the key of Owner and the value of TeamA, specify tag: Owner for the filter name and TeamA for the filter value.
 - · View recommendations for functions in another account. To do this, choose Account, and then select a different account ID.



Note

If you're signed in to a management account of an organization and trusted access with Compute Optimizer is enabled, you can view recommendations for resources in other accounts. For more information, see Accounts supported by Compute Optimizer and Trusted access for AWS Organizations.

• Clear the selected filters. To do this, choose Clear filters next to the filter.

Accessing commercial software license details page

To access the commercial software license details page

- Open the Compute Optimizer console at https://console.aws.amazon.com/compute-1. optimizer/.
- Choose **Licenses** in the navigation pane. 2.
- 3. Choose the **Instance ID** you want to view detailed information.
- You can perform the following actions on the details page:
 - On the utilization graphs, you can hover over the graph to see exact values on specific dates over the analysis period.
 - To change the time range of the graphs, choose Time Range, and then choose Last 24 hours, Last 3 days, Last week, or Last 2 weeks.
 - Choosing a shorter time range displays the data points at a higher granularity, which provides a higher level of detail.
 - To change the statistic value of the graphs, choose Statistics, and then choose Average or Maximum.

Viewing Aurora and RDS database recommendations

Compute Optimizer generates DB instances, RDS DB instance storage, and Aurora DB cluster storage recommendations for RDS for MySQL, RDS for PostgreSQL, Amazon Aurora databases. These recommendations are displayed on the **Recommendations for Aurora and RDS databases** and Aurora and RDS databases details pages of the Compute Optimizer console. Both of these pages are divided into two separate tabs: **Instance** and **Storage**.

Recommendations for Aurora and RDS databases page

Instance

This tab displays each of your current Aurora and RDS DB instances, finding classifications, finding reasons, current instance type, estimated savings, and saving opportunities. The top recommendation from Compute Optimizer is listed next to each of your instances. This recommendation includes the recommended instance type, On-Demand pricing, and the price difference between your current instance. Use the recommendations page to compare your current instances with the top recommendation. Doing this can help you to decide if you want to upsize or downsize your instances.

Storage

This tab displays each of your current RDS instance storage volumes and Aurora DB cluster storage configurations, finding classifications, current storage type, and current price. The top recommendation from Compute Optimizer is listed next to each of your volumes or clusters. For RDS DB instance storage, it includes the recommended volume type, recommended IOPS, the price of the recommendation, and the price difference between your current volume and the recommendation. For Aurora DB clusters, it includes the recommended storage type, estimated cluster costs (instance, storage, and I/O), and potential savings. You can use the recommendations page to compare your current storage configurations with their top recommendation, which can help you to decide if you should change your storage type.

For more information about how to view your Aurora and RDS database recommendations, see Accessing Aurora and RDS database recommendations and details.

• Aurora and RDS database details page

Instance

This tab displays optimization recommendations for a specific RDS DB instance or Aurora DB instance. It lists the specifications for each recommendation including performance risk, price difference, and On-Demand pricing.

Storage

This tab displays the optimization recommendation for an RDS DB instance storage or Aurora DB cluster storage. For RDS DB instance storage, it lists the specifications for each recommendation including allocated storage, provisioned IOPS, throughput, and storage price difference. For

Aurora DB clusters, it shows storage type recommendations with estimated costs broken down by instance, storage, and I/O components, along with I/O cost variability information when enhanced infrastructure metrics is enabled.

Both detail pages display utilization metric graphs that you can use to compare the current instance or storage with the projected utilization metrics for the recommendation options. The graphs can help you to better understand the impact of these recommendations.

For more information about how to view your Aurora and RDS database details, see <u>Accessing</u> Aurora and RDS database details page.

The recommendations are refreshed daily and they can take up to 12 hours to generate. Keep in mind that Compute Optimizer requires at least 30 hours of Amazon CloudWatch metrics to generate recommendations for Amazon RDS DB instances. For more information, see Resource requirements.

Contents

- Finding classifications
- Finding reasons
- AWS Graviton-based instance recommendations
- Estimated monthly savings and savings opportunity
- Performance risk
- Comparison graphs
- Accessing Aurora and RDS database recommendations and details

Finding classifications

The **Finding** column on the **Recommendations for Aurora and RDS databases** page provides a summary of how your Amazon Aurora and RDS DB instances, RDS DB instances storage, and Aurora DB clusters performed during the lookback period.

Aurora and RDS DB instances

The following findings classifications apply to DB instances.

Classification	Description
Under-provisioned	When Compute Optimizer detects that there isn't enough CPU, memory, network bandwidth, EBS IOPS, or EBS throughput, an RDS DB instance is considered under-pro visioned. Compute Optimizer displays finding reasons, such as CPU under-provisioned, Memory under-provisioned, EBS IOPS under-provisioned, and Network bandwidth under-provisioned. An under-provisioned RDS DB instance might result in poor application performance.
Over-provisioned	When Compute Optimizer detects that there is excessive CPU, EBS IOPS, network bandwidth, or EBS throughpu t, an RDS DB instance is considered over-provisioned. Compute Optimizer displays finding reasons, such as CPU over-provisioned, EBS IOPS over-provisioned, Network bandwidth over-provisioned, and EBS throughput over-provisioned. An over-provisioned RDS DB instance might result in additional infrastructure costs.
Optimized	When the specifications of your RDS DB instance meet the performance requirements of your workload, the RDS DB instance is considered optimized. For optimized instances, Compute Optimizer might recommend a new generation DB instance class or that a new engine version is available.

RDS DB instance storage

The following findings classifications apply to RDS DB storage.

Classification	Description
Under-provisioned	When Compute Optimizer detects that there isn't enough allocated storage or EBS throughput, an RDS storage volume is considered under-provisioned. Compute Optimizer displays a finding reason of EBS volume allocated storage under-provisioned or EBS volume throughput under-pro

Classification	Description
	visioned . An under-provisioned RDS DB instance storage volume might result in poor application performance.
Over-provisioned	When Compute Optimizer detects that there is excessive IOPS or EBS throughput, an RDS DB instance storage volume is considered over-provisioned. Compute Optimizer displays a finding reason of EBS volume IOPS over-provisioned or EBS volume throughput over-provisioned . An over-provisioned DB instance storage volume might result in additional infrastructure costs.
Optimized	When the specifications of your RDS DB instance storage volume meet the performance requirements of your workload, the storage is considered optimized. For optimized DB instance storage, Compute Optimizer might recommend a new generation storage type.

For more information about under and over-provisioned RDS DB instances, see <u>Finding reasons</u> in the Viewing Aurora and RDS database recommendations topic.

Aurora DB clusters

The following findings classifications apply to Aurora DB clusters.

Classification	Description
Optimized	Compute Optimizer found the configurations of your Aurora DB cluster storage to be optimized from a cost perspective.
Not optimized	Compute Optimizer found potential cost savings if you switch your Aurora DB cluster from Aurora Standard storage to Aurora I/O-Optimized storage. Compute Optimizer displays a finding reason of DBClusterStorageSavingsAvai lable when Aurora I/O-Optimized is identified as the top option.

For more information about Amazon Aurora DB clusters, see <u>Amazon Aurora storage</u> in the *Amazon Aurora User Guide for Aurora*.

Finding reasons

The **Finding reasons** column on the **Recommendations for RDS DB instances** and **RDS DB instance details** pages shows the specifications of Compute Optimizer findings for Amazon Aurora and RDS DB instances, RDS DB instances storage, and Aurora DB clusters.

Aurora and RDS DB instances

The following finding reasons apply to RDS DB instances:

Finding reason	Description
CPU over-provisioned	The DB instance's CPU configuration can be sized down and also meet the performance requirements of your workload. This is identified by analyzing the CPUUtilization metric of the current instance during the lookback period.
CPU under-provisioned	The DB instance's CPU configuration doesn't meet the performance requirements of your workload and there is an alternative instance type that provides better CPU performance. This is identified by analyzing the CPUUtiliz ation metric of the current instance during the lookback period.
Memory under-provisioned	The DB instance's memory configuration doesn't meet the performance requirements of your workload and there isn't an alternative instance type that provides better memory performance.
	For RDS MySQL and RDS PostgreSQL DB instances, this is identified by analyzing the os.swap.in and os.swap.o ut metrics of the current instance if Amazon RDS Performance Insights is enabled. To enable Performance Insights for Aurora, see Turning Performance Insights on and off for Aurora in the Amazon Aurora User Guide.

Finding reason	Description
	For Aurora DB instances, this is identified by analyzing the os.memory.outOfMemoryKillCount metric of the current instance if Amazon RDS Performance Insights is enabled. For Aurora MySQL DB instances, Compute Optimizer also analyzes Aurora memory health state metrics. To enable Performance Insights for Aurora, see Turning Performance Insights on and off for Aurora in the Amazon Aurora User Guide.
EBS throughput over-prov isioned	The DB instance's EBS throughput configuration can be sized down and also meet the performance requirements of your workload. This is identified by analyzing the VolumeRea dBytes and VolumeWriteBytes metric of EBS volumes attached to the current instance during the lookback period.
EBS throughput under-pro visioned	The DB instance's EBS throughput configuration doesn't meet the performance requirements of your workload and there is an alternative instance type that provides better EBS throughput performance. This is identified by analyzing the VolumeReadBytes and VolumeWriteBytes metric of EBS volumes that are attached to the current instance during the lookback period.
EBS IOPS over-provisioned	The DB instance's EBS IOPS configuration can be sized down and also meet the performance requirements of your workload. This is identified by analyzing the VolumeRea dOps and VolumeWriteOps metrics of EBS volumes attached to the current instance during the lookback period.
EBS IOPS under-provisioned	The DB instance's EBS IOPS configuration doesn't meet the performance requirements of your workload and there is an alternative instance type that provides better EBS throughput performance. This is identified by analyzing the VolumeReadOps and VolumeWriteOps metrics of EBS volumes attached to the current instance during the lookback period.

Finding reason	Description
Network bandwidth over- provisioned	The DB instance's network bandwidth configuration can be sized down while still meeting the performance requireme nts of your workload. For RDS MySQL and RDS PostgreSQL DB instances, this is identified by analyzing the NetworkIn and NetworkOut metrics of the current instance during the lookback period.
Network bandwidth under- provisioned	The DB instance's network bandwidth configuration doesn't meet the performance requirements of your workload and there is an alternative instance type that provides better network bandwidth performance.
	For RDS MySQL and RDS PostgreSQL DB instances, this is identified by analyzing the NetworkIn and NetworkOut metrics of the current instance during the lookback period.
	For Aurora DB instances, this is identified by analyzing the NetworkThroughput and StorageNetworkThroughput metrics of the current instance during the lookback period.
Instance storage read IOPS under-provisioned	The DB instance's instance storage read IOPS limit doesn't meet the performance requirement of your workload and there is an alternative instance type that provides better performance. For Aurora DB instances, this is identified by analyzing the ReadIOPSEphemeralStorage metric during the lookback period.
Instance storage write IOPS under-provisioned	The DB instance's instance storage write IOPS limit doesn't meet the performance requirement of your workload and there is an alternative instance type that provides better performance. For Aurora DB instances, this is identified by analyzing the WriteIOPSEphemeralStorage metric during the lookback period.

Finding reason	Description
DB cluster writer under-pro visioned	This indicates that Compute Optimizer has synchornized the recommendation for this Aurora DB instance read replica with the DB cluster's writer because it has a promotion tier < or = to 1. Compute Optimizer does this to help you maintain your failover capacity.
New generation DB instance class available	If the current DB instance is a previous generation instance type, Compute Optimizer generates this finding reason to indicate that there is a new generation DB instance type available. We encourage you to use current generation instance types to get the best performance.
New engine version available	If the current engine version is deprecated, Compute Optimizer generates this finding reason to indicate that there is a new engine version available.

RDS DB instance storage

The following finding reasons apply to RDS DB instance storage.

Finding reason	Description
EBS volume allocated storage under-provisioned	The amount EBS volume allocated storage space attached to the DB instance doesn't meet the performance requireme nts of your workload and there is an alternative volume type that provides better allocated storage performance. This is identified by analyzing the VolumeReadOps and VolumeWriteOps metrics of EBS volumes attached to the current instance during the lookback period.
EBS volume IOPS over-prov isioned	The EBS volume IOPS configuration attached the DB instance can be sized down and also meet the performan ce requirements of your workload. This is identified by analyzing the VolumeReadBytes and VolumeWri

Finding reason	Description
	teBytes metrics of EBS volumes attached to the current instance during the lookback period.
EBS volume throughput under-provisioned	The size of the EBS volume throughput attached the DB instance doesn't meet the performance requirements of your workload and there is an alternative volume type that provides better volume throughput performance.
EBS volume throughput over-provisioned	The EBS volume throughput attached the DB instance can be sized down and also meet the performance requirements of your workload.
New generation storage type available	If the current DB instance storage is a previous generation n storage type, Compute Optimizer generates this finding reason to indicate that there is a new generation storage type available. We encourage you to use current generation storage types to get the best performance.

Aurora DB clusters

The following finding reasons apply to Aurora DB clusters.

Classification	Description
DBClusterStorageSa vingsAvailable	Potential cost savings were found by switching your Aurora DB cluster from Aurora Standard storage to Aurora I/O-Optimized storage. Your cluster's I/O usage pattern suggests that the predictable pricing model of Aurora I/O-Optimized would be more cost-effective than the variable I/O costs of Aurora Standard. This finding reason appears when I/O Optimized is identified as the top recommended option for your cluster.
DBClusterStorageOp tionAvailable	Aurora I/O-Optimized was found to be a viable alternative storage option for your Aurora DB cluster. While your current storage configuration is considered optimized from

Classification	Description
	a cost perspective, switching to Aurora I/O-Optimized could provide benefits such as more predictable monthly costs and simplified budgeting by eliminating variable I/O charges. This finding reason appears when I/O-Optimized is displayed as the second recommended option for your cluster.

AWS Graviton-based instance recommendations

When viewing Amazon RDS DB instance recommendations, you can view the price and performance impact of running your workload on AWS Graviton-based instances. To do so, choose **Graviton (aws-arm64)** in the **CPU architecture preference** dropdown. Otherwise, choose **Current** to view recommendations that are based on the same CPU vendor and architecture as the current RDS DB instance.

The Current price, Recommended price, Price difference, Price difference (%), and Estimated monthly savings columns are updated to provide a price comparison between the current DB instance type and the instance type of the selected CPU architecture preference. For example, if you choose Graviton (aws-arm64), prices are compared between the current DB instance type and the recommended Graviton-based instance type.

Estimated monthly savings and savings opportunity

Estimated monthly savings (after discounts)

Instance tab

This column lists the approximate monthly cost savings that you experience by migrating your workloads from the current DB instance or type to the recommended type under the Reserved Instances pricing models. To receive recommendations with Reserved Instances discounts, activate the savings estimation mode preference.

Storage tab

This column lists the approximate monthly cost savings that you experience by migrating your RDS DB instance storage volumes from the current specifications to the recommended specifications under specific discounts. For Aurora DB clusters, this represents the savings from changing between Aurora Standard and Aurora I/O-Optimized storage types, considering all cost components

(instance, storage, and I/O costs). To receive recommendations with specific discounts, activate the savings estimation mode preference.

For more information, see Savings estimation mode.



Note

If you don't activate the savings estimation mode preference, this column on both the Instance and Storage tabs display the default On-Demand pricing discount information.

Estimated monthly savings (On-Demand)

Instance tab

This column lists the approximate monthly cost savings that you experience by migrating your workloads from the current DB instance type to the recommended instance type under the On-Demand pricing model.

Storage tab

This column lists the approximate monthly cost savings that you experience by migrating your RDS DB instance storage volumes from the current specifications to the recommended specifications. For Aurora DB clusters, this includes the difference in total costs between your current storage type and the recommended storage type, considering instance, storage, and I/O cost components.

Savings opportunity (%)

This column lists the percentage difference between the price of the current instance and the price of the recommended DB instance type. If savings estimation mode is activated, Compute Optimizer analyzes the Reserved Instances pricing discounts to generate the savings opportunity percentage. If savings estimation mode isn't activated, Compute Optimizer only uses On-Demand pricing information. For more information, see Savings estimation mode.

For Aurora DB cluster storage recommendations, this represents the percentage difference in total costs (instance, storage, and I/O) between the current and recommended storage types.



Important

If you enable Cost Optimization Hub in AWS Cost Explorer, Compute Optimizer uses Cost Optimization Hub data, which includes your specific pricing discounts to generate your

recommendations. If Cost Optimization Hub isn't enabled, Compute Optimizer uses Cost Explorer data and On-Demand pricing information to generate your recommendations. For more information, see Enabling Cost Explorer and Cost Optimization Hub in the in the AWS Cost Management User Guide.

Estimated monthly savings calculation

For each recommendation, Compute Optimizer calculate the cost to operate a new RDS DB instance or storage using the recommended specifications. Estimated monthly savings are calculated based on the number of running hours for the current instance or storage and the difference in rates between the current specifications and the recommended specifications. The estimated monthly savings for RDS DB instances and storage that are displayed on the Compute Optimizer dashboard is a sum of the estimated monthly savings for all over-provisioned findings in the account.

Performance risk

The performance risk columns on the RDS DB instance details page and the RDS DB instance recommendations page define the likelihood of the current and recommended instance type not meeting your workload requirements. Compute Optimizer calculates an individual performance risk score for each specification of the current and recommended instance. This includes specifications such as CPU, EBS throughput, and EBS IOPS. The performance risk of the current and recommended instance is calculated as the maximum performance risk score across the analyzed resource specifications.

The values range from very low, low, medium, high, and very high. A very low performance risk means that the instance type is predicted to always provide enough capability. The higher the performance risk means that you should validate whether the instance meets the performance requirements of your workload before migrating your resource. Decide whether to optimize for performance improvement, for cost reduction, or for a combination of these two.

Comparison graphs

The **Amazon RDS database details** page displays utilization metric graphs for your current and recommended RDS DB instance and storage data for the lookback period. Compute Optimizer uses the maximum utilization point within each 5-minute time interval to generate RDS DB instance and storage recommendations.

Performance risk 138

You can change the graphs to display data for the last 24 hours, three days, one week, or two weeks. You can also change the statistic of the graphs between average and maximum.

The following comparison graphs are displayed on the Aurora and RDS database details page.

RDS DB instances

The following graphs are displayed for RDS DB instances:

Graph name	Description
CPU utilization	The percentage of allocated compute units that are in use on the DB instance. This metric identifies the processing power that's required to run an application on an instance.
Database connections (count)	The number of client sessions that are connected to the DB instance.
Network receive throughput (MiB/second)	The incoming (receive) network traffic on the DB instance, including both customer database traffic and Amazon RDS traffic used for monitoring and replication.
Network transmit throughpu t (MiB/second)	The outgoing (transmit) network traffic on the DB instance, including both customer database traffic and Amazon RDS traffic used for monitoring and replication.
EBS read operations (per second)	The average number of disk read I/O operations per second.
EBS write operations (per second)	The average number of disk write I/O operations per second.
EBS read throughput (MiB/second)	The average number of bytes read from disk per second.
EBS write throughput (MiB/ second)	The average number of bytes written to disk per second.

Graph name	Description
EBS IO balance (percent)	The percentage of I/O credits remaining in the burst bucket of your RDS database. This metric is available for basic monitoring only.
EBS Byte Balance (percent)	The percentage of throughput credits remaining in the burst bucket of your RDS database. This metric is available for basic monitoring only.
Free storage space	The amount of available storage space.
DB Load	The level of session activity in your database. For more information, see Database load in the Amazon Relational Database Service User Guide.
Swap in (KB)	The amount of memory, in kilobytes, swapped in from disk.
Swap out (KB)	The amount of memory, in kilobytes, swapped out to disk.



The **DB Load**, **Swap in (KB)**, and **Swap out (KB)** metrics are only available if you enabled Amazon RDS Performance Insights. To enable Performance Insights for your DB instances, see <u>Turning Performance Insights on and off for Amazon RDS</u> in the *Amazon Relational Database Service User Guide*.

Aurora DB instances

The following graphs are displayed for Aurora DB instances:

Graph name	Description
CPU utilization	The percentage of CPU used by an Aurora DB instance.
Memory utilization	The percentage of memory allocated by applications and the operating system as used.

Graph name	Description	
Database connections (count)	The number of client sessions that are connected to the DB instance.	
Network receive throughput (MiB/second)	The amount of network throughput received from clients by each instance in the Aurora DB cluster. This throughpu t doesn't include network traffic between instances in the Aurora DB cluster and the cluster volume.	
Network transmit throughpu t (MiB/second)	The amount of network throughput sent to clients by each instance in the Aurora DB cluster. This throughput doesn't include network traffic between instances in the DB cluster and the cluster volume.	
Storage network read throughput (MiB/second)	The amount of network throughput received from the Aurora storage subsystem by each instance in the DB cluster.	
Storage network write throughput (MiB/second)	The amount of network throughput sent to the Aurora storage subsystem by each instance in the Aurora DB cluster.	
Aurora memory health state	Indicates the memory health state. A value of 0 equals NORMAL. A value of 10 equals RESERVED, which means that the server is approaching a critical level of memory usage. 3 Note	
	This metric applies to Aurora MySQL only.	
Aurora memory number of declined SQL queries	The total number of queries declined as part of out-of-me mory (OOM) avoidance.	
	Note This metric applies to Aurora MySQL only.	

Graph name	Description
Aurora memory number of connections closed	The total number of connections closed as part of OOM avoidance.
	Note This metric applies to Aurora MySQL only.
Aurora memory number of queries killed	The total number of queries ended as part of OOM avoidance.
	Note This metric applies to Aurora MySQL only.
Buffer cache hit ratio	The percentage of requests that are served by the buffer cache. This graph is shown when an Optimized Reads DB instance class type is recommended an as option to help you evaluate whether it is the right fit for your workload.
Read IOPS ephermal storage	The average number of disk read operations to Ephemeral NVMe storage.
	(3) Note This metric applies to instances that support locally attached non-volatile memory express (NVMe) storage.

Graph name	Description	
Write IOPS ephermal storage	The average number of disk write operations to Ephemeral NVMe storage.	
	(3) Note This metric applies to instances that support locally attached non-volatile memory express (NVMe) storage.	
Read IOPS	The average number of disk read operations per second.	
Write IOPS	The number of Aurora storage write records generated per second. This is more or less the number of log records generated by the database. These do not correspond to 8K page writes, and do not correspond to network packets sent.	
DB Load	The number of active sessions for the database. Typically, you want the data for the average number of active sessions. In Performance Insights, this data is queried as db.load.avg.	

For more information, see Amazon CloudWatch metrics for Amazon Aurora in the Amazon Aurora User Guide.



Note

The **DB Load** graph is only available if you enabled Performance Insights for Aurora. To enable Performance Insights for Aurora, see Turning Performance Insights on and off for Aurora in the Amazon Aurora User Guide.

Aurora DB clusters

The following graphs are displayed for Aurora DB clusters:

Graph name	Description
VolumeBytesUsed	The amount of storage used by your Aurora DB cluster.
VolumeReadIOPs	The number of billed read I/O operations from a cluster volume within a 5-minute interval.
VolumeWriteIOPs	The number of write disk I/O operations to the cluster volume, reported at 5-minute intervals.

Accessing Aurora and RDS database recommendations and details

You can use one of the following procedures to access either the Aurora and RDS database **recommendations** or the **Aurora and RDS database details** pages in the AWS Console.

On the **Aurora and RDS database recommendations** page you can view the recommendations for your RDS DB instances. On the Aurora and RDS database details page you can view the details of a specific instance or storage and its recommendations.

Procedures

Accessing Aurora and RDS database recommendations page

To access the Aurora and RDS database recommendations page

- Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.
- Choose **Aurora and RDS databases** in the navigation pane.



Note

The current instances listed are from the AWS Region that is currently selected, in the selected account.

- 3. You can perform the following actions on the recommendations page:
 - View your instance or storage recommendations by choosing the Instance or Storage tab.
 - In the **Instance** tab only, you can view the price and performance impact of running your workload on AWS Graviton-based instances. To do this, choose Graviton (aws-arm64) in

the CPU architecture preference dropdown list. Otherwise, the Current (default) option displays recommendations that are based on the same CPU vendor and architecture as the current RDS DB instance.

- Filter instance or storage recommendations to one or mores AWS Regions. To do this, enter the name of the Region in the **Filter by one or more properties** text box, or choose one or more Regions in the drop-down list that appears.
- Filter your instance or storage recommendations by tags. To do this, first select the **Tag key** or **Tag value** text box. Then, enter the key or value that you want to filter your RDS instance recommendations by.

For example, to find all the recommendations that have a tag with the key of Owner and the value of TeamA, specify tag: Owner for the filter name and TeamA for the filter value.

• View instance or storage recommendations in another account. To do this, choose **Account**, and then select a different account ID.



Note

If you're signed in to a management account of an organization and trusted access with Compute Optimizer is enabled, you can view recommendations for resources in other accounts. For more information, see Accounts supported by Compute Optimizer and Trusted access for AWS Organizations.

• Clear the selected filters. To do this, choose **Clear filters** next to the filter.

Accessing Aurora and RDS database details page

To access the Aurora and RDS database details page

- Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.
- 2. Choose **Aurora and RDS databases** in the navigation pane.
- 3. Choose the finding classification listed next to the RDS DB instance or storage volume that you want to view.
- You can perform the following actions on the details page:
 - View your instance or storage recommendations by choosing the Instance or Storage tab.

In the Instance tab only, you can view the price and performance impact of running your
workload on AWS Graviton-based instances, choose Graviton (aws-arm64) in the CPU
architecture preference dropdown. Otherwise, the Current (default) option displays
recommendations that are based on the same CPU vendor and architecture as the current
RDS DB instance.

- On the comparison graphs, you can hover over the graph to see exact values on specific dates over the analysis period.
- To change the time range of the graphs, choose **Time Range**, and then choose **Last 24** hours, Last **3 days**, Last week, or Last **2 weeks**.
 - Choosing a shorter time range displays the data points at a higher granularity, which provides a higher level of detail.
- To change the statistic value of the graphs, choose Statistics, and then choose Average or Maximum.

You can use this option to determine the typical utilization of your workload over time. To view the highest value observed during the specified period, change the selection to **Maximum**. This way, you can determine the peak instance usage of your workload over time.

Viewing idle resource recommendations

Compute Optimizer helps you identify idle resources that can be deleted or stopped to reduce your AWS cloud costs. Idle recommendations can be accessed through the Compute Optimizer console and our <u>set of APIs</u>. Idle recommendations are available for the following supported AWS resources:

- Amazon EC2 instances
- Amazon EC2 Auto Scaling groups
- · Amazon EBS volumes
- Amazon ECS services on Fargate
- Amazon Aurora and RDS databases

The recommendations are refreshed daily. These recommendations are generated by analyzing the specifications and utilization metrics of your AWS resources over the lookback period. The lookback period depends on the supported resource and your recommendation preference settings. If you

Idle resource recommendations 146

don't have any recommednation preferences set, we use the default lookback period of 14 days. For more information, see Idle criteria per resource.



Note

For EBS volumes we analyze the attachment status over a 32-day lookback period.

Contents

- Idle criteria per resource
- Estimated monthly savings

Idle criteria per resource

Each of the supported resources eligible for idle recommendations has its own criteria to be found idle. The following table breaks down the idle criteria for each resource and also provides Compute Optimizer's recommended action for the idle resource.

Resource	Metric analyzed	Idle criteria	Recommended action
Amazon EC2 instances	CPU utilization, network IO, GPU utilization, GPU encoder usage, and GPU memory usage	The peak CPU utilizati on is below 5% and your network I/O is less than 5MB/day over the 14-day lookback period. G or P instance types are considered idle if they meet the following criteria over the 14-day lookback period: GPU isn't actively working for more than 99% of the lookback period	Verify whether you need this instance. If you don't need it, consider deleting this instance.

Resource	Metric analyzed	Idle criteria	Recommended action
		 GPU encoder isn't used for 99% or more of the instance's runtime 	
		 GPU memory usage at instance level is less than 5% 	
		 CPU maximum utilizati on is less than 5% 	
		 Network utilization is less than 5 MB/day 	

Resource	Metric analyzed	Idle criteria	Recommended action
EC2 Auto Scaling groups	CPU utilization, network IO, GPU utilization, GPU encoder usage, and GPU memory usage	The EC2 Auto Scaling group has no instances with more than 5% peak CPU utilization or 5 MB/day network utilization over the 14-day lookback period.	Verify whether you need this group. Consider scaling down this group to one instance or consider deleting it.
		EC2 Auto Scaling groups that use G or P instance types are considered idle if the instances meet the following criteria over the 14-day lookback period:	
		 GPU isn't actively working for more than 99% of the lookback period 	
		• GPU encoder isn't used for 99% or more of the instance's runtime	
		 GPU memory usage at instance level is less than 5% 	
		• CPU maximum utilizati on is less than 5%	
		 Network utilization is less than 5 MB/day 	

Resource	Metric analyzed	Idle criteria	Recommended action
Amazon EBS volumes	Read/Write operations and attachment status	Compute Optimizer can find an EBS volume to be idle or unattached. • Idle — If the read/writ e operation is less than 1 IOPS per day over the 14-day lookback period. • Unattached — If the volume isn't attached to any EC2 instance over the 32-day lookback period.	Verify whether you need this volume. If you don't need it, we recommend that you create a snapshot of the volume and consider deleting it.
Amazon ECS services on Fargate	CPU utilization and memory utilization	The peak CPU and memory utilization is below 1% over the 14-day lookback period.	Verify whether your containerized application is running as expected. If the application is not running, consider deleting this service.

Resource	Metric analyzed	Idle criteria	Recommended action
Amazon Aurora and RDS databases	Database connections, read/write IOPS, and CPU utilization	RDS for MySQL and RDS for PostgreSQL The DB instance is not a read replica, and had no database connections, low CPU usage, and low read/write activity over the lookback period. Aurora MySQL and Aurora PostgreSQL The DB instance is not part of a secondary cluster in an Aurora Global Database, and had no database connections, low CPU usage, and low read/write activity over the lookback period.	Verify whether you need this DB instance. If you don't need this instance temporarily, you can stop RDS MySQL and RDS PostgreSQL DB instances for up to 7 days. If you no longer need this instance, you can create a DB snapshot and delete the instance. For idle Aurora MySQL and Aurora PostgreSQL instances, you can also change the DB instance class to db.serverless.

Estimated monthly savings

Estimated monthly savings (after discounts)

This column lists the approximate monthly cost savings that you experience by taking Compute Optimizer's recommended action per idle resource under the supported pricing models. The supported pricing models depends on the specific AWS resource. For example, EC2 instances supports Savings Plans and Reserved Instances discounts but ECS services only supports the Savings Plans pricing model. To receive recommendations with supported pricing models, the savings estimation mode preference needs to be activated. For more information, see Savings estimation mode.

Estimated monthly savings 151



Note

If you don't activate the savings estimation mode preference, this column on both the Instance and Storage tabs display the default On-Demand pricing discount information.

Estimated monthly savings (On-Demand)

This column lists the approximate monthly cost savings that you experience by taking Compute Optimizer's recommended action per idle resource under the On-Demand pricing model.



If you enable Cost Optimization Hub in AWS Cost Explorer, Compute Optimizer uses Cost Optimization Hub data, which includes your specific pricing discounts, to generate your recommendations. If Cost Optimization Hub isn't enabled, Compute Optimizer uses Cost Explorer data and On-Demand pricing information to generate your recommendations. For more information, see Enabling Cost Explorer and Cost Optimization Hub in the in the AWS Cost Management User Guide.

Estimated monthly savings 152

Recommendation preferences

Recommendation preferences are features that you can activate so that Compute Optimizer generates resources recommendations that align more with your workload requirements. Following are the features that are currently available as recommendation preferences in Compute Optimizer.

- Rightsizing recommendation preferences
- Enhanced infrastructure metrics
- External metrics ingestion
- Inferred workload type
- Savings estimation mode
- AWS Graviton-based instance recommendations

Rightsizing recommendation preferences

The rightsizing recommendation preferences feature allows you to customize the settings you want Compute Optimizer to consider when generating your Amazon EC2, EC2 Auto Scaling group, and Aurora and RDS database recommendations. This feature allows you to do the following:

- Adjust both the headroom and threshold of your CPU utilization
- Adjust the headroom of your memory utilization
- Configure a specific lookback period option
- Set instance family preferences at the organization, account, or regional level

This provides you with greater transparency on how your recommendations are generated, and the ability for you to configure resource rightsizing recommendations for higher savings and performance sensitivity. For instructions on how to set your rightsizing recommendation preferences in AWS Compute Optimizer, see Setting your rightsizing recommendation preferences.

If you're the account manager or the delegated administrator of an AWS Organization, you can choose the account or organization you want the rightsizing recommendation preferences to be applied to. If you're an individual AWS account holder (not within an organization), the rightsizing recommendation preferences you set only apply to your recommendations.

Rightsizing preferences 153



Note

 The rightsizing preferences for CPU and memory utilization are only available for Amazon EC2 instances.

For RDS DB instances, you can only specify lookback period preferences.

Preferred EC2 instances

Rightsizing recommendation preferences allows you to specify the EC2 instances you want in your recommendation output. You can define a custom instance consideration set which controls the instance types and families recommended by Compute Optimizer for migration. This preference ensures that Compute Optimizer only recommends instances that are aligned with your specific requirements. This doesn't prevent Compute Optimizer from generating recommendations for any of your workloads.

You can customize your instance type selection based on your organizational guidelines or requirements. For example, if you have purchased Savings Plans and Reserved Instances, you can specify instances only covered by those pricing models. Or, if you only want to use instances equipped with certain processors or non-burstable instances due to your application design, you can specify those instances for your recommendation output.

This feature also gives you the option to automatically consider future variations of your chosen instance families. This ensures that your preferences are using the latest version of your preferred instance families which can provide the best price-to-performance ratio. For instructions on how to specify your preferred EC2 instances, see Step 3: Specify preferred EC2 instances in the next section of this user guide.



Note

We recommend that you avoid limiting instance candidates too much. This can reduce your potential savings and rightsizing opportunities.

Lookback period and metrics

Rightsizing recommendation preferences allows you to specify the lookback period, and the CPU and memory utilization preferences you want Compute Optimizer to use when generating

Preferred EC2 instances 154

your custom recommendations. For instructions on how to set your lookback period and metrics utilization, see Step 4: Specify lookback period and metrics in the next section of this user guide.

Topics

- Lookback period
- CPU and memory utilization

Lookback period

Choose a metric analysis lookback period for your rightsizing recommendation preferences. Compute Optimizer analyzes your utilization preference settings for the number of days that you specify. We recommend that you set a lookback period that captures critical signals from your workload utilization history which can allow Compute Optimizer to identify rightsizing opportunities with higher savings and lower performance risk.

In Compute Optimizer, you can choose from the following lookback period options: 14 days (default), 32 days, or 93 days. The 14-day and 32-day lookback periods require no additional payments. If you have monthly cycles, the 32-day lookback period can capture monthly workload patterns. The 93-day lookback period requires additional payment. To use the 93-day option, you need to enable the enhanced infrastructure metrics preference. For more information, see Enhanced infrastructure metrics.



Note

For RDS DB instances, you can only specify lookback period preferences.

CPU and memory utilization

The rightsizing recommendation preferences feature allows you to customize your utilization settings: CPU threshold, CPU headroom, and memory headroom so your instance recommendations meet your specific workload requirements. Depending on the utilization settings you choose, your recommendations can be tailored to increased savings opportunities, more performance headroom, or have a higher tolerance for performance risks.

CPU utilization threshold

Threshold is the percentile value that Compute Optimizer uses to process utilization data before generating recommendations. If you set a CPU threshold preference, Compute Optimizer removes

the peak usage data points above this threshold. A lower percentile value removes more peak usage from the data.

Compute Optimizer offers three options for CPU utilization threshold: P90, P95, and P99.5. By default, Compute Optimizer uses a P99.5 threshold for its rightsizing recommendations. This means that Compute Optimizer only ignores the top 0.5% of the highest utilization data points from your utilization history. The P99.5 threshold might be more suited for highly sensitive production workloads where peak utilization significantly affects application performance. If you set the utilization threshold to P90, Compute Optimizer ignores the top 10% of your highest data points from your utilization history. P90 might be a suitable threshold for workloads less sensitive to peak utilization, such as non-production environments.

CPU utilization headroom

Utilization headroom is added CPU capacity within Compute Optimizer's recommendation to account for any future increases in CPU usage requirements. It represents the gap between the instance's current usage and its maximum capabilities.

Compute Optimizer provides three options for CPU utilization headroom: 30%, 20%, and 0%. By default, Compute Optimizer uses a 20% headroom for its rightsizing recommendations. If you need additional capacity to account for any unexpected future increases in CPU utilization, you can set the headroom to 30%. Or, suppose that your utilization is expected to remain constant with a low chance of future increases, then you can reduce the headroom. This generates recommendations with less added CPU capacity and increased cost savings.

Memory utilization headroom

Memory utilization headroom is added memory capacity within Compute Optimizer's recommendation to account for any future increases in memory usage. It represents the gap between the instance's current usage and its maximum capabilities. Compute Optimizer provides three options for memory utilization headroom: 30%, 20%, and 10%. By default, Compute Optimizer uses a 20% headroom for its rightsizing recommendations. If you need additional capacity to account for any unexpected future increases in memory utilization, you can set the headroom to 30%. Or, suppose that your usage is expected to remain constant with a low chance of future increases, then you can reduce the headroom. This generates recommendations with less added memory capacity and increased cost savings.



Note

To receive EC2 instance recommendations that consider the memory utilization metric, you need to enable memory utilization with the CloudWatch agent. You can also configure Compute Optimizer to ingest EC2 memory utilization metrics from your preferred observability product. For more information, see Enabling memory utilization with the CloudWatch agent and Configure external metrics ingestion.

Utilization presets

Compute Optimizer provides four preset options for CPU and memory utilization:

- Maximum savings CPU threshold is set to **P90**, CPU headroom is set to **0**%, and memory headroom is set to 10%. This provides recommendations with no added CPU capacity and reserves the lowest added memory capacity for future usage growth. It also removes the top 10% of the highest data points from your CPU utilization history. As a result, this preset might generate recommendations with a higher latency or greater degradation risk.
- Balanced CPU threshold is set to P95, CPU headroom is set to 30%, and memory headroom is set to 30%. The recommendations target CPU utilization to remain below 70% for more than 95% of the time, and target memory utilization to remain below 70%. This is suitable for most workloads and can identify more savings opportunities than the default settings. If your workloads aren't particularly sensitive to CPU or memory utilization spikes, this is a good alternative to the default settings.
- Default Compute Optimizer uses a P99.5 CPU threshold, a 20% CPU headroom, and a 20% memory headroom to generate recommendations for all EC2 instances. These settings aim to ensure that CPU utilization remains below 80% for more than 99.5% of the time, and target memory utilization to remain below 80%. This provides a very low risk of performance issues but potentially limits savings opportunities.
- Maximum performance CPU threshold is set to P99.5, CPU headroom is set to 30%, and memory headroom is set to **30%**. This provides recommendations with high performance sensitivity and added capacity for future increases in CPU and memory usage.




Note

Compute Optimizer might update these threshold and headroom values to reflect the latest technological updates and maintain recommendation quality. Compute Optimizer

might adjust your chosen parameters based on your workload characteristics to ensure suitable instance recommendations for you.

You can use the simulated graphs in the console to get a representation of how your CPU and memory usage interacts with the threshold and headroom settings across the lookback period. The graph displays how the threshold and headroom values you set are applied to utilization data of the example workload before Compute Optimizer uses the data to generate recommendations. As you adjust the headroom and threshold, the graph updates to show how Compute Optimizer generates recommendations based on your custom preferences.

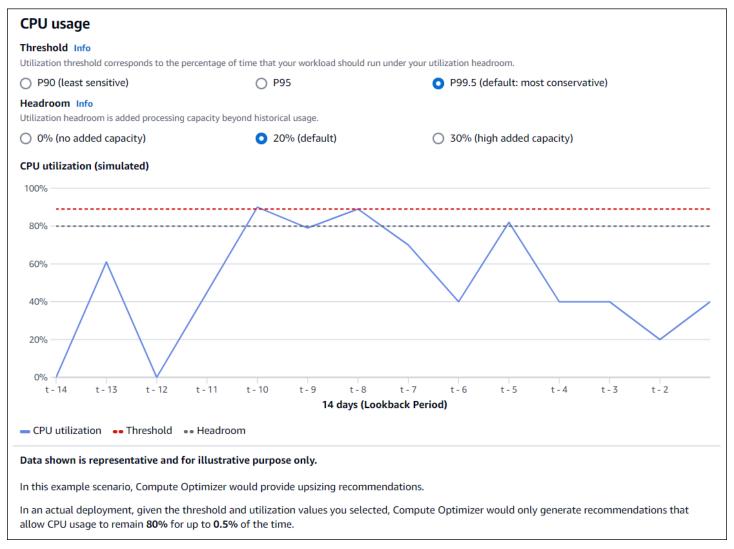

The data shown in the simulated graph is representative and for illustrative purposes only. The graph isn't based on your utilization data.

Next steps

For instructions on how to set your rightsizing recommendation preferences in AWS Compute Optimizer, see Setting your rightsizing recommendation preferences.

Setting your rightsizing recommendation preferences

This section provides you with instructions on how to set your rightsizing recommendation preferences in AWS Compute Optimizer.

Procedure

Steps

- Step 1: Set preference level (Organizations only)
- Step 2: Set regional scope
- Step 3: Specify preferred EC2 instances
- Step 4: Specify lookback period and metrics

Step 1: Set preference level (Organizations only)

If you're the account manager or the delegated administrator of your organization, you can choose all the accounts in an organization or specific accounts to which you want to apply rightsizing recommendation preferences.




Note

If you're an individual AWS account holder, skip to Step2: Regional scope.

Next steps 159

To set the preference level for your rightsizing recommendation preferences

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose **Rightsizing** in the navigation pane.
- 3. Choose the resource type you want from the **Resource type** dropdown menu.
- 4. In your chosen resource section, choose the **All opted-in accounts** dropdown menu.
 - To opt in all member accounts, choose **All opted-in accounts** from the Preference level dropdown.
 - To opt in an individual member account, choose **Choose account** from the Preference level dropdown. In the prompt that appears, select the account you want to opt in for rightsizing preferences. Then, choose **Set account level**.




Step 2: Set regional scope

In this step you can specify the AWS Regions where you want Compute Optimizer to apply your rightsizing recommendation preferences. For example, if you select the US East (N. Virginia) Region and US East (Ohio) Region, we only apply the preferences to those Regions.

To set the regional scope of your rightsizing recommendation preferences

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose **Rightsizing** in the navigation pane.
- 3. Choose the resource type you want from the **Resource type** dropdown menu.
- 4. On the **Rightsizing preferences** page, choose **Edit**.
- 5. Choose either **Any Region** or **Custom Regions** based on your requirements.

6. If you choose **Custom Regions**, select the AWS Regions where you want Compute Optimizer to apply your preferences. Then, choose **Next**.

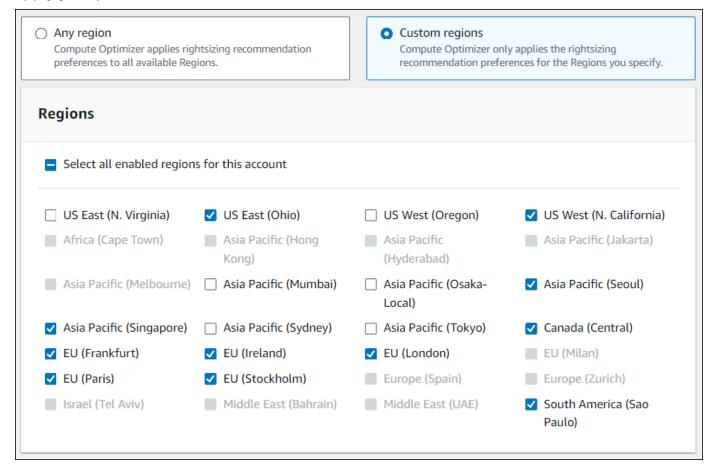

Step 3: Specify preferred EC2 instances


Use the following procedure to specify your preferred instance types and sizes for member accounts of an organization or an individual AWS account holder.

To set the instances you want in your recommendation output


- 1. Follow the steps outlined in Step2: Regional scope.
- On the Preferred EC2 instances page, choose either Any instance type (default) or Limit to specific instance types and sizes based on your requirements.
- 3. If you choose **Limit to specific instance types and sizes**, select the instance types you want in your recommendation output.

• Use the **Search by instance families** dropdown menu. When you select any of the instance families, the list only displays the available instance types within those families that you selected.

• Use the **Find instance types** search bar to enter the specific instance types you want.

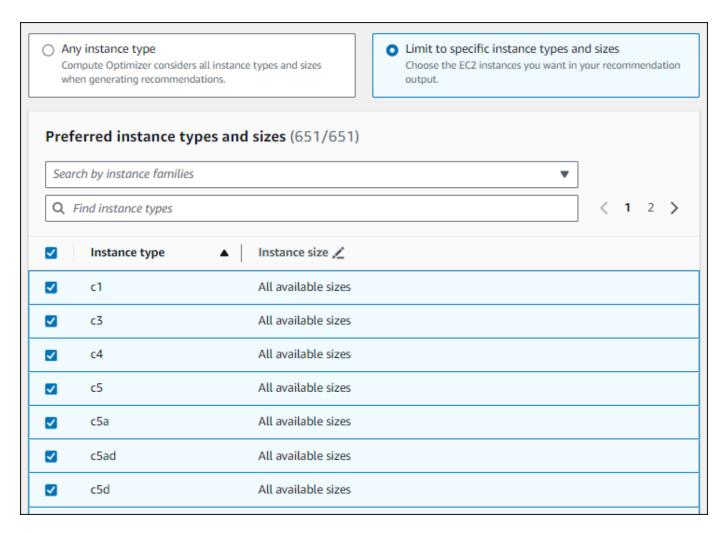

- 4. (Optional) To specify the sizes of each instance type, do the following:
 - 1. Choose the edit icon on the instance type you want.
 - 2. Select **X** on the instance sizes that you don't want.
 - 3. Select **✓** to confirm your selections.
- (Optional) If you don't want Compute Optimizer to automatically consider future variations
 of your chosen instance families, turn off Automatically consider future variations of the
 instance families selected.

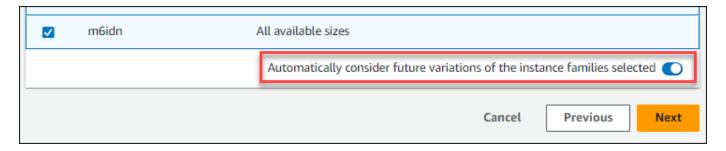

6. Choose Next.


Step 4: Specify lookback period and metrics

Use the following procedure to specify the lookback period, and the CPU and memory utilization preferences you want Compute Optimizer to use when generating your custom recommendations.

To set the lookback period, and CPU and memory preferences

- 1. Follow the steps outlined in Step 4: Preferred EC2 instances.
- 2. On the **Lookback period and metrics** page, choose a lookback period option based on your requirements.
 - If you want to use the 93-day lookback period (paid feature), you need to enable the
 enhanced infrastructure metrics preference. To do this, choose Enable enhanced
 infrastructure metrics. Then, in the prompt that appears, choose Enable enhanced
 infrastructure metrics.
 - If the enhanced infrastructure metrics preference is already enabled and you want to choose a 14-day or 32-day lookback period, you need to disable the enhanced infrastructure metrics preference. To do this, choose **Disable enhanced infrastructure metrics**. Then, in the prompt that appears, choose **Disable enhanced infrastructure metrics**.
- 3. Choose a utilization preset: Max savings, Balanced, Default, or Max performance.

Alternatively, you can customize your own specific CPU and memory utilization preferences.

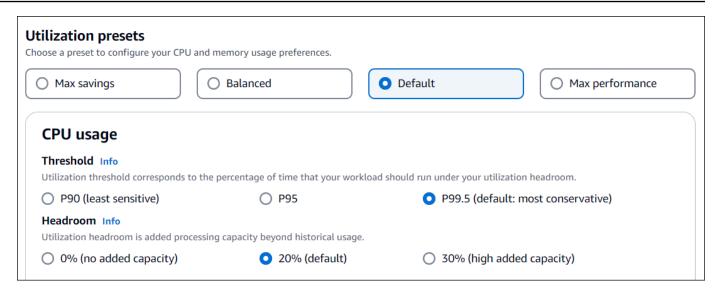

- 4. Choose **Next**.
- On the Review and save page, review all the preferences you have set. Then, choose Save preferences.

Within 24 hours your new recommendations start to appear with the rightsizing preferences that you set.

Enhanced infrastructure metrics

Enhanced infrastructure metrics is a paid feature of Compute Optimizer that applies to Amazon EC2 instances, instances that are part of EC2 Auto Scaling groups, and Amazon RDS DB instances. This recommendation preference extends the utilization metrics analysis lookback period to up to 93 days, compared to the default 14-day period. This gives Compute Optimizer a longer history of utilization metrics data to analyze. You need to activate the enhanced infrastructure metrics preference. For more information, see Organization, account, and resource level.

Required permissions

You must have the appropriate permissions to activate and deactivate enhanced infrastructure metrics. For more information, see <u>Policies to grant access to manage Compute Optimizer</u> recommendation preferences.

Enhanced infrastructure metrics 164

Organization, account, and resource level

You can activate enhanced infrastructure metrics using the Compute Optimizer console, AWS Command Line Interface (AWS CLI), and AWS SDKs. In the console, you can activate the feature in the following three areas, with each providing a different level of activation.

• At the resource level, you can activate enhanced infrastructure metrics for the individual resource that you're viewing. For example, the **Instance details** page for an individual EC2 instance provides the option to activate the enhanced infrastructure metrics feature only for that EC2 instance. For more information, see Activating enhanced infrastructure metrics at the resource level later in this guide.

Note

Resource-level preferences override account-level preferences, and account-level preferences override organization-level preferences. For an EC2 instance that is part of an EC2 Auto Scaling group, the EC2 Auto Scaling group recommendation preference overrides that of the individual instance.

- For an individual AWS account holder, you can activate the enhanced infrastructure metrics feature for all EC2 instances in the account that meet your resource type and AWS Region criteria. EC2 instance preferences at the account level apply to standalone instances and instances that are part of EC2 Auto Scaling groups. For more information, see Activating enhanced infrastructure metrics at the organization or account level later in this guide.
- The account manager or the delegated administrator of an AWS Organization can activate the enhanced infrastructure metrics feature for all resources in all member accounts of the organization that meet your resource type and AWS Region criteria. EC2 instance preferences at the organization level apply to standalone instances and instances that are part of EC2 Auto Scaling groups in all member accounts. For more information, see Activating enhanced infrastructure metrics at the organization or account level later in this guide.

After you activate the enhanced infrastructure metrics feature, Compute Optimizer applies the preference the next time recommendations are refreshed. This can take up to 24 hours. To confirm that your resource recommendations have enhanced infrastructure metrics enabled, see Confirming the status of enhanced infrastructure metrics.

Compute Optimizer considers updated preferences the next time that it generates recommendations. Until then, a **pending** status is affixed to your update preference (for example, **Active-pending** or **Inactive-pending**). To confirm if your resource recommendations are taking enhanced infrastructure metrics into consideration, see <u>Confirming the status of enhanced</u> infrastructure metrics.

Confirming the status of enhanced infrastructure metrics

After you activate the enhanced infrastructure metrics recommendation preference, Compute Optimizer applies the preference the next time that recommendations are refreshed. This can take up to 24 hours. The **Effective enhanced infrastructure metrics** column in the Resource Recommendations page confirms that the recommendations listed are taking the three-month look-back period into consideration. An **Active** status confirms the recommendation listed is considering the longer look-back period. An **Inactive** status confirms that the recommendation isn't yet considering the longer look-back period.

Next steps

For instructions on how activate or deactivate enhanced infrastructure metrics at the resource level, see Activating enhanced infrastructure metrics at the resource level.

For instructions on how activate or deactivate enhanced infrastructure metrics at the organization or account level, see <u>Activating enhanced infrastructure metrics at the organization or account</u> level.

Activating enhanced infrastructure metrics at the resource level

This section provides you with instructions on how to activate or deactivate enhanced infrastructure metrics at the resource level. Recommendation preferences activated at the resource level apply only to the individual resource.

Prerequisites

Make sure that you have the appropriate permissions to activate and deactivate enhanced infrastructure metrics. For more information, see <u>Policies to grant access to manage Compute</u> Optimizer recommendation preferences.

Next steps 166

Procedure

To activate or deactivate enhanced infrastructure metrics at the resource level

Open the Compute Optimizer console at https://console.aws.amazon.com/compute-1. optimizer/.

2. In the left navigation pane under **Recommendations** and **Rightsizing**, choose the resource type that you want to activate or deactivate enhanced infrastructure metrics.



Note

For an EC2 instance that's part of an EC2 Auto Scaling group, the EC2 Auto Scaling group recommendation preference overrides the preference of the individual instance.

- In the resource recommendations page, select the resource for which you want to activate or deactivate enhanced infrastructure metrics. Then, choose **View details**.
- 4. In the **Recommendation preferences** section of the **Resource details** page, choose **Enhanced** infrastructure metrics.
- In the prompt that appears, select the **Enhanced infrastructure metrics paid feature** checkbox. Then, choose **Save** to activate enhanced infrastructure metrics for the resource.
- (Optional) If you want to deactivate the the enhanced infrastructure metrics, unselect the **Enhanced infrastructure metrics - paid feature** checkbox. Then, choose **Save**.



Note

Saving the preference initiates metering for enhanced infrastructure metrics for the individual resource. For more information about pricing for this feature, see Compute Optimizer pricing.

Compute Optimizer considers updated preferences the next time that it generates recommendations. Until then, a pending status is affixed to your updated preference (for example, Active-pending or Inactive-pending). To confirm if your resource recommendations are taking enhanced infrastructure metrics into consideration, see Confirming the status of enhanced infrastructure metrics.

Additional resources

Troubleshooting — Failed to get or update enhanced infrastructure metrics recommendation preferences

· Activating enhanced infrastructure metrics at the organization or account level

Activating enhanced infrastructure metrics at the organization or account level

This section provides you with instructions on how to activate or deactivate enhanced infrastructure metrics for member accounts of an AWS Organization or an individual AWS account holder.


Prerequisites

Make sure that you have the appropriate permissions to activate and deactivate enhanced infrastructure metrics. For more information, see <u>Policies to grant access to manage Compute</u> Optimizer recommendation preferences.

Procedure

To activate or deactivate enhanced infrastructure metrics at the organization or account level

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- Choose General in the navigation pane. Then, choose the Enhanced infrastructure metrics tab.
- 3. If you're an individual AWS account holder, skip to step 4.
 - If you're the account manager or delegated administrator of your organization, you can manage all member accounts or an individual member account for enhanced infrastructure metrics.
 - To opt in all member accounts, choose **All opted-in accounts** from the Preference level dropdown.
 - To opt in an individual member account, choose **Choose account** from the Preference level dropdown. In the prompt that appears, select the account you want to opt in for rightsizing preferences. Then, choose **Set account level**.

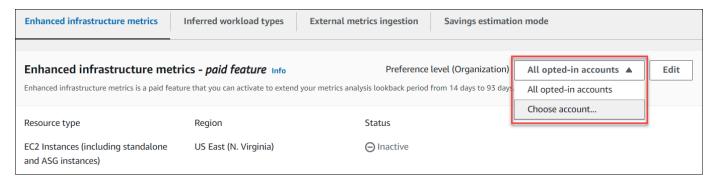

- 4. Choose Edit.
- 5. In the prompt that appears, choose **Add a preference**.
- 6. Select a **Resource type**, **Region**, and the **Activate** checkbox. Then, choose **Save**.
- 7. (Optional) If you want to deactivate enhanced infrastructure metrics, unselect the **Activate** checkbox. Then, choose **Save**.

Compute Optimizer considers updated preferences the next time that it generates recommendations. Until then, a **pending** status is affixed to your update preference (for example, **Active-pending** or **Inactive-pending**). To confirm that your resource recommendations are taking enhanced infrastructure metrics into consideration, see <u>Confirming the status of enhanced infrastructure metrics</u>.

Additional resources

- Troubleshooting <u>Failed to get or update enhanced infrastructure metrics recommendation</u> preferences
- Activating enhanced infrastructure metrics at the resource level

External metrics ingestion

You can use the external metrics ingestion feature to configure AWS Compute Optimizer to ingest EC2 memory utilization metrics from one of the four observability products: Datadog, Dynatrace, Instana, and New Relic. When you enable external metrics ingestion, Compute Optimizer analyzes your external EC2 memory utilization metrics in addition to your CPU, disk, network, IO, and throughput data to generate EC2 rightsizing recommendations. These recommendations can provide you with additional savings and enhanced performance. For more information, see Configuring external metrics ingestion.

External metrics ingestion 169



Note

External metrics ingestion doesn't support EC2 instances that are part of EC2 Auto Scaling groups.

Metric requirements

To generate EC2 rightsizing recommendations with external memory utilization metrics, Compute Optimizer requires at least 30 consecutive hours of memory utilization metrics from your observability product. If you don't have enough hours of external memory utilization metrics, Compute Optimizer analyzes and generates recommendations from your CloudWatch metrics until you reach the external memory metric requirements.



Note

When external metrics ingestion is enabled, Compute Optimizer prioritizes your external memory utilization metrics over your CloudWatch memory data. If you opt out of external metrics ingestion, Compute Optimizer defaults back to analyze and generate recommendations based on your CloudWatch metrics.

Organization and account level

You can configure external metric ingestion at both the organization and account level. If you're a member account of an AWS organization that configured external metrics ingestion, you can opt out of this feature. For more information, see Opting out of external metrics ingestion.

Suppose that you're a new member of an AWS organization that already configured external metrics ingestion. Then, you must configure external metrics ingestion for your AWS account manually. For more information, see Configuring external metrics ingestion.

Next steps

For instructions on how to configure external metric ingestion, see Configuring external metrics ingestion.

170 Metric requirements

Configuring external metrics ingestion

This section provides you with instructions on how to configure external metric ingestion. You can configure external metric ingestion using the Compute Optimizer console or the AWS CLI.

Prerequisites

Make sure that you understand the metric requirments in order for Compute Optimizer to generate EC2 rightsizing recommendations with external memory utilization. For more information, see Metric requirements.

Procedure


Console

To configure external metrics ingestion

- Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose **General** in the navigation pane. Then, choose the **External metrics ingestion** tab.
- 3. If you're an individual AWS account holder, skip to step 4.

If you're the account manager or delegated administrator of your organization, you can opt-in all member accounts or an individual member account for external metrics ingestion.


- To opt-in all member accounts, choose **All opted-in accounts** from the Preference level dropdown.
- To opt-in an individual member account, choose **Choose account** from the Preference level dropdown. In the prompt that appears, select the account you want to opt-in. Then, choose **Set account level**.



Choose Edit.

In the prompt that appears, select your external metrics provider for EC2 instances. Then, choose Enable.

Navigate to your external metrics provider's website. To do this, choose **Configure with** provider or the external metrics source link.



Complete the configuration process on your external metrics provider's website.



Important

If you don't complete the configuration process with your external metrics provider, Compute Optimizer can't receive your external metrics.

CLI


To configure external metrics ingestion

- Open a terminal or command prompt window. 1.
- 2. Call the following API operation.
 - Replace *myRegion* with the source AWS Region.
 - Replace 123456789012 with your account ID.
 - Replace ExternalMetricsProvider with your external metrics provider.

```
aws compute-optimizer put-recommendation-preferences --region myRegion --
resource-type=Ec2Instance --scope='{"name":"AccountId", "value":"123456789012"}'
 --external-metrics-preference='{"source":"ExternalMetricsProvider"}'
```

- Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.
- Choose **Accounts** in the navigation pane.

In the Organization-level preferences for external metrics ingestion or the Accountlevel preferences for external metrics ingestion section, navigate to your external metrics provider's website. To do this, choose Configure with provider or the external metrics source link.



Complete the configuration process on your external metrics provider's website.



Important

If you don't complete the configuration process with your external metrics provider, Compute Optimizer can't receive your external metrics.

Additional resources

- Opting out of external metrics ingestion
- External metrics ingestion

Opting out of external metrics ingestion

This section provides you with instructions on how to opt out of external metric ingestion. You can opt out external metric ingestion using the Compute Optimizer console or the AWS CLI.

Procedure

Console

To opt out of external metric ingestion

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.
- 2. Choose **General** in the navigation pane. Then, choose the **External metrics ingestion** tab.
- If you're an individual AWS account holder, skip to step 4.

If you're the account manager or delegated administrator of your organization, you can opt out all member accounts or an individual member account for external metrics ingestion.

- To opt out all member accounts, choose All opted-in accounts from the Preference level dropdown.
- To opt out an individual member account, choose **Choose account** from the Preference level dropdown. In the prompt that appears, select the account you want to opt out. Then, choose **Set account level**.
- 4. Choose Edit.
- 5. In the prompt that appears, select **No external metrics provider**. Then, choose **Confirm**.

CLI

To opt out of external metric ingestion

- 1. Open a terminal or command prompt window.
- 2. Call the following API operation.
 - Replace *myRegion* with the source AWS Region.
 - Replace 123456789012 with your account ID.

```
aws compute-optimizer delete-recommendation-preferences --
region myRegion --resource-type=Ec2Instance --recommendation-preference-
names='["ExternalMetricsPreference"]' --scope='{"name":"AccountId",
    "value":"123456789012"}'
```

Additional resources

- Configuring external metrics ingestion
- External metrics ingestion

Inferred workload type

Inferred workload type is a feature that's included with AWS Compute Optimizer that infers the applications that might be running on your AWS resources, such as EC2 instances and EC2 Auto Scaling groups. Inferred workload type does this by analyzing the attributes of your resources. These resources include resource names, tags, and configuration. Compute Optimizer currently can infer if your instances are running Amazon EMR, Apache Cassandra, Apache Hadoop, Memcached, NGINX, PostgreSQL, Redis, Kafka, or SQL Server. By inferring the applications that are running on your instances, Compute Optimizer can identify the effort to migrate your workloads from x86-based instance types to Arm-based AWS Graviton instances types. By default, the inferred workload type feature is activated. But, you can create a recommendation preference to deactivate the feature.



Note

You can't infer the SQL Server application in the Middle East (Bahrain), Africa (Cape Town), Asia Pacific (Hong Kong), Europe (Milan), and Asia Pacific (Jakarta) Regions.

The inferred workload types and migration effort are listed in the Inferred workload types and Migration effort columns of the EC2 instances and EC2 Auto Scaling groups recommendations pages. For more information, see Viewing EC2 instance recommendations and Viewing EC2 Auto Scaling group recommendations.

Required permissions

You must have the appropriate permissions to activate the inferred workload type feature. For more information, see Policies to grant access to manage Compute Optimizer recommendation preferences.

Organization and account level

By default, inferred workload type is activated. However, you can create a recommendation preference to deactivate the feature. You can deactivate inferred workload type using the Compute Optimizer console, AWS Command Line Interface (AWS CLI), or AWS SDKs. In the console, you can deactivate the feature in the following areas. Deactivating in each area provides a different level of deactivation.

Inferred workload type 175

• For an individual AWS account holder, you can deactivate the inferred workload type feature for all AWS resources in the account that meet your AWS Region criteria. For more information, see Activating inferred workload type

• The account manager or the delegated administrator of an AWS Organization can deactivate the inferred workload type feature for all resources in all member accounts of the organization that meet your AWS Region criteria. For more information, see Activating inferred workload type.

After you deactivate the inferred workload type feature, Compute Optimizer stops inferring workload types the next time that recommendations are refreshed. This can take up to 24 hours to take effect.

Next steps

For instructions on how to activate inferred workload type, see Activating inferred workload type.

Activating inferred workload type

This section provides you with instructions on how to activate the inferred workload type feature for member accounts of an AWS Organization or an individual AWS account holder.

Prerequisites

Make sure that you have the appropriate permissions to activate the inferred workload type feature. For more information, see <u>Policies to grant access to manage Compute Optimizer recommendation preferences</u>.

Procedure

To activate the inferred workload type feature for member accounts of an AWS Organization or an individual AWS account holder


- Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose **General** in the navigation pane. Then, choose the **Inferred workload type** tab.
- 3. If you're an individual AWS account holder, skip to step 4.

If you're the account manager or delegated administrator of your organization, you can manage all member accounts or an individual member account for inferred workload type.

Next steps 176

• To opt in all member accounts, choose **All opted-in accounts** from the Preference level dropdown.

• To opt in an individual member account, choose **Choose account** from the Preference level dropdown. In the prompt that appears, select the account you want to opt in for rightsizing preferences. Then, choose **Set account level**.

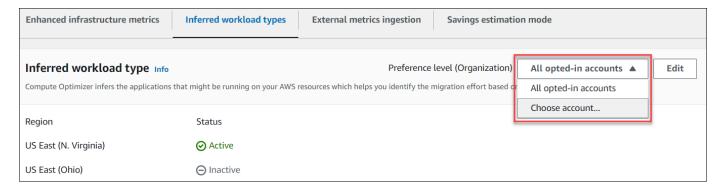

- 4. Choose Edit.
- 5. To deactivate the inferred workload type preference in an AWS Region, unselect the **Activate** checkbox. Then, choose **Save**.
- 6. (Optional) If you want to activate the inferred workload type preference in an AWS Region select the **Activate** checkbox. Then, choose **Save**..
- (Optional) To add a new inferred workload type preference in an AWS Region, choose Add a
 preference. Then, select a Region and the Activate checkbox. Finally, choose Save.

Additional resources

- Opting out of external metrics ingestion
- External metrics ingestion

Savings estimation mode

The savings estimation mode preference allows Compute Optimizer to analyze specific pricing discounts when generating the estimated cost savings of rightsizing recommendations. Compute Optimizer offers the savings estimation mode for the following pricing discounts per AWS resource:

Savings estimation mode 177

 Amazon EC2 and EC2 Auto Scaling group instances — Savings Plans and Reserved Instances pricing discounts.

- AWS Lambda functions and Amazon ECS services Saving Plans pricing discounts.
- Amazon EBS volumes other specific pricing discounts.
- Aurora and RDS databases Reserved Instances pricing discounts and other specific pricing discounts.

Note

The savings estimation mode preference is only available for accounts within AWS Organizations that enable Cost Optimization Hub in AWS Cost Explorer. For more information, see Cost Optimization Hub in the AWS Cost Management User Guide.

Only the account manager or delegated administrator of your organization can activate member accounts in specific AWS Regions to receive recommendations with pricing discounts. For the account manager and the delegated administrator, the savings estimation mode preference is activated by default.

If the savings estimation mode preference isn't activated, Compute Optimizer only uses the default On-Demand pricing information.

Next steps

For instructions on how to activate or deactivate the savings estimation mode preference for member accounts, see Activating savings estimation mode.

Activating savings estimation mode

This section provides you with instructions on how to activate or deactivate the savings estimation mode preference for member accounts within specific AWS Regions.


Procedure

To activate savings estimation mode


Open the Compute Optimizer console at https://console.aws.amazon.com/compute-1. optimizer/.

Next steps 178

- 2. Choose **General** in the navigation pane.
- 3. Choose the **Savings estimation mode** tab. Then, choose **Edit**.

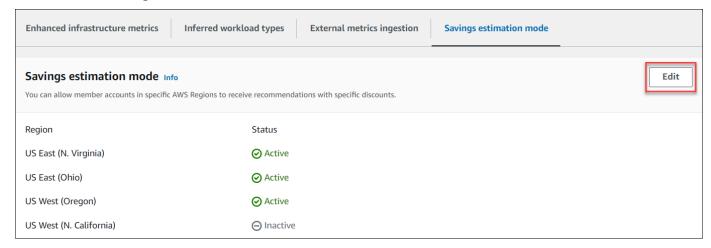

4. In the pop-up window that appears, select the AWS Regions where you want to activate the savings estimation mode preference. Then, choose **Save**.

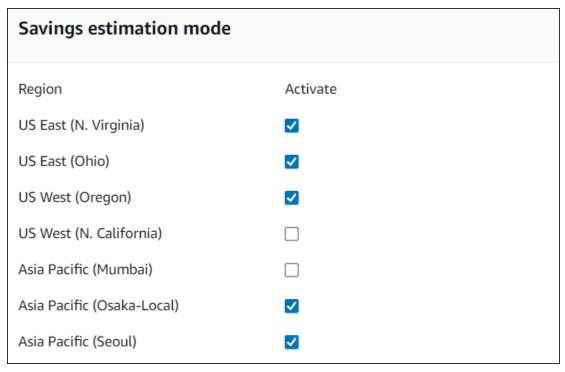

5. (Optional) Unselect the AWS Regions where you want to deactivate the savings estimation mode preference.

When you activate the savings estimation mode preference, it can take up to 24 hours for your new recommendations with specific discounts to appear. You can view your specific discount

recommendations in the **Estimated monthly savings (after discounts)** column of a given AWS resource. For more information, see Estimated monthly savings and savings opportunity.

AWS Graviton-based instance recommendations

When viewing Amazon EC2 instance, EC2 Auto Scaling group, and Aurora and RDS database recommendations, you can view the price and performance impact of running your workload on AWS Graviton-based instances.

To view recommendations for AWS Graviton-based instances

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose **EC2 instances**, **EC2 Auto Scaling groups**, or **RDS databases** in the navigation pane.
- 3. On the recommendation page of the resource that you selected, choose **Graviton (aws-arm64)** in the **CPU architecture preference** dropdown.
- 4. (Optional) Otherwise, choose **Current** to view recommendations that are based on the same CPU vendor and architecture as the current instance.

Note

The Current price, Recommended price, Price difference, Price difference (%), and Estimated monthly savings columns are updated to provide a price comparison between the current instance type and the instance type of the selected CPU architecture preference. For example, if you choose Graviton (aws-arm64), prices are compared between the current instance type and the recommended Graviton-based instance type.

Additional resources

- Viewing EC2 instance recommendations
- Viewing EC2 Auto Scaling group recommendations
- Viewing Aurora and RDS database recommendations

Managing accounts and preferences

The Accounts page of the Compute Optimizer console lists the recommendation preferences that are activated for the account or organization, such as enhanced infrastructure metrics.

For the management account of an organization, the Accounts page also lists your organization's member accounts and their opt-in status to Compute Optimizer. Management accounts can opt in member accounts of the organization to AWS Compute Optimizer. When a member account is opted in, Compute Optimizer analyzes the member account's supported resources for potential optimization.

Topics

- Viewing the status of an organization's member accounts
- Delegating an administrator account

Viewing the status of an organization's member accounts

This section provides you with instructions on how to view member accounts of an organization that are opted in to Compute Optimizer.



Note


This option is only available to the account manager or delegated administrator of an organization who opted in member accounts to Compute Optimizer.

Prerequisites

The following procedure assumes that you have already completed the Opting in to AWS Compute Optimizer procedure.

- Open the Compute Optimizer console at https://console.aws.amazon.com/computeoptimizer/.
- Choose **Account management** in the navigation pane.

The **Account management** page lists the member accounts of the organization and their current Compute Optimizer opt-in status. The **Opt-in status** and **Status description** columns describe the status of each account ID that are listed. To delegate an administrator account, see the section called "Delegating an administrator account".

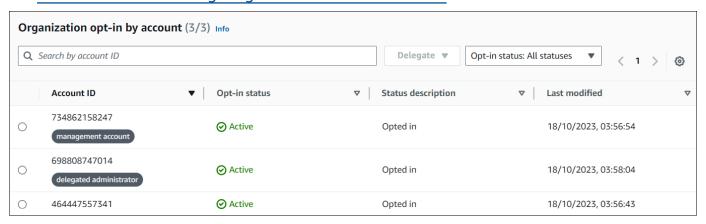

Additional resources

- · Delegating an administrator account
- Opting in to AWS Compute Optimizer

Delegating an administrator account

You can delegate a member account in your organization as an administrator for Compute Optimizer. A delegated administrator can access and manage Compute Optimizer recommendations. A delegated administrator can also set recommendation preferences for your entire organization without the need to access the management account. The management account controls the delegated administrator option for its organization. Each organization can only have one delegated administrator for Compute Optimizer at a time.

The delegated administrator can get and export recommendations, set recommendation preferences, set member account opt-in status, and get projected utilization metrics.

Additional resources 182

Note

 You can limit your delegated administrator's access to Compute Optimizer actions by setting up appropriate IAM permissions in your IAM policy. For more information, see Policies and permissions in IAM.

 If you're the delegated administrator and you want to view org-level recommendations, see <u>Policies to grant access to Compute Optimizer for a management account of an</u> <u>organization</u>.

Procedure

Use the following procedures to register, update, or deregister an account as a delegated administrator. You can do this using the Compute Optimizer console or the AWS CLI.

Registering or updating a delegated administrator

Console

To register or update an account as a delegated administrator

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose **Account management** in the navigation pane.
- 3. In the **Organization opt-in by account** section, choose the account ID that you want to add as the delegated administrator.
- 4. For **Delegate**, choose **Register as delegated administrator**.
- 5. In the prompt that appears, choose **Confirm** if you agree to the change and to add the delegated administrator.

CLI

To register or update an account as a delegated administrator

- 1. Log in as the management account of your organization.
- 2. Open a terminal or command prompt window.

3. Call the following API operation. Replace 123456789012 with your account ID.

```
aws organizations register-delegated-administrator \
--account-id 123456789012 \
--service-principal compute-
optimizer.amazonaws.com
```

Deregistering a delegated administrator

Console

To deregister a member account as a delegated administrator

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose **Account management** in the navigation pane.
- 3. In the **Organization opt-in by account** section, choose the current delegated administrator's account ID.
- 4. For **Delegate**, choose **Deregister as delegated administrator**.
- 5. In the prompt that appears, choose **Confirm** if you agree to the change and to remove the delegated administrator.

CLI

To deregister a member account as a delegated administrator

- 1. Log in as the management account of your organization.
- 2. Open a terminal or command prompt window.
- 3. Call the following API operation. Replace 123456789012 with your account ID.

```
aws organizations deregister-delegated-administrator \
--account-id 123456789012 \
--service-principal compute-
optimizer.amazonaws.com
```

Additional resources

• Viewing the status of an organization's member accounts

Additional resources 185

Exporting AWS Compute Optimizer recommendations

You can export your recommendations to record them over time, and share the data with others. Recommendations are exported in a CSV file, and its metadata in a JSON file, to an existing Amazon Simple Storage Service (Amazon S3) bucket that you specify.

Topics

- Specifying an existing S3 bucket for your recommendations export
- Exporting your recommendations
- · Viewing your export jobs
- Exported files

Specifying an existing S3 bucket for your recommendations export

You can export your Compute Optimizer recommendations to an Amazon Simple Storage Service (Amazon S3) bucket. Your recommendations are exported as CSV file and the metadata is exported as a JSON file. This section provides you with instructions on how to specify an Amazon S3 bucket for your recommendation export by adding a policy to the bucket. The policy that you add allows Compute Optimizer to write recommendations export files to your Amazon S3 bucket.

Prerequisites

Make sure that you create a destination S3 bucket for your recommendations export. The S3 bucket that you specify for your recommendations export files must not be publicly accessible, and can't be configured as a <u>Requester Pays</u> bucket. As a security best practice, create a dedicated S3 bucket for Compute Optimizer export files. For more information, see <u>How Do I Create an S3 Bucket?</u> in the *Amazon S3 Console User Guide*.

Procedure

After you create your S3 bucket, follow these steps to add a policy to the S3 bucket that allows Compute Optimizer to write recommendations export files to your bucket.

- 1. Open the Amazon S3 console at https://console.aws.amazon.com/s3/.
- 2. Choose the bucket where you want Compute Optimizer to deliver your export files.

- Choose Permissions. 3.
- Choose **Bucket Policy**. 4.
- 5. Copy one of the following policies, and paste it into the **Bucket Policy Editor** text box.
- Replace the following placeholder text in the policy: 6.
 - Replace amzn-s3-demo-bucket with the name of your bucket.
 - Replace optional Prefix with the optional object prefix.
 - Replace *myRegion* with the source AWS Region.
 - Replace myAccount ID with the account number of the requester of the export job.
- Include all three of the following statements in the policy: 7.
 - 1. The first statement (for the GetBucketAcl action) allows Compute Optimizer to get the access control list (ACL) of your bucket.
 - 2. The second statement (for the GetBucketPolicyStatus action) allows Compute Optimizer to get the policy status of your bucket, indicating whether the bucket is public.
 - 3. The third statement (for the PutObject action) gives Compute Optimizer full control to put the export file in your bucket.

Your export request fails if any of these statements are missing or if the bucket name and optional object prefix in the policy don't match what you specify in your export request. Your export also fails if the account number in the policy doesn't match the account number of the requester of the export job.



Note

If the existing bucket already has one or more policies attached, add the statements for Compute Optimizer access to that policy or policies. Evaluate the resulting set of permissions to ensure that they're appropriate for the users who access the bucket.

Policy option 1: Using an optional prefix

The object prefix is an optional addition to the S3 object key that organizes your export files in your S3 bucket. If you want to specify an object prefix when you create your recommendations export, use the following policy.

```
{
            "Version": "2012-10-17",
            "Statement": [
                {
                    "Effect": "Allow",
                    "Principal": {"Service": "compute-optimizer.amazonaws.com"},
                    "Action": "s3:GetBucketAcl",
                    "Resource": "arn:aws:s3:::amzn-s3-demo-bucket"
                },
                {
                    "Effect": "Allow",
                    "Principal": {"Service": "compute-optimizer.amazonaws.com"},
                    "Action": "s3:GetBucketPolicyStatus",
                    "Resource": "arn:aws:s3:::amzn-s3-demo-bucket"
                },
                    "Effect": "Allow",
                    "Principal": {"Service": "compute-optimizer.amazonaws.com"},
                    "Action": "s3:PutObject",
                    "Resource": "arn:aws:s3:::amzn-s3-demo-bucket/optionalPrefix/
compute-optimizer/myAccountID/*",
                    "Condition": {"StringEquals": {
                            "s3:x-amz-acl": "bucket-owner-full-control",
                            "aws:SourceAccount": "myAccountID"
                        },
                        "StringLike": {
                               "aws:SourceArn": "arn:aws:compute-
optimizer:myRegion:myAccountID:*"
                         }
                    }
                 }
            ]
        }
```

Note

The *compute-optimizer/myAccountID/* component isn't part of the optional prefix. Compute Optimizer creates the *optimizer/myAccountID/* part of the bucket path for you that's added to the prefix that you specify.

Policy option 2: No object prefix

If you don't want to specify an object prefix, use the following policy.

```
{
            "Version": "2012-10-17",
            "Statement": [
                {
                    "Effect": "Allow",
                    "Principal": {"Service": "compute-optimizer.amazonaws.com"},
                    "Action": "s3:GetBucketAcl",
                    "Resource": "arn:aws:s3:::amzn-s3-demo-bucket"
                },
                {
                    "Effect": "Allow",
                    "Principal": {"Service": "compute-optimizer.amazonaws.com"},
                    "Action": "s3:GetBucketPolicyStatus",
                    "Resource": "arn:aws:s3:::amzn-s3-demo-bucket"
                },
                {
                    "Effect": "Allow",
                    "Principal": {"Service": "compute-optimizer.amazonaws.com"},
                    "Action": "s3:PutObject",
                    "Resource": "arn:aws:s3:::amzn-s3-demo-bucket/compute-
optimizer/myAccountID/*",
                    "Condition": {"StringEquals": {
                             "s3:x-amz-acl": "bucket-owner-full-control",
                             "aws:SourceAccount": "myAccountID"
                        },
                        "StringLike": {
                             "aws:SourceArn": "arn:aws:compute-
optimizer:myRegion:myAccountID:*"
                     }
                 }
            ]
        }
```

Next steps

For instructions on how to export your AWS Compute Optimizer recommendations, see Exporting your recommendations.

Next steps 189

Additionally, you can specify S3 buckets that are encrypted with either Amazon S3 customer managed keys or AWS Key Management Service (KMS) keys. For instructions on how to do this, see Using encrypted S3 buckets for your recommendations export.

Additional resources

- Troubleshooting <u>Troubleshooting failed export jobs</u>
- Exported files
- Amazon Simple Storage Service User Guide.

Using encrypted S3 buckets for your recommendations export

For the destination of your Compute Optimizer recommendations exports, you can specify S3 buckets that are encrypted with either Amazon S3 customer managed keys or AWS Key Management Service (KMS) keys.

Prerequisites

To use an S3 bucket with AWS KMS encryption enabled, you must create a symmetric KMS key. Symmetric KMS keys are the only KMS keys that Amazon S3 supports. For instructions, see Creating keys in the AWS KMS Developer Guide.

After you create the KMS key, apply it to the S3 bucket that you plan to use for your recommendations export. For more information, see <u>Enabling Amazon S3 default bucket</u> encryption in the *Amazon Simple Storage Service User Guide*.

Procedure

Use the following procedure to grant Compute Optimizer the required permission to use your KMS key. This permission is specific for encrypting your recommendations export file when saving it to your encrypted S3 bucket.

- 1. Open the AWS KMS console at https://console.aws.amazon.com/kms.
- 2. To change the AWS Region, use the Region selector in the upper-right corner of the page.
- 3. In the left navigation menu, choose **Customer-managed keys**.

Additional resources 190



Note

Compute Optimizer recommendation exports aren't permitted for S3 buckets encrypted with AWS managed keys.

- Choose the name of the KMS key that you used to encrypt the export S3 bucket. 4.
- 5. Choose the **Key policy** tab, then choose **Switch to policy view**.
- Choose **Edit** to edit the key policy. 6.
- Copy one of the following policies, and paste it into the statements section of the key policy. 7.
- 8. Replace the following placeholder text in the policy:
 - Replace *myRegion* with the source AWS Region.
 - Replace *myAccount ID* with the account number of the export requester.

The GenerateDataKey statement allows Compute Optimizer to call the AWS KMS API to obtain the data key for encrypting the recommendation files. This way, the uploaded data format can accommodate the bucket encryption setting. Otherwise, Amazon S3 rejects the export request.



Note

If the existing KMS key already has one or more policies attached, add the statements for Compute Optimizer access to those policies. Evaluate the resulting set of permissions to ensure that they're appropriate for the users who access the KMS key.

Use the following policy to allow Amazon S3 bucket keys. This policy must be used regardless of whether S3 bucket keys are enabled or disabled. For more information, see Reducing the cost of SSE-KMS with Amazon S3 Bucket Keys in the Amazon Simple Storage Service User Guide.

```
{
                "Sid": "Allow use of the key to Compute Optimizer",
                "Effect": "Allow",
                "Principal": {
                    "Service": "compute-optimizer.amazonaws.com"
                },
```

Next steps

For instructions on how to export your AWS Compute Optimizer recommendations, see Exporting your recommendations.

Additional resources

- Troubleshooting Troubleshooting failed export jobs
- Exported files
- Amazon Simple Storage Service User Guide.

Exporting your recommendations

This section provides you with instructions on how to export your AWS Compute Optimizer recommendations. Recommendations are exported in a CSV file, and its metadata in a JSON file.

Prerequisites

- The following procedures assumes that you have already completed the <u>Specifying an existing</u>
 <u>S3 bucket for your recommendations export procedure.</u>
- Make sure that you understand the following restrictions that apply to exporting Compute Optimizer recommendations.

• You can't export recommendations from multiple AWS Regions into a single Amazon S3 bucket. To export recommendations from multiple AWS Regions, you must create separate Amazon S3 buckets for your recommendations in each AWS Region.

- You can have only one recommendations export job in progress for each resource type, and
 for each AWS Region. Before creating a new export job, confirm that all previous export jobs
 are complete. For more information about viewing your export jobs, including those that are in
 progress, see Viewing your export jobs.
- Recommendations for each resource type and in each are exported in separate CSV files. You can't export recommendations from multiple resource types and Regions into a single file.
- Large export jobs can take up to a few hours to complete. To lower your wait time, consider limiting the recommendation columns that you include in your export job. Additionally, if your account is the management account of an organization, consider limiting the number of member accounts to include in your export job.

Procedure

To export your recommendations

- 1. Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.
- 2. Choose a resource type in the navigation pane. For example, choose **EC2 instances**, **Auto Scaling groups**, **EBS volume**, **Lambda function**, or **ECS services on Fargate**.
- On the Recommendations page, choose the Action dropdown menu, and choose Export Recommendations.
- 4. On the **Export Recommendations** page, under **Export destination settings**, specify the following:
 - a. For **Region**, specify an AWS Region for your export.
 - b. For **Destination S3 bucket name**, specify the name of an existing S3 bucket in the specific Region.
 - c. (Optional) Choose Add Region to export the recommendations for another AWS Region.
 - d. (Optional) Choose **Remove** next to a specific Region and S3 bucket name to remove the destination from the export job.
 - e. (Optional) For **Object prefix**, specify a prefix to use in the destination S3 bucket for all of the export files. The prefix is an optional addition to the S3 object key that organizes

your export files in your S3 bucket. You can specify a date prefix (for example, 2020/ april), a resource type prefix (for example, ec2-instances), or a combination of both (for example, 2020/april/ec2-instances).

- Under **Export filters**, specify the following: 5.
 - For **Resource type**, choose the resource type to include in your recommendations export.
 - b. For **Accounts**, choose if you want to include recommendations for all member accounts of the organization. This option is available only if your account is the management account of an organization.
 - For **CPU architecture preference**, choose **Graviton (aws-arm64)** to export recommendations that are based on the 64-bit ARM architecture (AWS Graviton). Otherwise, choose **Current** to export recommendations that are based on the CPU architecture of your current instances.
- Under Columns to include, choose the recommendations data to include in your recommendations export. For more information about the columns to include, see Exported files.
- 7. After confirming that the export job is configured correctly, choose **Export**. Or, to return to the **Recommendations** page without creating the export job, choose **Cancel**. If you cancel the export job configuration, the configuration is deleted.



Note

If you export recommendations for multiple AWS Regions at one time, they're treated as separate export jobs. Compute Optimizer tries to start all of them at once. If an export job fails to start, the **Export Recommendations** page displays an error. Export jobs that successfully start continue to process. But, before trying to start them again, you must resolve the errors for the failed jobs.

Your recommendations export job might take up to a few hours to complete. Check the status of your export jobs by viewing the **Exports** page. For more information, see Viewing your export jobs. Your recommendations export file and its associated metadata file are saved to the specified S3 bucket when the export job is complete. The following are examples of the full Amazon S3 object key for the export file and its associated metadata file. The account ID in the object keys is the account of the requester of the export job. For more information, see Exported files.

```
s3://amzn-s3-demo-bucket/OptionalPrefix/compute-
optimizer/AccountId/AWSRegion-CreatedTimestamp-UniqueJobID.csv
```

```
s3://amzn-s3-demo-bucket/OptionalPrefix/compute-
optimizer/AccountId/AWSRegion-CreatedTimestamp-UniqueJobID-metadata.json
```

Example:

```
s3://compute-optimizer-exports/ec2-instance-recommendations/compute-optimizer/111122223333/us-west-2-2020-03-03T133027-3e496c549301c8a4dfcsdX.csv
```

```
s3://compute-optimizer-exports/ec2-instance-recommendations/compute-optimizer/111122223333/us-west-2-2020-03-03T133027-3e496c549301c8a4dfcsdX-metadata.json
```

Next steps

For instructions on how to view the export jobs that you created, see <u>Viewing your export jobs</u>.

Additional resources

- Troubleshooting Troubleshooting failed export jobs
- Exported files
- Amazon Simple Storage Service User Guide.

Viewing your export jobs

This section provides you with instructions on how to view the export jobs that you created in the last seven days.

Prerequisites

The following procedures assumes that you have already completed the <u>Exporting your recommendations</u> procedure.

Next steps 195

Procedure

To view your export jobs

Open the Compute Optimizer console at https://console.aws.amazon.com/compute-optimizer/.

2. Choose **Exports** in the navigation pane.

The **Exports** page displays the recommendation export jobs that were created in the last seven days.

Export jobs can have one of the following statuses.

- **Queued** The export job didn't start yet. You can have only one recommendations export job in progress for each resource type, and for each AWS Region.
- In progress The export job started but isn't complete. Export jobs can take anywhere from a few minutes to a few hours to complete. This depends on the number of recommendations and fields that the export job includes.
- Complete The export job is complete. A link to the export CSV file in the destination
 Amazon S3 bucket is displayed for each complete export job under the export destination column.
- **Failed** The export job failed to start or complete. The message that's displayed under the failure reason column for the export job provides additional information about why the export job failed. For example, the export might have failed because the destination Amazon S3 bucket didn't have the required permissions. After resolving the issue, try to export your recommendations again. For more information, see Troubleshooting failed export jobs.
- 3. You can perform the following actions on the page:
 - Choose the export destination link for a completed job to access the destination S3 bucket. The export destination displays only for successful export jobs. A dash (-) displays for export jobs that are in progress or that failed.
 - Scroll right to view the failure reason for failed export jobs. Use the failure reason to determine why your export job isn't complete.

Additional resources

• Troubleshooting — <u>Troubleshooting failed export jobs</u>

Exported files

Exported files

Recommendations are exported in a CSV file, and the metadata in a JSON file, to the Amazon S3 bucket that you specified when you created the export job.

Topics

- · Recommendations file
- Metadata file

Recommendations file

The recommendations file includes the recommendation data for the recommendation columns that you choose to include when you create the export job. The following tables list all of the recommendation columns that can be included in the export file for each resource type.

In the following tables, *API field name* column represents the fields that you can specify when requesting a recommendations export using the API. The *Description* column describes the data of each field, the name of the column as displayed in the Compute Optimizer console, and the name of the column as listed in the export CSV file. The recommendation data columns in the CSV file are numbered when multiple recommendations are generated for each resource. Ranked recommendation columns, in which *<rank>* is replaced with a ranking, correspond to each other. For example, recommendationOptions_1_memory, recommendationOptions_1_network, and recommendationOptions_1_vcpus correspond to each other, and are for the same recommendation.



By default, all export files include the following columns:

- recommendations_count The number of recommendations included in the export file.
- errorCode The error code for when a recommendation wasn't generated for a resource.
- errorMessage The error message that corresponds to the error in the errorCode column.

Exported files 197

EC2 instance recommendation fields

API field name	Description
AccountId	The account ID that the current instance was created under.
	This field is displayed as the Account ID column in the EC2 instances recommendations and instance details pages of the Compute Optimizer console. This field is labeled Account ID on the Export recommendations page of the Compute Optimizer console, and as accountId in the export CSV file.
CurrentInstanceType	The instance type of the current instance. This field is displayed as the Current instance type column in the EC2 instances recommend ations and instance details pages of the Compute Optimizer console. This field is labeled Current instance type on the Export recommendations page of the Compute Optimizer console, and as currentInstanceType in the export CSV file.
CurrentMemory	The memory of the current instance. This field is displayed as the Memory column in the EC2 instance details page of the Compute Optimizer console. This field is labeled Current memory on the Export recommendations page of the Compute
	Optimizer console, and as current_memory in the export CSV file.
CurrentNetwork	The network performance, or rate of data transfer, of the current instance.

API field name	Description
	This field is displayed as the Network column in the EC2 instance details page of the Compute Optimizer console. This field is labeled Current network on the Export recommendations page of the Compute Optimizer console, and as current_network in the export CSV file.
CurrentOnDemandPrice	The On-Demand price of the current instance. The price listed might not reflect the actual price you pay for the instance.
	This field is displayed as the Current On- Demand price column in the EC2 instances recommendations page of the Compute Optimizer console. This field is labeled Current On-Demand price on the Export recommendations page of the Compute Optimizer console, and as current_o nDemandPrice in the export CSV file.
CurrentStandardOneYearNoUpfrontReser vedPrice	The Reserved Instances, standard 1-year no upfront price of the current instance. The price listed might not reflect the actual price you pay for the instance.
	This field is displayed as the Current 1-year RI price column in the EC2 instances recommend ations page of the Compute Optimizer console. This field is labeled Current 1-year RI price on the Export recommendations page of the Compute Optimizer console, and as current_standardOneYearNoUpfrontRese rvedPrice in the export CSV file.

API field name	Description
CurrentStandardThreeYearNoUpfrontRes ervedPrice	The Reserved Instances, standard 3-year no upfront price of the current instance. The price listed might not reflect the actual price you pay for the instance.
	This field is displayed as the Current 3-year RI price column in the EC2 instances recommend ations page of the Compute Optimizer console. This field is labeled Current 3-year RI price on the Export recommendations page of the Compute Optimizer console, and as current_standardThreeYearNoUpfrontRe servedPrice in the export CSV file.
CurrentStorage	The local storage volume of the current instance. This field is displayed as the Storage column in the EC2 instance details page of the Compute Optimizer console. This field is labeled Current storage on the Export recommendations page of the Compute Optimizer console, and as current_storage in the export CSV file.
CurrentVCpus	The number of vCPUs of the current instance. This field is displayed as the vCPUs column in the EC2 instance details page of the Compute Optimizer console. This field is labeled Current vCPUs on the Export recommend ations page of the Compute Optimizer console, and as current_vcpus in the export CSV file.

API field name	Description
Finding	The finding classification for the current instance. Instances can be classified as underprovisioned, over-provisioned, or optimized . For more information, see Instance finding classifications .
	This field is displayed as the Finding column in the EC2 instances recommendations page of the Compute Optimizer console. This field is labeled Finding on the Export recommend ations page of the Compute Optimizer console, and as finding in the export CSV file.
FindingReasonCodes	The finding reasons describe which specifica tions of the current instance were under-pro visioned or over-provisioned. Specifications include CPU, memory, local disk throughput, local disk IOPS, EBS volume throughput, EBS volume IOPS, network bandwidth, or network packets-per-second.
	This field is displayed as the Finding reasons column in the EC2 instances recommendations page of the Compute Optimizer console. This field is labeled Finding reason codes on the Export recommendations page of the Compute Optimizer console, and as findingRe asonCodes_<code></code> in the export CSV file. The <code></code> portion of the label identifies the instance specifications (CPU, memory, network, etc.) that are over-provisioned or under-provisioned.

API field name	Description
InstanceArn	The Amazon Resource Name (ARN) of the current instance. This field is not displayed in the Compute Optimizer console. This field is labeled Instance ARN on the Export recommendations page of the Compute Optimizer console, and as instanceArn in the export CSV file.
InstanceState	The state of the instance when the recommendation was generated.
	This field is displayed as the Recommendation instance state column in the EC2 instance recommendation and detail pages of the Compute Optimizer console. This field is labeled Recommendation instance state on the Export recommendations page of the Compute Optimizer console, and labeled instanceArn in the export CSV file.
InstanceName	The name of the current instance.
	This field is displayed as the Instance name column in the EC2 instances recommendations page of the Compute Optimizer console. This field is labeled Instance name on the Export recommendations page of the Compute Optimizer console, and as instanceName in the export CSV file.

API field name	Description
LastRefreshTimestamp	The timestamp of when the instance recommendation was last refreshed.
	This field isn't displayed in the Compute Optimizer console. This field is labeled Last refresh timestamp on the Export recommend ations page of the Compute Optimizer console, and as lastRefreshTimestamp_UTC in the export CSV file.
LookbackPeriodInDays	The number of preceding days for which Compute Optimizer analyzed metric data from the current instance to generate the recommendation.
	This field isn't displayed in the Compute Optimizer console. This field is labeled Lookback period in days on the Export recommendations page of the Compute Optimizer console, and as lookBackP eriodInDays in the export CSV file.
RecommendationOptionsInstanceType	The instance type of the instance recommend ation.
	This field is displayed as the Recommended instance type column in the EC2 instances recommendations page of the Compute Optimizer console. This field is labeled Recommendation options Instance type on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_instance Type in the export CSV file.</rank>

API field name	Description
RecommendationOptionsMemory	The memory of the instance recommendation.
	This field is displayed as the Memory column in the EC2 instance details page of the Compute Optimizer console. This field is labeled Recommendation options memory on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_memory in the export CSV file.</rank>
RecommendationOptionsNetwork	The network performance or rate of data transfer of the instance recommendation.
	This field is displayed as the Network column in the EC2 instance details page of the Compute Optimizer console. This field is labeled Recommendation options network on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_<rank>_network</rank> in the export CSV file.
RecommendationOptionsOnDemandPrice	The On-Demand price of the instance recommendation.
	This field is displayed as the Recommend ed On-Demand price column in the EC2 instance recommendations page of the Compute Optimizer console. This field is labeled Recommendation options On-Demand price on the Export recommend ations page of the Compute Optimizer console, and as recommendationOpti ons_ <rank>_onDemandPrice in the export CSV file.</rank>

API field name	Description
RecommendationOptionsPerformanceRisk	The performance risk of the instance recommendation.
	This field is displayed as the Performance risk column in the EC2 instance details page of the Compute Optimizer console. This field is labeled Recommendation options performan ce risk on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_performanceRisk in the export CSV file.</rank>
RecommendationOptionsPlatformDifferences	The platform differences column displays the configuration differences between the current instance and each recommended instance type option. The recommended instance type might use a different CPU architecture, hypervisor, instance store, network interface, storage interface, and virtualization type. This field is displayed as the Platform differences column in the EC2 instance details page of the Compute Optimizer console. This field is labeled Recommendation options platform differences on the Export recommendations page of the Compute Optimizer console, and as recommend ationOptions_ <rank>_platformDifferences_<difference> in the export CSV file. The <difference> portion of the label identifies the configuration that's different between the current instance and recommend ed instance type.</difference></difference></rank>

API field name	Description
RecommendationOptionsProjectedUtiliz ationMetricsCpuMaximum	The projected maximum CPU utilization metric of the instance recommendation. This value defines the maximum CPU utilization of the recommended instance type if you used the recommended instance type during the lookback period. This field is displayed as an overlay on the CPU utilization (percent) metric graph in the EC2 instance details page of the Compute Optimizer console. This field is labeled Recommendation options projected utilizati on metrics CPU maximum on the Export recommendations page of the Compute Optimizer console, and as recommend ationOptions_ <rank>_projectedUtilizat ionMetrics_CPU_MAXIMUM in the export CSV file.</rank>

API field name	Description
RecommendationOptionsProjectedUtiliz ationMetricsMemoryMaximum	The projected maximum memory utilization metric of the instance recommendation. This value defines the maximum memory utilizati on of the recommended instance type if you used the recommended instance type during the look-back period.
	This field is displayed as an overlay on the Memory utilization (percent) metric graph in the EC2 instance details page of the Compute Optimizer console. This field is labeled Recommendation options projected utilization metrics memory maximum on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_projected dUtilizationMetrics_MEMORY_MAXIMUM in the export CSV file.</rank>
RecommendationOptionsStandardOneYear NoUpfrontReservedPrice	The Reserved Instances, standard 1-year no upfront price for the instance recommend ation.
	This field is displayed as the Recommended 1-year RI price column in the EC2 instance recommendations page of the Compute Optimizer console. This field is labeled Recommended options 1-year RI price on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_standard OneYearNoUpfrontReservedPrice in the export CSV file.</rank>

API field name	Description
RecommendationOptionsStandardThreeYe arNoUpfrontReservedPrice	The Reserved Instances, standard 3-year no upfront price for the instance recommend ation.
	This field is displayed as the Recommended 3-year RI price column in the EC2 instance recommendations page of the Compute Optimizer console. This field is labeled Recommended options 3-year RI price on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_standard ThreeYearNoUpfrontReservedPrice in the export CSV file.</rank>
RecommendationOptionsStorage	The local storage volume of the instance recommendation. This field is displayed as the Storage column in the EC2 instance details page of the Compute Optimizer console. This field is labeled Recommendation options storage on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_storage in the export CSV file.</rank>

API field name	Description
RecommendationOptionsVcpus	The vCPUs of the instance recommendation. This field is displayed as the vCPUs column in the EC2 instance details page of the Compute Optimizer console. This field is labeled Recommendation options vCPUs on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_vcpus in the export CSV file.</rank>
RecommendationsSourcesRecommendation SourceArn	The Amazon Resource Name (ARN) of the current resource. This field is not displayed in the Compute Optimizer console. This field is labeled Recommendation source ARN on the Export recommendations page of the Compute Optimizer console, and as recommend ationsSources_ <rank>_recommendationSourceArn in the export CSV file.</rank>
Recommendations Sources Recommendation Source Type	The resource type of the current resource (for example, instance). This field is not displayed in the Compute Optimizer console. This field is labeled Recommendation source type on the Export recommendations page of the Compute Optimizer console, and as recommend ationsSources_ <rank>_recommendationSourceType in the export CSV file.</rank>

API field name	Description
UtilizationMetricsCpuMaximum	The maximum CPU utilization metric of the current instance observed during the lookback period (up to 14 days).
	This field is displayed as the CPU utilization (percent) graph in the EC2 instance details page. This field is labeled Utilization metrics CPU maximum on the Export recommend ations page of the Compute Optimizer console, and as utilizationMetrics_CPU_MAXI MUM in the export CSV file.
UtilizationMetricsDiskReadBytesPerSe condMaximum	The maximum disk read bytes per second of the current instance observed during the lookback period (up to 14 days).
	This field is displayed as the Disk read (MiB/second) graph in the EC2 instance details page. This field is labeled Utilization metrics disk read bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizati onMetrics_DISK_READ_BYTES_PER_SECOND_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsDiskReadOpsPerSeco ndMaximum	The maximum disk read operations per second of the current instance observed during the lookback period (up to 14 days).
	This field is displayed as the Disk read (operations/second) graph in the EC2 instance details page. This field is labeled Utilization metrics disk read operations per second maximum on the Export recommend ations page of the Compute Optimizer console, and as utilizationMetrics_DISK_READ_OPS_PER_SECOND_MAXIMUM in the export CSV file.
UtilizationMetricsDiskWriteBytesPerS econdMaximum	The maximum disk write bytes per second of the current instance observed during the lookback period (up to 14 days). This field is displayed as the Disk write (MiB/second) graph in the EC2 instance details page. This field is labeled Utilization metrics disk write bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizati onMetrics_DISK_WRITE_BYTES_PER_SECON D_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsDiskWriteOpsPerSec ondMaximum	The maximum disk write operations per second of the current instance observed during the lookback period (up to 14 days).
	This field is displayed as the Disk write (operations/second) graph in the EC2 instance details page. This field is labeled Utilization metrics disk write operations per second maximum on the Export recommend ations page of the Compute Optimizer console, and as utilizationMetrics_DISK_WRITE_OPS_PER_SECOND_MAXIMUM in the export CSV file.
UtilizationMetricsEbsReadBytesPerSec ondMaximum	The maximum bytes read per second for volumes attached to an instance observed during the lookback period (up to 14 days). This field is displayed as the EBS read bandwidth (MiB/second) graph in the EC2 instance details page. This field is labeled Utilization metrics EBS read bandwidth bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics _EBS_READ_BYTES_PER_SECOND_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsEbsReadOpsPerSecon dMaximum	The maximum number of read operations per second for volumes attached to an instance observed during the lookback period (up to 14 days).
	This field is displayed as the EBS read operations (per second) graph in the EC2 instance details page. This field is labeled Utilization metrics EBS read throughpu t operations per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics_EBS_READ_OPS_PER_SECOND_MAXIMUM in the export CSV file.
UtilizationMetricsEbsWriteBytesPerSe condMaximum	The maximum bytes written per second for volumes attached to an instance observed during the lookback period (up to 14 days). This field is displayed as the EBS write bandwidth (MiB/second) graph in the EC2 instance details page. This field is labeled Utilization metrics EBS write bandwidth bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizati onMetrics_EBS_WRITE_BYTES_PER_SECOND _MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsEbsWriteOpsPerSeco ndMaximum	The maximum number of write operations per second for volumes attached to an instance observed during the lookback period (up to 14 days).
	This field is displayed as the EBS write operations (per second) graph in the EC2 instance details page. This field is labeled Utilization metrics EBS write throughpu t operations per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizati onMetrics_EBS_WRITE_OPS_PER_SECOND_M AXIMUM in the export CSV file.
UtilizationMetricsMemoryMaximum	The maximum memory utilization metric of the current instance observed during the lookback period (up to 14 days). This field is displayed as the Memory utilizati on (percent) graph in the EC2 instance details page. This field is labeled Utilization metrics memory maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetricsMEMORY_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsNetworkInBytesPerS econdMaximum	The maximum network in bytes per second of the current instance observed during the lookback period (up to 14 days).
	This field is displayed as the Network in (MiB/second) graph in the EC2 instance details page. This field is labeled Utilizati on metrics network in bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics_NETWORK_IN_BYTES_PER_SECOND_MAXIMUM in the export CSV file.
UtilizationMetricsNetworkOutBytesPer SecondMaximum	The maximum network out bytes per second of the current instance observed during the lookback period (up to 14 days). This field is displayed as the Network out (MiB/second) graph in the EC2 instance details page. This field is labeled Utilizati on metrics network out bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics_NETWORK_OUT_BYTES _PER_SECOND_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsNetworkPacketsInPe rSecondMaximum	The maximum network packets in per second of the current instance observed during the lookback period (up to 14 days).
	This field is displayed as the Network packets in (per second) graph in the EC2 instance details page. This field is labeled Utilizati on metrics network packets in per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics_NETWORK_PACKETS_I N_PER_SECOND_MAXIMUM in the export CSV file.
UtilizationMetricsNetworkPacketsOutP erSecondMaximum	The maximum network packets out per second of the current instance observed during the lookback period (up to 14 days).
	This field is displayed as the Network packets out (per second) graph in the EC2 instance details page. This field is labeled Utilizati on metrics network packets out per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics_NETWORK_PACKETS_O UT_PER_SECOND_MAXIMUM in the export CSV file.

API field name	Description
EffectiveRecommendationPreferencesEn hancedInfrastructureMetrics	The status of the enhanced infrastructure metrics recommendation preference for the listed recommendation. An Active status confirms the recommendation listed is considering the longer three-month lookback period. An Inactive status confirms that the recommendation is not yet considering the longer lookback period. For more information, see Enhanced infrastructure metrics. This field is displayed as the Effective enhanced infrastructure metrics column in the EC2 instance recommendations page of the Compute Optimizer console. On the Export recommendations page of the Compute Optimizer console, it's labeled as Effective recommendation preferences enhanced infrastructure metrics, and in the export CSV file, it's labeled as Effective RecommendationPreferencesEnhancedInfrastructureMetrics.
EffectiveRecommendationPreferencesEx ternalMetricsSource	The status of the external metrics recommend ation preference for the listed recommend ation. For more information, see External metrics ingestion . On the Export recommendations page of the Compute Optimizer console, this field is labeled as Effective recommendation preferences external metrics source , and in the export CSV file format it's labeled as EffectiveRecommendationPreferencesExternalMetricsSource .

API field name	Description
EffectiveRecommendationPreferencesCp uVendorArchitectures	The CPU vendor and architecture for an EC2 instance recommendation.
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Effective recommendation preferences CPU vendor architectures, and in the export CSV file, it's labeled as Effective RecommendationPreferencesCpuVendorAr chitectures.
CurrentPerformanceRisk	The performance risk rating for a current instance.
	This field is displayed as the Current performance risk column in the EC2 instances recommendations page of the Compute Optimizer console. On the Export recommend ations page of the Compute Optimizer console, it's labeled as Current performance risk, and in the export CSV file, it's labeled as CurrentPerformanceRisk.
RecommendationOptionsSavingsOpportun ityPercentage	The estimated monthly savings possible as a percentage of monthly cost by adopting Compute Optimizer recommendations for an instance.
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options savings opportunity percentage , and in the export CSV file, it's labeled as RecommendationOptionsSavingsOpportunityPercentage .

API field name	Description
RecommendationOptionsEstimatedMonthl ySavingsCurrency	The currency of the estimated monthly savings.
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options estimated monthly savings currency , and in the export CSV file, it's labeled as Recommend ationOptionsEstimatedMonthlySavingsCurrency .
RecommendationOptionsEstimatedMonthl	The value of the estimated monthly savings.
ySavingsValue	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options estimated monthly savings value , and in the export CSV file, it's labeled as Recommend ationOptionsEstimatedMonthlySavingsV alue .
EffectiveRecommendationPreferencesIn ferredWorkloadTypes	The status of the inferred workload type recommendation preference for the listed recommendation. For more information, see Inferred workload type .
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Effective recommendation preferences inferred workload types, and in the export CSV file, it's labeled as Effective RecommendationPreferencesInferredWorkloadTypes.

API field name	Description
InferredWorkloadTypes	The application that might be running on the instance as detected by Compute Optimizer. For more information, see Inferred workload types .
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Inferred workload types , and in the export CSV file, it's labeled as InferredW orkloadTypes .
RecommendationOptionsMigrationEffort	The level of effort that might be required to migrate from the current instance type to the recommended instance type. For more information, see Inferred workload types . On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options migration effort, and in the export CSV file, it's labeled as RecommendationOpti onsMigrationEffort.

Auto Scaling group recommendation fields

API field name	Description
AccountId	The account ID in which the current Auto Scaling group was created.
	This field is displayed as the Account ID column in the Auto Scaling groups recommendations and group details pages of the Compute Optimizer console. This field is labeled Account ID on the Export

API field name	Description
	recommendations page of the Compute Optimizer console, and as accounted in the export CSV file.
AutoScalingGroupArn	The Amazon Resource Name (ARN) of the current Auto Scaling group. This field is not displayed in the Compute Optimizer console. This field is labeled Auto Scaling group ARN on the Export recommend ations page of the Compute Optimizer console, and as autoScalingGroupArn in the export CSV file.
AutoScalingGroupName	The name of the Auto Scaling group. This field is displayed as the Auto Scaling group name column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Auto Scaling group name on the Export recommendations page of the Compute Optimizer console, and as autoScalingGroupName in the export CSV file.

API field name	Description
CurrentConfigurationDesiredCapacity	The desired capacity of the current Auto Scaling group.
	This field is displayed as the Desired number of instances column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Current desired capacity on the Export recommendations page of the Compute Optimizer console, and as currentConfiguration_desiredCapacity in the export CSV file.
CurrentConfigurationInstanceType	The instance type of instances in the current Auto Scaling group.
	This field is displayed as the Current instancce type column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Current instance type on the Export recommendations page of the Compute Optimizer console, and as currentConfigurati on_instanceType in the export CSV file.
CurrentConfigurationMaxSize	The maximum size of the current Auto Scaling group.
	This field is displayed as the Current maximum size column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Current maximum size on the Export recommendations page of the Compute Optimizer console, and as currentConfigurati on_maxSize in the export CSV file.

API field name	Description
CurrentConfigurationMinSize	The minimum size of the current Auto Scaling group.
	This field is displayed as the Current minimum size column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Current minimum size on the Export recommendations page of the Compute Optimizer console, and as currentConfigurati on_minSize in the export CSV file.
CurrentMemory	The memory of instances in the current Auto Scaling group.
	This field is displayed as the Memory column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Current memory on the Export recommendations page of the Compute Optimizer console, and as current_memory in the export CSV file.
CurrentNetwork	The network performance, or rate of data transfer, of instances in the current Auto Scaling group.
	This field is displayed as the Network column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Current network on the Export recommendations page of the Compute Optimizer console, and as current_network in the export CSV file.

API field name	Description
CurrentOnDemandPrice	The On-Demand price of instances in the current Auto Scaling group. The price that's listed might not reflect the actual price that you pay for the instance. This field is displayed as the Current On-Demand price column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Current On-Demand price on the Export recommendations page of the Compute Optimizer console, and as current_o nDemandPrice in the export CSV file.
CurrentStandardOneYearNoUpfrontReser vedPrice	The Reserved Instances, standard 1-year no upfront price of instances in the current Auto Scaling group. The price listed might not reflect the actual price you pay for the instance.
	This field is displayed as the Current 1- year RI price column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Current 1-year RI price on the Export recommendations page of the Compute Optimizer console, and as current_s tandardOneYearNoUpfrontReservedPrice in the export CSV file.

API field name	Description
CurrentStandardThreeYearNoUpfrontRes ervedPrice	The Reserved Instances, standard 3-year no upfront price of instances in the current Auto Scaling group. The price listed might not reflect the actual price you pay for the instance.
	This field is displayed as the Current 3- year RI price column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Current 3-year RI price on the Export recommendations page of the Compute Optimizer console, and as current_s tandardThreeYearNoUpfrontReservedPrice in the export CSV file.
CurrentStorage	The local storage volume of instances in the current Auto Scaling group. This field is displayed as the Storage column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Current storage on the Export recommendations page of the Compute Optimizer console, and as current_storage in the export CSV file.

API field name	Description
CurrentVCpus	The number of vCPUs of instances in the current Auto Scaling group.
	This field is displayed as the vCPUs column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Current vCPUs on the Export recommendations page of the Compute Optimizer console, and as current_vcpus in the export CSV file.
Finding	The finding classification for the current Auto Scaling group. Auto Scaling groups can be classified as not optimized or optimized. For more information, see Auto Scaling group finding classifications . This field is displayed as the Finding column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Finding on the Export recommendations page of the Compute Optimizer console, and as finding in the export CSV file.
LastRefreshTimestamp	The timestamp of when the Auto Scaling group recommendation was last refreshed.
	This field is not displayed in the Compute Optimizer console. This field is labeled Last refresh timestamp on the Export recommend ations page of the Compute Optimizer console, and as lastRefreshTimestamp in the export CSV file.

API field name	Description
LookbackPeriodInDays	The number of preceding days for which Compute Optimizer analyzed metric data from the current Auto Scaling group to generate the recommendation.
	This field is not displayed in the Compute Optimizer console. This field is labeled Lookback period in days on the Export recommendations page of the Compute Optimizer console, and as lookBackPeriodInDays in the export CSV file.
RecommendationOptionsConfigurationDe siredCapacity	The desired capacity of the Auto Scaling group recommendation. This field is displayed as the Desired number of instances column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Recommend ation options desired capacity on the Export recommendations page of the Compute Optimizer console, and as recommend ationOptions_ <rank>_configuration_des iredCapacity in the export CSV file.</rank>

API field name	Description
RecommendationOptionsConfigurationIn stanceType	The instance type of the Auto Scaling group recommendation.
	This field is displayed as the Recommend ation instance type column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Recommendation options Instance type on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_configuration_instanceType in the export CSV file.</rank>
RecommendationOptionsConfigurationMa xSize	The maximum size of the Auto Scaling group recommendation. This field is displayed as the Maximum number of instances column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Recommendation options maximum size on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_configuration_maxSize in the export CSV file.</rank>

API field name	Description
RecommendationOptionsConfigurationMinSize	The minimum size of the Auto Scaling group recommendation.
	This field is displayed as the Minimum number of instances column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Recommendation options minimum size on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_configuration_minSize in the export CSV file.</rank>
RecommendationOptionsMemory	The memory of the Auto Scaling group recommendation. This field is displayed as the Memory column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Recommendation options memory on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_memory in the export CSV file.</rank>

API field name	Description
RecommendationOptionsNetwork	The network performance, or rate of data transfer, of the Auto Scaling group recommendation.
	This field is displayed as the Network column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Recommendation options network on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_<rank>_network</rank> in the export CSV file.
RecommendationOptionsOnDemandPrice	The On-Demand price of the Auto Scaling group recommendation. This field is displayed as the Recommend ed On-Demand price column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Recommendation options On-Demand price on the Export recommend ations page of the Compute Optimizer console, and as recommendationOpti ons_ <rank>_onDemandPrice in the export CSV file.</rank>

API field name	Description
RecommendationOptionsPerformanceRisk	The performance risk of the Auto Scaling group recommendation.
	This field is displayed as the Performance risk column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Recommendation options performance risk on the Export recommend ations page of the Compute Optimizer console, and as recommendationOpti ons_ <rank>_performanceRisk in the export CSV file.</rank>
RecommendationOptionsProjectedUtiliz ationMetricsCpuMaximum	The projected maximum CPU utilization metric of the Auto Scaling group recommendation. This value defines the maximum CPU utilizati on of the recommended instance type if you used the recommended instance type during the look-back period.
	This field is displayed as an overlay on the CPU utilization (percent) metric graph in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Recommendation options projected utilizati on metrics CPU maximum on the Export recommendations page of the Compute Optimizer console, and as recommend ationOptions_ <rank>_projectedUtilizat ionMetrics_CPU_MAXIMUM in the export CSV file.</rank>

API field name	Description
RecommendationOptionsProjectedUtiliz ationMetricsMemoryMaximum	The projected maximum memory utilization metric of the Auto Scaling group recommend ation. This value defines the maximum memory utilization of the recommended instance type if you used the recommended instance type during the look-back period.
	This field is displayed as an overlay on the Memory utilization (percent) metric graph in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Recommendation options projected utilization metrics memory maximum on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_projecte dUtilizationMetrics_MEMORY_MAXIMUM in the export CSV file.</rank>
RecommendationOptionsStandardOneYear NoUpfrontReservedPrice	The Reserved Instances, standard 1-year no upfront price for the Auto Scaling group recommendation. This field is displayed as the Recommend ed 1-year RI price column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Recommended options 1-year RI price on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_standard OneYearNoUpfrontReservedPrice in the export CSV file.</rank>

API field name	Description
RecommendationOptionsStandardThreeYe arNoUpfrontReservedPrice	The Reserved Instances, standard 3-year no upfront price for the Auto Scaling group recommendation.
	This field is displayed as the Recommend ed 3-year RI price column in the Auto Scaling groups recommendations page of the Compute Optimizer console. This field is labeled Recommended options 3-year RI price on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_standard ThreeYearNoUpfrontReservedPrice in the export CSV file.</rank>
RecommendationOptionsStorage	The local storage volume of the Auto Scaling group recommendation. This field is displayed as the Storage column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Recommendation options storage on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_<rank>_storage</rank> in the export CSV file.

API field name	Description
RecommendationOptionsVcpus	The vCPUs of the Auto Scaling group recommendation.
	This field is displayed as the vCPUs column in the Auto Scaling group details page of the Compute Optimizer console. This field is labeled Recommendation options vCPUs on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_ <rank>_vcpus in the export CSV file.</rank>
UtilizationMetricsCpuMaximum	The maximum CPU utilization metric of instances in the current Auto Scaling group observed during the lookback period (up to 14 days).
	This field is displayed as the CPU utilization (percent) graph in the Auto Scaling group details page. This field is labeled Utilizati on metrics CPU maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics _CPU_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsDiskReadBytesPerSe condMaximum	The maximum disk read bytes per second of the current instance observed during the lookback period (up to 14 days).
	This field is displayed as the Disk read (MiB/second) graph in the EC2 instance details page. This field is labeled Utilization metrics disk read bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizati onMetrics_DISK_READ_BYTES_PER_SECOND_MAXIMUM in the export CSV file.
UtilizationMetricsDiskReadOpsPerSeco ndMaximum	The maximum disk read operations per second of the current instance observed during the lookback period (up to 14 days).
	This field is displayed as the Disk read (operations/second) graph in the EC2 instance details page. This field is labeled Utilization metrics disk read operations per second maximum on the Export recommend ations page of the Compute Optimizer console, and as utilizationMetrics_DISK_READ_OPS_PER_SECOND_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsDiskWriteBytesPerS econdMaximum	The maximum disk write bytes per second of the current instance observed during the lookback period (up to 14 days). This field is displayed as the Disk write (MiB/second) graph in the EC2 instance details page. This field is labeled Utilization metrics disk write bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizati onMetrics_DISK_WRITE_BYTES_PER_SECON D_MAXIMUM in the export CSV file.
UtilizationMetricsDiskWriteOpsPerSec ondMaximum	The maximum disk write operations per second of the current instance observed during the lookback period (up to 14 days). This field is displayed as the Disk write (operations/second) graph in the EC2 instance details page. This field is labeled Utilization metrics disk write operations per second maximum on the Export recommend ations page of the Compute Optimizer console, and as utilizationMetrics_DISK_WRITE_OPS_PER_SECOND_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsEbsReadBytesPerSec ondMaximum	The maximum bytes read per second for volumes attached to instances in the current Auto Scaling group observed during the lookback period (up to 14 days). This field is displayed as the EBS read bandwidth (MiB/second) graph in the Auto Scaling group details page. This field is labeled Utilization metrics EBS read bandwidth bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics _EBS_READ_BYTES_PER_SECOND_MAXIMUM in the export CSV file.
UtilizationMetricsEbsReadOpsPerSecon dMaximum	The maximum number of read operations per second for volumes attached to instances in the current Auto Scaling group observed during the lookback period (up to 14 days). This field is displayed as the EBS read operations (per second) graph in the Auto Scaling group details page. This field is labeled Utilization metrics EBS read throughput operations per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics_EBS_READ_OPS_PER_SECOND_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsEbsWriteBytesPerSe condMaximum	The maximum bytes written per second for volumes attached to instances in the current Auto Scaling group observed during the lookback period (up to 14 days). This field is displayed as the EBS write bandwidth (MiB/second) graph in the Auto Scaling group details page. This field is labeled Utilization metrics EBS write bandwidth bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizati onMetrics_EBS_WRITE_BYTES_PER_SECOND_MAXIMUM in the export CSV file.
UtilizationMetricsEbsWriteOpsPerSeco ndMaximum	The maximum number of write operations per second for volumes attached to instances in the current Auto Scaling group observed during the lookback period (up to 14 days). This field is displayed as the EBS write operations (per second) graph in the Auto Scaling group details page. This field is labeled Utilization metrics EBS write throughpu t operations per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizati onMetrics_EBS_WRITE_OPS_PER_SECOND_M AXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsMemoryMaximum	The maximum memory utilization metric of instances in the current Auto Scaling group observed during the lookback period (up to 14 days).
	This field is displayed as the Memory utilizati on (percent) graph in the Auto Scaling group details page. This field is labeled Utilization metrics memory maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics _MEMORY_MAXIMUM in the export CSV file.
UtilizationMetricsNetworkInBytesPerS econdMaximum	The maximum network in bytes per second of the current instance observed during the lookback period (up to 14 days). This field is displayed as the Network in (MiB/second) graph in the EC2 instance details page. This field is labeled Utilizati on metrics network in bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics_NETWORK_IN_BYTES_PER_SECOND_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsNetworkOutBytesPer SecondMaximum	The maximum network out bytes per second of the current instance observed during the lookback period (up to 14 days).
	This field is displayed as the Network out (MiB/second) graph in the EC2 instance details page. This field is labeled Utilizati on metrics network out bytes per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics_NETWORK_OUT_BYTES _PER_SECOND_MAXIMUM in the export CSV file.
UtilizationMetricsNetworkPacketsInPe rSecondMaximum	The maximum network packets in per second of the current instance observed during the lookback period (up to 14 days). This field is displayed as the Network packets in (per second) graph in the EC2 instance details page. This field is labeled Utilizati on metrics network packets in per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics_NETWORK_PACKETS_I N_PER_SECOND_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsNetworkPacketsOutP erSecondMaximum	The maximum network packets out per second of the current instance observed during the lookback period (up to 14 days).
	This field is displayed as the Network packets out (per second) graph in the EC2 instance details page. This field is labeled Utilizati on metrics network packets out per second maximum on the Export recommendations page of the Compute Optimizer console, and as utilizationMetrics_NETWORK_PACKETS_OUT_PER_SECOND_MAXIMUM in the export CSV file.
EffectiveRecommendationPreferencesEn hancedInfrastructureMetrics	The status of the enhanced infrastructure metrics recommendation preference for the listed recommendation. An Active status confirms the recommendation listed is considering the longer three-month lookback period. An Inactive status confirms that the recommendation isn't considering the longer lookback period. For more information, see Enhanced infrastructure metrics. This field is displayed as the Effective enhanced infrastructure metrics column in the Auto Scaling group recommendations page of the Compute Optimizer console. On the Export recommendations page of the Compute Optimizer console, it's labeled as Effective recommendation preferences enhanced infrastructure metrics, and in the export CSV file, it's labeled as Effective RecommendationPreferencesEnhancedInfrastructureMetrics.

API field name	Description
EffectiveRecommendationPreferencesCp uVendorArchitectures	The CPU vendor and architecture for an Auto Scaling group recommendation.
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Effective recommendation preferences CPU vendor architectures, and in the export CSV file, it's labeled as Effective RecommendationPreferencesCpuVendorAr chitectures.
CurrentPerformanceRisk	The performance risk rating for a current Auto Scaling group.
	This field is displayed as the Current performance risk column in the Auto Scaling groups recommendations page of the Compute Optimizer console. On the Export recommendations page of the Compute Optimizer console, it's labeled as Current performance risk, and in the export CSV file, it's labeled as CurrentPerformanceRisk.
RecommendationOptionsSavingsOpportun ityPercentage	The estimated monthly savings possible as a percentage of monthly cost by adopting Compute Optimizer recommendations for an Auto Scaling group.
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options savings opportunity percentage , and in the export CSV file, it's labeled as RecommendationOptionsSavingsOpportunityPercentage .

API field name	Description
RecommendationOptionsEstimatedMonthl ySavingsCurrency	The currency of the estimated monthly savings.
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options estimated monthly savings currency , and in the export CSV file, it's labeled as Recommend ationOptionsEstimatedMonthlySavingsCurrency .
RecommendationOptionsEstimatedMonthl	The value of the estimated monthly savings.
ySavingsValue	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options estimated monthly savings value , and in the export CSV file, it's labeled as Recommend ationOptionsEstimatedMonthlySavingsV alue .
EffectiveRecommendationPreferencesIn ferredWorkloadTypes	The status of the inferred workload type recommendation preference for the listed recommendation. For more information, see Inferred workload type .
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Effective recommendation preferences inferred workload types, and in the export CSV file, it's labeled as Effective RecommendationPreferencesInferredWorkloadTypes.

API field name	Description
InferredWorkloadTypes	The application that might be running on the instances in the Auto Scaling group as detected by Compute Optimizer. For more information, see Inferred workload types . On the Export recommendations page of the Compute Optimizer console, this field is labeled as Inferred workload types , and in the export CSV file, it's labeled as InferredWorkloadTypes .
RecommendationOptionsMigrationEffort	The level of effort that might be required to migrate from the current instance type to the recommended instance type. For more information, see Inferred workload types . On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options migration effort, and in the export CSV file, it's labeled as RecommendationOpti onsMigrationEffort.

EBS volume recommendation fields

API field name	Description
AccountId	The AWS account ID that the current EBS volume was created under.
	This field is displayed as the Account ID column in the Amazon EBS volumes recommendations and volume details pages of the Compute Optimizer console. This field is labeled Account ID on the Export

API field name	Description
	recommendations page of the Compute Optimizer console, and as accountId in the export CSV file.
CurrentConfigurationVolumeBaselineIOPS	The baseline input/output operations per second (IOPS) of the current EBS volume. This field is displayed as the Current IOPS column in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Current baseline IOPS on the Export recommendations page of the Compute Optimizer console, and as CurrentConfigurati onVolumeBaselineIOPS in the export CSV file.
CurrentConfigurationVolumeBaselineTh roughput	The baseline throughput of the current EBS volume. This field is displayed as the Current throughput column in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Current baseline throughput on the Export recommendations page of the Compute Optimizer console, and as CurrentConfigurationVolumeBaselineThroughput in the export CSV file.

API field name	Description
CurrentConfigurationVolumeBurstIOPS	The burst input/output operations per second (IOPS) of the current EBS volume.
	This field is displayed as the Burst IOPS column in the Amazon EBS volume details page of the Compute Optimizer console. This field is labeled Current burst IOPS on the Export recommendations page of the Compute Optimizer console, and as CurrentConfigurationVolumeBurstIOPS in the export CSV file.
CurrentConfigurationVolumeBurstThroughput	The volume burst throughput of the current EBS volume.
	This field is displayed as the Burst throughpu t column in the Amazon EBS volume details page of the Compute Optimizer console. This field is labeled Current burst throughput on the Export recommendations page of the Compute Optimizer console, and as CurrentConfigurationVolumeBurstThroughput in the export CSV file.
CurrentConfigurationVolumeSize	The current size (in GB) of the current EBS volume.
	This field is displayed as the Current size column in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Current volume size on the Export recommendations page of the Compute Optimizer console, and as CurrentConfigurati onVolumeSize in the export CSV file.

API field name	Description
CurrentConfigurationVolumeType	The volume type of the current EBS volume.
	This field is displayed as the Current volume type column in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Current volume type on the Export recommendations page of the Compute Optimizer console, and as CurrentConfigurati onVolumeType in the export CSV file.
CurrentMonthlyPrice	The current monthly price of the current EBS volume.
	This field is displayed as the Current monthly price column in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Current monthly price on the Export recommendations page of the Compute Optimizer console, and as current Monthly Price in the export CSV file.
Finding	The finding classification for the current EBS volume. EBS volumes can be classifie d as optimized, or not optimized. For more information, see EBS volume finding classific ations.
	This field is displayed as the Finding column in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Finding on the Export recommendations page of the Compute Optimizer console, and as finding in the export CSV file.

API field name	Description
LastRefreshTimestamp	The timestamp of when the EBS volume recommendation was last refreshed.
	This field is not displayed in the Compute Optimizer console. This field is labeled Last refresh timestamp on the Export recommend ations page of the Compute Optimizer console, and as lastRefreshTimestamp in the export CSV file.
LookbackPeriodInDays	The number of preceding days for which Compute Optimizer analyzed metric data from the current EBS volume to generate the recommendation.
	This field is not displayed in the Compute Optimizer console. This field is labeled Look-back period in days on the Export recommendations page of the Compute Optimizer console, and as lookBackPeriodInDays in the export CSV file.
RecommendationOptionsConfigurationVo lumeBaselineIOPS	The baseline input/output operations per second (IOPS) of the EBS volume recommend ation.
	This field is displayed as the Recommended IOPS column in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Recommended baseline IOPS on the Export recommendations page of the Compute Optimizer console, and as Recommend ationOptions_ <rank>_ConfigurationVolumeBaselineIOPS in the export CSV file.</rank>

API field name	Description
RecommendationOptionsConfigurationVo lumeBaselineThroughput	The baseline throughput of the EBS volume recommendation.
	This field is displayed as the Recommend ed throughput column in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Recommended baseline throughpu t on the Export recommendations page of the Compute Optimizer console, and as RecommendationOptions_ <rank>_Configur ationVolumeBaselineThroughput in the export CSV file.</rank>
RecommendationOptionsConfigurationVo lumeBurstIOPS	The burst input/output operations per second (IOPS) of the EBS volume recommendation. This field is displayed as the Burst IOPS column in the Amazon EBS volume details page of the Compute Optimizer console. This field is labeled Recommended burst IOPS on the Export recommendations page of the Compute Optimizer console, and as RecommendationOptions_<rank>_ConfigurationVolumeBurstIOPS</rank> in the export CSV file.

API field name	Description
RecommendationOptionsConfigurationVo lumeBurstThroughput	The volume burst throughput of the EBS volume recommendation.
	This field is displayed as the Burst throughpu t column in the Amazon EBS volume details page of the Compute Optimizer console. This field is labeled Recommended burst throughput on the Export recommend ations page of the Compute Optimizer console, and as RecommendationOpti ons_ <rank>_ConfigurationVolumeBurstTh roughput in the export CSV file.</rank>
RecommendationOptionsConfigurationVo lumeSize	The current size (in GB) of the EBS volume recommendation. This field is displayed as the Recommend ed size column in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Recommended volume size on the Export recommendations page of the Compute Optimizer console, and as Recommend ationOptions_ <rank>_ConfigurationVolumeSize in the export CSV file.</rank>

API field name	Description
RecommendationOptionsConfigurationVo lumeType	The volume type of the EBS volume recommendation.
	This field is displayed as the Recommended volume type in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Recommended volume type on the Export recommendations page of the Compute Optimizer console, and as Recommend ationOptions_ <rank>_ConfigurationVolumeType in the export CSV file.</rank>
RecommendationOptionsMonthlyPrice	The monthly price of the EBS volume recommendation. This field is displayed as the Recommend ed monthly price column in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Recommended monthly price on the Export recommendations page of the Compute Optimizer console, and as RecommendationOptions_ <rank>_MonthlyPrice in the export CSV file.</rank>

API field name	Description
RecommendationOptionsPerformanceRisk	The performance risk of the EBS volume recommendation.
	This field is displayed as the Performan ce risk column in the Amazon EBS volume details page of the Compute Optimizer console. This field is labeled Performance risk on the Export recommendations page of the Compute Optimizer console, and as recommendationOptions_<rank>_performa</rank> nceRisk in the export CSV file.
UtilizationMetricsVolumeReadBytesPer SecondMaximum	The maximum read bytes per second metric of the current EBS volume observed during the lookback period (up to 14 days). This field is displayed as the Read bandwidth (KiB/second) graph in the Amazon EBS volume details page. This field is labeled Utilization metrics EBS read bytes per second (maximum) on the Export recommend ations page of the Compute Optimizer console, and as UtilizationMetricsVolumeRea dBytesPerSecondMaximum in the export CSV file.

API field name	Description
UtilizationMetricsVolumeReadOpsPerSe condMaximum	The maximum read operations per second metric of the current EBS volume observed during the lookback period (up to 14 days).
	This field is displayed as the Read operations (per second) graph in the Amazon EBS volume details page. This field is labeled Utilizati on metrics EBS read operations per second (maximum) on the Export recommendations page of the Compute Optimizer console, and as UtilizationMetricsVolumeReadOpsPerSe condMaximum in the export CSV file.
UtilizationMetricsVolumeWriteBytesPe rSecondMaximum	The maximum write bytes per second metric of the current EBS volume observed during the lookback period (up to 14 days).
	This field is displayed as the Write bandwidth (KiB/second) graph in the Amazon EBS volume details page. This field is labeled Utilization metrics EBS write bytes per second (maximum) on the Export recommend ations page of the Compute Optimizer console, and as UtilizationMetricsVolumeWriteBytesPerSecondMaximum in the export CSV file.

API field name	Description
UtilizationMetricsVolumeWriteOpsPerS econdMaximum	The maximum write operations per second metric of the current EBS volume observed during the lookback period (up to 14 days).
	This field is displayed as the Write operations (per second) graph in the Amazon EBS volume details page. This field is labeled Utilization metrics EBS write operations per second (maximum) on the Export recommendations page of the Compute Optimizer console, and as UtilizationMetricsVolumeWriteOpsPerS econdMaximum in the export CSV file.
CurrentConfigurationRootVolume	Contains the image used to boot the current instance during launch.
	This field is displayed as the Root volume column in the Amazon EBS volumes recommendations page of the Compute Optimizer console. This field is labeled Root volume on the Export recommendations page of the Compute Optimizer console, and labeled rootVolume in the export CSV file.
RootVolume	Contains the image used to boot the instance during launch.
	This field is displayed as the Root volume column in the Amazon EBS volumes recommendations and volume details pages of the Compute Optimizer console. This field is labeled Root volume on the Export recommendations page of the Compute Optimizer console, and labeled rootVolume in the export CSV file.

API field name	Description
VolumeArn	The Amazon Resource Name (ARN) of the current EBS volume.
	This field is not displayed in the Compute Optimizer console. This field is labeled EBS volume ARN on the Export recommendations page of the Compute Optimizer console, and as VolumeArn in the export CSV file.
CurrentPerformanceRisk	The performance risk rating for a current EBS volume.
	This field is displayed as the Current performance risk column in the EBS volumes recommendations page of the Compute Optimizer console. On the Export recommend ations page of the Compute Optimizer console, it's labeled as Current performance risk, and in the export CSV file, it's labeled as CurrentPerformanceRisk.
RecommendationOptionsSavingsOpportun ityPercentage	The estimated monthly savings possible as a percentage of monthly cost by adopting Compute Optimizer recommendations for an EBS volume.
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options savings opportunity percentage , and in the export CSV file, it's labeled as RecommendationOptionsSavingsOpportunityPercentage .

API field name	Description
RecommendationOptionsEstimatedMonthl ySavingsCurrency	The currency of the estimated monthly savings.
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options estimated monthly savings currency , and in the export CSV file, it's labeled as Recommend ationOptionsEstimatedMonthlySavingsCurrency .
RecommendationOptionsEstimatedMonthl ySavingsValue	The value of the estimated monthly savings. On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options estimated monthly savings value, and in the export CSV file, it's labeled as Recommend ationOptionsEstimatedMonthlySavingsV alue.

Lambda function recommendation fields

API field name	Description
AccountId	The AWS account ID in which the current Lambda function was created.
	This field is displayed as the Account ID column in the Lambda functions recommend ations and function details pages of the Compute Optimizer console. This field is labeled Account ID on the Export recommend ations page of the Compute Optimizer

API field name	Description
	console, and as accountId in the export CSV file.
CurrentConfigurationMemorySize	The amount of memory (in MB) currently configured on the current Lambda function. This field is displayed as the Current configure d memory column in the Lambda functions recommendations page of the Compute Optimizer console. This field is labeled Current configured memory on the Export recommendations page of the Compute Optimizer console, and as CurrentConfigurati onMemorySize in the export CSV file.
CurrentConfigurationTimeout	The timeout time currently configured on the current Lambda function. This field is displayed as the Timeout column in the Lambda functions recommendations page of the Compute Optimizer console. This field is labeled Timeout on the Export recommendations page of the Compute Optimizer console, and as CurrentConfigurati onTimeout in the export CSV file.

API field name	Description
CurrentCostAverage	The average current cost of the current Lambda function.
	This field is displayed listed as the Current cost (average) column in the Lambda functions recommendations page of the Compute Optimizer console. This field is labeled Current cost (average) on the Export recommendations page of the Compute Optimizer console, and as CurrentCo stAverage in the export CSV file.
CurrentCostTotal	The total current cost of the current Lambda function.
	This field is listed as the Current cost column in the Lambda functions recommendations page of the Compute Optimizer console. This field is labeled Current cost (total) on the Export recommendations page of the Compute Optimizer console, and as CurrentCostTotal in the export CSV file.
Finding	The finding classification for the current Lambda function. Lambda functions can be classified as under-provisioned, over-provisioned, or optimized. For more information, see Lambda function finding classifications.
	This field is listed as the Finding column in the Lambda functions recommendations page of the Compute Optimizer console. This field is labeled Finding on the Export recommend ations page of the Compute Optimizer console, and as finding in the export CSV file.

API field name	Description
FindingReasonCodes	The finding reason for the current Lambda function. Lambda functions can have a finding reason of memory under-provisioned, memory over-provisioned, insufficient data, or inconclusive. For more information, see Lambda finding classifications.
	This field is listed as the Finding reason column in the Lambda functions recommend ations page of the Compute Optimizer console. This field is labeled Finding reason on the Export recommendations page of the Compute Optimizer console, and as FindingRe asonCodes in the export CSV file.
FunctionArn	The Amazon Resource Name (ARN) of the current Lambda function.
	This field is not listed in the Compute Optimizer console. This field is labeled Function ARN on the Export recommend ations page of the Compute Optimizer console, and as FunctionArn in the export CSV file.
FunctionVersion	The version of the current Lambda function.
	This field is listed as the Function version column in the Lambda functions recommend ations page of the Compute Optimizer console. This field is labeled Function version on the Export recommendations page of the Compute Optimizer console, and as FunctionVersion in the export CSV file.

API field name	Description
LastRefreshTimestamp	The timestamp of when the Lambda function recommendation was last refreshed.
	This field isn't displayed in the Compute Optimizer console. This field is labeled Last refresh timestamp on the Export recommend ations page of the Compute Optimizer console, and as lastRefreshTimestamp in the export CSV file.
LookbackPeriodInDays	The number of preceding days for which Compute Optimizer analyzed metric data from the current Lambda function to generate the recommendation.
	This field isn't displayed in the Compute Optimizer console. This field is labeled Look-back period in days on the Export recommendations page of the Compute Optimizer console, and as lookBackPeriodInDays in the export CSV file.
NumberOfInvocations	The number of invocations for the current Lambda function during the look-back period. This field is displayed as the Invocations (count) graph in the Lambda function details page. This field is labeled Number of invocations on the Export recommendations page of the Compute Optimizer console, and as NumberOfInvocations in the export CSV file.

API field name	Description
RecommendationOptionsConfigurationMe morySize	The amount of memory (in MB) of the Lambda function recommendation. This field is listed as the Recommend ed configured memory in the Lambda functions recommendations page of the Compute Optimizer console. This field is labeled Recommended configured memory on the Export recommendations page of the Compute Optimizer console, and as RecommendationOptions_ <rank>_Configured.</rank>
RecommendationOptionsCostHigh	ationMemorySize in the export CSV file. The upper range cost of the Lambda function recommendation. This field is displayed as the Recommended cost (high) column in the Lambda functions recommendations page of the Compute Optimizer console. This field is labeled Recommended cost (high) on the Export recommendations page of the Compute Optimizer console, and as Recommend ationOptions_ <rank>_CostHigh in the export CSV file.</rank>

API field name	Description
RecommendationOptionsCostLow	The lower range cost of the Lambda function recommendation.
	This field is displayed as the Recommended cost (low) column in the Lambda functions recommendations page of the Compute Optimizer console. This field is labeled Recommended cost (low) on the Export recommendations page of the Compute Optimizer console, and as Recommend ationOptions_ <rank>_CostLow in the export CSV file.</rank>
RecommendationOptionsProjectedUtiliz ationMetricsDurationExpected	The projected duration of the Lambda function recommendation. This field is listed as the Projected duration (expected) column in the Lambda functions details page of the Compute Optimizer console. This field is labeled Utilizati on metrics Lambda duration milliseco nds expected on the Export recommend ations page of the Compute Optimizer console, and as RecommendationOpti ons_ <rank>_ProjectedUtilizationMetric sDurationExpected in the export CSV file.</rank>

API field name	Description
RecommendationOptionsProjectedUtiliz ationMetricsDurationLowerBound	The projected minimum amount of time that the recommended Lambda function spends processing events if the recommend ed Lambda function is used during the lookback period. The lower bound together with the upper bound form a range of time that the Lambda function recommendation option is projected to spend processing an event.
	This field is listed as the Projected duration (low) column in the Lambda functions details page of the Compute Optimizer console. This field is labeled Utilization metrics Lambda duration milliseconds (lower bound) on the Export recommendations page of the Compute Optimizer console, and as RecommendationOptions_ <rank>_Projecte dUtilizationMetricsDurationLowerBound in the export CSV file.</rank>

API field name	Description
RecommendationOptionsProjectedUtiliz ationMetricsDurationUpperBound	The projected maximum amount of time that the recommended Lambda function spends processing events if the recommend ed Lambda function is used during the lookback period. The lower bound together with the upper bound form a range of time that the Lambda function recommendation option is projected to spend processing an event. This field is listed as the Projected duration (high) column in the Lambda functions details page of the Compute Optimizer console. This field is labeled Utilization metrics Lambda duration milliseconds (upper bound) on the Export recommendations page of the Compute Optimizer console, and as RecommendationOptions_ <rank>_Projected UtilizationMetricsDurationUpperBound in the export CSV file.</rank>
UtilizationMetricsDurationAverage	The average duration metric of the current Lambda function observed during the lookback period (up to 14 days). This field is displayed as the Duration (average) column in the Lambda function details page of the Compute Optimizer console. This field is labeled Utilization metrics Lambda duration milliseconds (average) on the Export recommendations page of the Compute Optimizer console, and as UtilizationMetricsDurationAverage in the export CSV file.

API field name	Description
UtilizationMetricsDurationMaximum	The maximum duration metric of the current Lambda function observed during the lookback period (up to 14 days). This field is displayed as the Duration (maximum) column in the Lambda function details page of the Compute Optimizer console. This field is labeled Utilization metrics Lambda duration milliseconds (maximum) on the Export recommendations page of the Compute Optimizer console, and as UtilizationMetricsDurationMaximum in the export CSV file.
UtilizationMetricsMemoryAverage	The average memory utilization metric of the current Lambda function observed during the lookback period (up to 14 days). This field is displayed as the Used memory (average) column in the Lambda function details page of the Compute Optimizer console. This field is labeled Utilization metrics Lambda memory used MB (average) on the Export recommendations page of the Compute Optimizer console, and as Utilizati onMetricsMemoryAverage in the export CSV file.

API field name	Description
UtilizationMetricsMemoryMaximum	The maximum memory utilization metric of the current Lambda function observed during the lookback period (up to 14 days).
	This field is displayed as the Memory (maximum) column in the Lambda function details page of the Compute Optimizer console. This field is labeled Utilizati on metrics Lambda memory used MB (maximum) on the Export recommendations page of the Compute Optimizer console, and as UtilizationMetricsMemoryMaximum in the export CSV file.
CurrentPerformanceRisk	The performance risk rating for a current Lambda function. This field is displayed as the Current performance risk column in the Lambda functions recommendations page of the Compute Optimizer console. On the Export recommendations page of the Compute Optimizer console, it's labeled as Current performance risk, and in the export CSV file, it's labeled as CurrentPerformanceRisk.

API field name	Description
RecommendationOptionsSavingsOpportun ityPercentage	The estimated monthly savings possible as a percentage of monthly cost by adopting Compute Optimizer recommendations for a Lambda function.
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options savings opportunity percentage , and in the export CSV file, it's labeled as RecommendationOptionsSavingsOpportunityPercentage .
RecommendationOptionsEstimatedMonthl ySavingsCurrency	The currency of the estimated monthly savings.
	On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options estimated monthly savings currency , and in the export CSV file, it's labeled as Recommend ationOptionsEstimatedMonthlySavingsCurrency .
RecommendationOptionsEstimatedMonthl ySavingsValue	The value of the estimated monthly savings. On the Export recommendations page of the Compute Optimizer console, this field is labeled as Recommendation options estimated monthly savings value, and in the export CSV file, it's labeled as Recommend ationOptionsEstimatedMonthlySavingsV alue.

Recommendation fields for Amazon ECS services on Fargate

API field name	Description
AccountId	The AWS account ID that created the current Amazon ECS service on Fargate.
	This field is displayed as the Account ID column in the Amazon ECS services recommendations and details pages of the Compute Optimizer console. This field is labeled Account ID on the Export recommend ations page of the Compute Optimizer console, and labeled accountId in the export CSV file.
ServiceArn	The Amazon Resource Name (ARN) of the current Amazon ECS service. This field isn't displayed in the Compute Optimizer console. This field is labeled Service ARN on the Export recommendations page of the Compute Optimizer console, and labeled serviceArn in the export CSV file.
LookbackPeriodInDays	The number of preceding days Compute Optimizer analyzed metric data from the current service to generate the recommend ation.
	This field isn't displayed in the Compute Optimizer console. This field is labeled Lookback period in days on the Export recommendations page of the Compute Optimizer console, and labeled lookBackP eriodInDays in the export CSV file.
LastRefreshTimestamp	The timestamp of when the Amazon ECS service recommendation was last refreshed.

API field name	Description
	This field isn't displayed in the Compute Optimizer console. This field is labeled Last refresh timestamp on the Export recommend ations page of the Compute Optimizer console, and labeled lastRefreshTimesta mp_UTC in the export CSV file.
LaunchType	The capacity provider for the current Amazon ECS service.
	This field is displayed as the Launch type column in the Amazon ECS services recommendations page of the Compute Optimizer console. This field is labeled Launch type on the Export recommendations page of the Compute Optimizer console, and as launchType in the export CSV file.
CurrentPerformanceRisk	The performance risk rating for the current Amazon ECS service.
	This field is displayed as the Current performance risk column in the Amazon ECS services recommendations page of the Compute Optimizer console. This field is labeled Current performance risk on the Export recommendations page of the Compute Optimizer console, and labeled CurrentPerformanceRisk in the export CSV file.

API field name	Description
CurrentServiceConfigurationMemory	The memory size of the current Amazon ECS service tasks.
	This field is displayed as the Current configure d memory size column in the Amazon ECS services recommendations page of the Compute Optimizer console. This field is labeled Current configured memory on the Export recommendations page of the Compute Optimizer console, and labeled currentServiceConfiguration_memory in the export CSV file.
CurrentServiceConfigurationCpu	The CPU size of the current Amazon ECS service tasks. This field is displayed as the Current configure d CPU size column in the Amazon ECS services recommendations page of the Compute Optimizer console. This field is labeled Current configured CPU on the Export recommendations page of the Compute Optimizer console, and labeled currentSe rviceConfiguration_cpu in the export CSV file.

API field name	Description
CurrentServiceConfigurationTaskDefinitionArn	The task definition ARN of the current Amazon ECS service.
	This field is displayed as the Task definitio n name column in the Amazon ECS services recommendations page of the Compute Optimizer console. This field is labeled Task definition name on the Export recommend ations page of the Compute Optimizer console, and labeled currentServiceConfiguration_taskDefinitionArn in the export CSV file.
CurrentServiceConfigurationAutoScalingConfiguration	The Auto Scaling configuration of your current Amazon ECS service. This field is displayed as the Auto Scaling configuration column in the Amazon ECS service details page of the Compute Optimizer console. This field is labeled Auto Scaling configuration on the Export recommend ations page of the Compute Optimizer console, and labeled currentServiceConfiguration_autoScalingConfiguration in the export CSV file.

API field name	Description
CurrentServiceContainerConfigurations	The current container configurations of the current Amazon ECS service task.
	This field is displayed in the Compare current settings with recommended container size table of the Compute Optimizer console's service details page. This field is labeled Container configurations on the Export recommendations page of the Compute Optimizer console. In the export CSV file, the following labels are populated:
	 currentServiceContainerConfiguration _container_number _containerName currentServiceContainerConfiguration _container_number _memory
	 currentServiceContainerConfiguration _container_number _memoryRe servation
	 currentServiceContainerConfiguration _container_number _cpu
UtilizationMetricsCpuMaximum	The maximum percentage of CPU capacity that's used in the Amazon ECS service.
	This field is displayed as the CPU utilization (percent) graph in the Amazon ECS service details page of the Compute Optimizer console. This field is labeled Projected utilization max CPU metric on the Export recommendations page of the Compute Optimizer console, and labeled utilizati onMetrics_CPU_MAXIMUM in the export CSV file.

API field name	Description
UtilizationMetricsMemoryMaximum	The maximum percentage of memory capacity that's used in the Amazon ECS service.
	This field is displayed as the Memory utilizati on (percent) graph in the Amazon ECS service details page of the Compute Optimizer console. This field is labeled Projected utilization max memory metric on the Export recommendations page of the Compute Optimizer console, and labeled utilizati onMetrics_MEMORY_MAXIMUM in the export CSV file.
Findings	The finding classification for the Amazon ECS service. Amazon ECS services on Fargate can be classified as under-provisioned, over-provisioned, or optimized. For more information, see <u>Finding classifications</u> .
	This field is displayed as the Findings column in the Amazon ECS services recommendations page of the Compute Optimizer console. This field is labeled Findings on the Export recommendations page of the Compute Optimizer console, and labeled findings in the export CSV file.

API field name	Description
FindingReasonCodes	The finding reasons column describes which specifications of the current Amazon ECS service were under-provisioned, over-provisioned, or optimized. This field is displayed as the Finding reasons column in the Amazon ECS services recommendations page of the Compute Optimizer console. This field is labeled Finding reason codes on the Export recommendations page of the Compute Optimizer console, and labeled findingRe asonCodes_ <code> in the export CSV file. The <code> portion of the label identifies the service specifications (CPU or memory) that are under-provisioned, over-provisioned, or optimized.</code></code>
RecommendationOptionsMemory	The memory size of the Amazon ECS service recommendation. This field is displayed as the Memory size column in the Amazon ECS service details page of the Compute Optimizer console. This field is labeled Recommendation options memory on the Export recommend ations page of the Compute Optimizer console, and labeled recommendationOpti ons_ <rank>_memory in the export CSV file.</rank>

API field name	Description
RecommendationOptionsCpu	The CPU size of the Amazon ECS service recommendation.
	This field is displayed as the CPU size column in the Amazon ECS service details page of the Compute Optimizer console. This field is labeled Recommendation options CPU on the Export recommendations page of the Compute Optimizer console, and labeled recommendationOptions_<rank>_cpu</rank> in the export CSV file.
RecommendationOptionsSavingsOpportun ityPercentage	The approximate monthly cost savings percentage after you adjust the configurations of your Amazon ECS service to Compute Optimizer's recommended configuration.
	This field is labeled Recommendation options savings opportunity percentage on the Export recommendations page of the Compute Optimizer console, and labeled RecommendationOptionsSavingsOpportunityPercentage in the export CSV file.
RecommendationOptionsEstimatedMonthl ySavingsCurrency	The currency of the estimated monthly savings.
	This field is labeled Recommendation options estimated monthly savings currency on the Export recommendations page of the Compute Optimizer console, and labeled RecommendationOptionsEstimatedMonthl ySavingsCurrency in the export CSV file.

API field name	Description
RecommendationOptionsEstimatedMonthl ySavingsValue	The value of the estimated monthly savings. This field is labeled Recommendation options estimated monthly savings value on the Export recommendations page of the Compute Optimizer console, and labeled RecommendationOptionsEstimatedMonthl ySavingsValue in the export CSV file.
RecommendationOptionsContainerRecommendations	The recommedned memory and CPU size of the containers in the Amazon ECS service. This field is displayed in the Compare current settings with recommended container size table of the Compute Optimizer console's service details page. This field is labeled Container recommendations on the Export recommendations page of the Compute Optimizer console. In the export CSV file, the following labels are populated: • recommendationOpti ons_ <index>_containerName_<index> • recommendationOpti ons_<index>_container rMemory_container_number • recommendationOpti ons_<index>_containerMemoryRe servation_container_number • recommendationOpti ons_<index>_container_number • recommendationOpti ons_<index>_container_number • recommendationOpti ons_<index>_containerCpu_container_number _number</index></index></index></index></index></index></index>

API field name	Description
RecommendationOptionsProjectedUtiliz ationMetricsCpuMaximum	The projected maximum CPU utilization metric of the Amazon ECS service recommendation. If you used the recommended Amazon ECS service during the look-back period, this value defines the maximum CPU utilization of the recommended Amazon ECS service. This field is displayed as an overlay on the CPU utilization (percent) metric graph in the Amazon ECS service details page of the Compute Optimizer console. This field is labeled Recommendation options projected utilization metrics CPU maximum on the Export recommendations page of the Compute Optimizer console, and labeled recommendationOptions_ <rank>_projecte dUtilizationMetrics_CPU_MAXIMUM in the export CSV file.</rank>

API field name	Description
RecommendationOptionsProjectedUtiliz ationMetricsMemoryMaximum	The projected maximum memory utilization metric of the Amazon ECS service recommend ation. If you used the recommended Amazon ECS service during the look-back period, this value defines the maximum memory utilizati on of the recommended Amazon ECS service. This field is displayed as an overlay on the Memory utilization (percent) metric graph in the Amazon ECS service details page of the Compute Optimizer console. This field is labeled Recommendation options projected utilization metrics memory maximum on the Export recommendations page of the Compute Optimizer console, and labeled recommendationOptions_ <rank>_projecte dUtilizationMetrics_MEMORY_MAXIMUM in the export CSV file.</rank>

Recommendation fields for commercial software licenses

- AccountId
- ResourceArn
- LookbackPeriodInDays
- LastRefreshTimestamp
- Findings
- FindingReasonCodes
- NumberOfCores
- CurrentLicenseConfigurationInstanceType
- CurrentLicenseConfigurationOperatingSystem
- CurrentLicenseConfigurationLicenseName
- CurrentLicenseConfigurationLicenseEdition

- CurrentLicenseConfigurationLicenseModel
- CurrentLicenseConfigurationLicenseVersion
- MetricsSource
- RecommendationOptionsOperatingSystem
- RecommendationOptionsLicenseEdition
- RecommendationOptionsLicenseModel
- RecommendationOptionsSavingsOpportunityPercentage
- RecommendationOptionsEstimatedMonthlySavingsCurrency
- RecommendationOptionsEstimatedMonthlySavingsValue
- Tags

Recommendation fields for Aurora and RDS databases

- AccountId
- ResourceArn
- DBClusterIdentifier
- Engine
- EngineVersion
- Idle
- MultiAZDBInstance
- ClusterWriter
- PromotionTier
- CurrentDBInstanceClass
- CurrentStorageConfigurationStorageType
- CurrentStorageConfigurationAllocatedStorage
- CurrentStorageConfigurationMaxAllocatedStorage
- CurrentStorageConfigurationIOPS
- CurrentStorageConfigurationStorageThroughput
- CurrentStorageEstimatedMonthlyVolumeIOPsCostVariation
- CurrentInstanceOnDemandHourlyPrice
- CurrentStorageOnDemandMonthlyPrice

- CurrentStorageEstimatedClusterInstanceOnDemandMonthlyCost
- CurrentStorageEstimatedClusterStorageOnDemandMonthlyCost
- CurrentStorageEstimatedClusterStorageIOOnDemandMonthlyCost
- LookbackPeriodInDays
- UtilizationMetricsCpuMaximum
- UtilizationMetricsMemoryMaximum
- UtilizationMetricsEBSVolumeStorageSpaceUtilizationMaximum
- UtilizationMetricsNetworkReceiveThroughputMaximum
- UtilizationMetricsNetworkTransmitThroughputMaximum
- UtilizationMetricsEBSVolumeReadIOPSMaximum
- UtilizationMetricsEBSVolumeWriteIOPSMaximum
- UtilizationMetricsEBSVolumeReadThroughputMaximum
- UtilizationMetricsEBSVolumeWriteThroughputMaximum
- UtilizationMetricsDatabaseConnectionsMaximum
- UtilizationMetricsStorageNetworkRecieveThroughputMaximum
- UtilizationMetricsStorageNetworkTransmitThroughputMaximum
- UtilizationMetricsAuroraMemoryHealthStateMaximum
- UtilizationMetricsAuroraMemoryNumDeclinedSqlMaximum
- UtilizationMetricsAuroraMemoryNumKillConnTotalMaximum
- UtilizationMetricsAuroraMemoryNumKillQueryTotalMaximum
- UtilizationMetricsReadIOPSEphemeralStorageMaximum
- UtilizationMetricsWriteIOPSEphemeralStorageMaximum
- UtilizationMetricsVolumeBytesUsedAverage
- UtilizationMetricsVolumeReadIOPsAverage
- UtilizationMetricsVolumeWriteIOPsAverage
- InstanceFinding
- InstanceFindingReasonCodes
- StorageFinding
- StorageFindingReasonCodes
- InstanceRecommendationOptionsDBInstanceClass

- InstanceRecommendationOptionsRank
- InstanceRecommendationOptionsPerformanceRisk
- InstanceRecommendationOptionsProjectedUtilizationMetricsCpuMaximum
- StorageRecommendationOptionsStorageType
- StorageRecommendationOptionsAllocatedStorage
- StorageRecommendationOptionsMaxAllocatedStorage
- StorageRecommendationOptionsIOPS
- StorageRecommendationOptionsStorageThroughput
- StorageRecommendationOptionsRank
- StorageRecommendationOptionsEstimatedMonthlyVolumeIOPsCostVariation
- InstanceRecommendationOptionsInstanceOnDemandHourlyPrice
- InstanceRecommendationOptionsSavingsOpportunityPercentage
- InstanceRecommendationOptionsEstimatedMonthlySavingsCurrency
- InstanceRecommendationOptionsEstimatedMonthlySavingsValue
- InstanceRecommendationOptionsSavingsOpportunityAfterDiscountsPercentage
- InstanceRecommendationOptionsEstimatedMonthlySavingsCurrencyAfterDiscounts
- InstanceRecommendationOptionsEstimatedMonthlySavingsValueAfterDiscounts
- StorageRecommendationOptionsOnDemandMonthlyPrice
- StorageRecommendationOptionsEstimatedClusterInstanceOnDemandMonthlyCost
- StorageRecommendationOptionsEstimatedClusterStorageOnDemandMonthlyCost
- StorageRecommendationOptionsEstimatedClusterStorageIOOnDemandMonthlyCost
- StorageRecommendationOptionsSavingsOpportunityPercentage
- StorageRecommendationOptionsEstimatedMonthlySavingsCurrency
- StorageRecommendationOptionsEstimatedMonthlySavingsValue
- StorageRecommendationOptionsSavingsOpportunityAfterDiscountsPercentage
- StorageRecommendationOptionsEstimatedMonthlySavingsCurrencyAfterDiscounts
- StorageRecommendationOptionsEstimatedMonthlySavingsValueAfterDiscounts
- EffectiveRecommendationPreferencesCpuVendorArchitectures
- EffectiveRecommendationPreferencesEnhancedInfrastructureMetrics
- EffectiveRecommendationPreferencesLookBackPeriod

Recommendations file 281

- EffectiveRecommendationPreferencesSavingsEstimationMode
- LastRefreshTimestamp
- Tags

Recommendation fields for Idle resources

- AccountId
- ResourceArn
- ResourceID
- ResourceType
- Findings
- FindingReasons
- RecommendationOptionsEstimatedMonthlySavingsCurrency
- RecommendationOptionsEstimatedMonthlySavingsValue
- UtilizationMetricsCpuMaximum
- UtilizationMetricsMemoryMaximum
- UtilizationMetricsCpuMaximum
- UtilizationMetricsMemoryMaximum
- UtilizationMetricsNetworkInMaximum
- UtilizationMetricsNetworkOutMaximum
- UtilizationMetricsEBSVolumeReadIOPSMaximum
- UtilizationMetricsEBSVolumeWriteIOPSMaximum
- UtilizationMetricsDatabaseConnectionsMaximum
- LookbackPeriodInDays
- LastRefreshTimestamp
- Tags

Metadata file

A metadata JSON file is output with every export job. The file includes the schema information for the associated recommendations file, such as the dialect of the data, column definitions, and

column descriptions. The file is meant to help parse the export file, and describe its contents. The metadata file is saved in the same S3 bucket and prefix that you specified for the export file.

The metadata file includes the following properties for each exported column or field:

- Name The export field recommendations column name.
- **Titles** The user-friendly recommendations column name.
- Datatype The type of data for the column.
- **Null** The string to expect if the column is null.
- **Required** Indicates if the column data is required.

The following is an example of the information that's included in the metadata file.

```
{
  "@context": [
    "http://www.w3.org/ns/csvw"
  ],
  "url": "us-east-1-2020-05-18T001229Z-f264881a-bfb3-4676-9b14-8d1243599ebb.csv",
  "dc:title": "EC2 Instance Recommendations",
  "dialect": {
    "encoding": "utf-8",
    "lineTerminators": [
      "\n"
    ],
    "doubleQuote": true,
    "skipRows": 0,
    "header": true,
    "headerRowCount": 1,
    "delimiter": ",",
    "skipColumns": 0,
    "skipBlankRows": false,
    "trim": false
  },
  "dc:modified": {
    "@value": "2020-05-20",
    "@type": "xsd:date"
  },
  "tableSchema": {
    "columns": [
        "name": "accountId",
```

```
"titles": "Account ID",
  "datatype": "string",
  "null": "",
  "required": false
},
  "name": "instanceArn",
  "titles": "Instance Arn",
  "datatype": "string",
  "null": "",
  "required": false
},
  "name": "utilizationMetrics_CPU_MAXIMUM",
  "titles": "Cpu Maximum Utilization Metrics",
  "datatype": "double",
  "null": "",
  "required": false
},
  "name": "recommendations_count",
  "titles": "Number of recommendations",
  "datatype": "integer",
 "required": true
},
{
  "name": "recommendationOptions_1_instanceType",
  "titles": "Recommendation 1 Instance Type",
  "datatype": "integer",
  "null": "",
  "required": false
},
  "name": "lastRefreshTimestamp_UTC",
  "titles": "Last Resfreshed Timestamp UTC",
  "datatype": "datetime",
  "format": "yyyy-MM-dd HH:mm:ss",
  "null": "",
  "required": false
},
  "name": "errorCode",
  "titles": "Error Code",
  "datatype": "string",
```

```
"required": true
},
{
    "name": "errorMessage",
    "titles": "Error Message",
    "datatype": "string",
    "required": true
}

}
}
```

Troubleshooting in Compute Optimizer

This section covers troubleshooting why fails or errors might occur while using Compute Optimizer. The solutions provided in this section show how you can mitigate these problems.

Topics

- Failed to create service-linked role
- Failed to enable trusted access
- Failed to get or update enhanced infrastructure metrics recommendation preferences
- Troubleshooting failed export jobs

Failed to create service-linked role

Description

Accounts show a Failed opt-in status, and a description of Failed to create service-linked role.

Cause

Compute Optimizer uses AWS Identity and Access Management (IAM) service-linked roles. These roles include all of the permissions that the service requires to call other AWS services on your behalf. You must configure permissions to allow an IAM entity (a user, group, or role) to create a service-linked role for Compute Optimizer. The user who tried to opt in to Compute Optimizer might not have the permissions required to have the service-linked role created.

Solution

Add the required permissions to the user who performs the Compute Optimizer opt-in. For more information, see the section called "Service-linked role permissions".

Failed to enable trusted access

Description

Accounts show a Failed opt-in status, and a description of Failed to enable trusted access.

Cause

You can use *trusted access* to enable Compute Optimizer to perform tasks in your organization and its accounts on your behalf. For more information about AWS Organizations trusted access, see <u>Using AWS Organizations with other AWS services</u> in the *AWS Organizations User Guide*. When you opt in using your organization's management account and include all member accounts within the organization, trusted access for Compute Optimizer is automatically enabled in your organization account. The user who tried to opt in to Compute Optimizer might not have the permissions required to have trusted access enabled.

Solution

Add the required permissions to the user who perform the Compute Optimizer opt-in. For more information, see <u>Permissions required to enable trusted access</u> in the *AWS Organizations User Guide*. After you add the required permissions, opt in to Compute Optimizer again using your organization's management account and include all member accounts within the organization. For more information, see the section called "Opting in to Compute Optimizer".

Failed to get or update enhanced infrastructure metrics recommendation preferences

Description

A banner is displayed that indicates that the Compute Optimizer console could not get or update enhanced infrastructure metrics recommendation preferences.

Cause

You might not have the permissions required to view or update recommendation preferences.

Solution

Add the required permissions to the user who will view or edit recommendation preferences. For more information, see <u>Policies to grant access to manage Compute Optimizer recommendation</u> preferences.

Troubleshooting failed export jobs

When you try to export your resource recommendations, you might experience one of the following error messages or issues. Use the information provided to try to resolve the error before trying to export your recommendations again.

You don't have permissions to the Amazon S3 bucket specified. Confirm the permissions of your S3 bucket and try again.

Confirm that you have configured the required permissions on your Amazon S3 bucket. For more information, see Specifying an existing S3 bucket for your recommendations export.

The Amazon S3 bucket specified is public. Only private S3 buckets are supported.

Your Amazon S3 bucket must be set to block public access. For more information, see <u>Blocking</u> public access to your Amazon S3 storage in the *Amazon Simple Storage Service User Guide*.

You created a scripted or automatic export job but there is recommendation data missing from your Amazon S3 bucket.

Call the DescribeRecommendationExportJobs API to verify the final status of the export job. If the export job failed, try to call the ExportResourceRecommendations API again. For more information, see DescribeRecommendationExportJobs in the AWS Compute Optimizer API Reference.

Security in AWS Compute Optimizer

Cloud security at AWS is the highest priority. As an AWS customer, you benefit from a data center and network architecture that is built to meet the requirements of the most security-sensitive organizations.

Security is a shared responsibility between AWS and you. The <u>shared responsibility model</u> describes this as security *of* the cloud and security *in* the cloud:

- Security of the cloud AWS is responsible for protecting the infrastructure that runs AWS services in the AWS Cloud. AWS also provides you with services that you can use securely. Third-party auditors regularly test and verify the effectiveness of our security as part of the <u>AWS</u>
 <u>Compliance Programs</u>. To learn about the compliance programs that apply to AWS Compute
 Optimizer, see AWS Services in Scope by Compliance Program.
- **Security in the cloud** Your responsibility is determined by the AWS service that you use. You are also responsible for other factors including the sensitivity of your data, your company's requirements, and applicable laws and regulations.

This documentation helps you understand how to apply the shared responsibility model when using Compute Optimizer. The following topics show you how to configure Compute Optimizer to meet your security and compliance objectives. You also learn how to use other AWS services that help you to monitor and secure your Compute Optimizer resources.

Topics

- Data protection in AWS Compute Optimizer
- Compliance validation for AWS Compute Optimizer

Data protection in AWS Compute Optimizer

The AWS <u>shared responsibility model</u> applies to data protection in AWS Compute Optimizer. As described in this model, AWS is responsible for protecting the global infrastructure that runs all of the AWS Cloud. You are responsible for maintaining control over your content that is hosted on this infrastructure. This content includes the security configuration and management tasks for the AWS services that you use. For more information about data privacy, see the <u>Data Privacy FAQ</u>. For information about data protection in Europe, see the <u>AWS Shared Responsibility Model and GDPR</u> blog post on the *AWS Security Blog*.

Data protection 289

For data protection purposes, we recommend that you protect AWS account credentials and set up individual user accounts with AWS Identity and Access Management (IAM). That way each user is given only the permissions necessary to fulfill their job duties. We also recommend that you secure your data in the following ways:

- Use multi-factor authentication (MFA) with each account.
- Use SSL/TLS to communicate with AWS resources. We recommend TLS 1.2 or later.
- Set up API and user activity logging with AWS CloudTrail.
- Use AWS encryption solutions, along with all default security controls within AWS services.
- Use advanced managed security services such as Amazon Macie, which assists in discovering and securing personal data that is stored in Amazon S3.
- If you require FIPS 140-2 validated cryptographic modules when accessing AWS through a command line interface or an API, use a FIPS endpoint. For more information about the available FIPS endpoints, see Federal Information Processing Standard (FIPS) 140-2.

We strongly recommend that you never put confidential or sensitive information, such as your customers' email addresses, into tags or free-form fields such as a **Name** field. This includes when you work with Compute Optimizer or other AWS services using the console, API, AWS CLI, or AWS SDKs. Any data that you enter into tags or free-form fields used for names may be used for billing or diagnostic logs. If you provide a URL to an external server, we strongly recommend that you do not include credentials information in the URL to validate your request to that server.

Compliance validation for AWS Compute Optimizer

Third-party auditors assess the security and compliance of AWS Compute Optimizer as part of multiple AWS compliance programs. AWS Compute Optimizer is FedRAMP authorized for GovCloud and is in scope for that compliance program.

For a list of AWS services in scope of specific compliance programs, see <u>AWS Services in Scope by</u> Compliance Program. For general information, see AWS Compliance Programs.

Your compliance responsibility when using Compute Optimizer is determined by the sensitivity of your data, your company's compliance objectives, and applicable laws and regulations. AWS provides the following resources to help with compliance:

Compliance validation 290

<u>Security and Compliance Quick Start Guides</u> – These deployment guides discuss architectural
considerations and provide steps for deploying security- and compliance-focused baseline
environments on AWS.

- <u>AWS Compliance Resources</u> This collection of workbooks and guides might apply to your industry and location.
- <u>Evaluating Resources with Rules</u> in the *AWS Config Developer Guide* The AWS Config service assesses how well your resource configurations comply with internal practices, industry guidelines, and regulations.
- <u>AWS Security Hub</u> This AWS service provides a comprehensive view of your security state within AWS that helps you check your compliance with security industry standards and best practices.

Compliance validation 291

Document history for AWS Compute Optimizer

The following table describes the documentation for this release of AWS Compute Optimizer.

• API version: 2019-11-30

• Latest documentation update: August 15, 2022

The following table describes the documentation for this release of Compute Optimizer.

Change	Description	Date
Expanded the features of EC2 Auto Scaling group recommendations	Compute Optimizer now generates rightsizing recommendations for EC2 Auto Scaling groups that use G or P instance types, and idle recommendations for groups with scaling policies and groups that have been scaled down to a single instance. For more information, see Supported Amazon EC2 Auto Scaling groups.	June 16, 2025
Amazon Aurora I/O-Optim ized recommendations	Compute Optimizer now provides Aurora I/O-Optim ized recommendations for Amazon Aurora DB cluster storage. For more informati on, see Viewing Aurora and RDS database recommend ations.	June 2, 2025
Compute Optimizer supports new EC2 instance types	Compute Optimizer now provides recommendations for 57 new Amazon EC2	April 10, 2025

instance types, including the I7ie, I8g, High Memory (U-1), P5e, and G6e instances . For more information, see <u>Supported Amazon EC2</u> instance types.

Updated an AWS managed policy for AWS Compute
Optimizer

The ComputeOptimizerSe rviceRolePolicy AWS managed policy for AWS Compute Optimizer was updated. For more informati on, see AWS managed policies for AWS Compute Optimizer.

January 9, 2025

Expanded the features of EC2 Auto Scaling group recommendations

Compute Optimizer now generates recommendations for EC2 Auto Scaling groups that have mixed instance types, scaling policies, or both. For more information, see <u>Viewing EC2 Auto Scaling</u> group recommendations.

January 9, 2025

<u>Updated AWS managed</u> <u>policies for AWS Compute</u> <u>Optimizer</u> The ComputeOptimizerRe adOnlyAccess AWS managed policy for AWS Compute Optimizer was updated. For more informati on, see AWS managed policies for AWS Compute Optimizer.

November 20, 2024

Compute Optimizer generates recommendations for idle resources

Compute Optimizer helps you identify idle resources that can be deleted or stopped to reduce your AWS cloud costs. For more information, see <u>Viewing idle resource</u> recommendations.

November 20, 2024

Amazon RDS DB recommend ations

Compute Optimizer now generates Amazon RDS rightsizing recommendations for Aurora MySQL and Aurora PostgreSQL database engines. For more information, see Viewing RDS DB instance recommendations.

November 20, 2024

Compute Optimizer supports new EC2 instance types

Compute Optimizer now provides recommendations for 80 new Amazon EC2 instance types, including the P4, P5, G5, G6, C7i-flex, C8g, R8g, and X8g instances . For more information, see Supported Amazon EC2 instance types.

October 1, 2024

<u>Updated AWS managed</u> <u>policies for AWS Compute</u> <u>Optimizer</u> The ComputeOptimizerRe adOnlyAccess AWS managed policy for AWS Compute Optimizer was updated. For more informati on, see AWS managed policies for AWS Compute Optimizer.

June 20, 2024

Amazon RDS DB recommend ations

Compute Optimizer now generates Amazon RDS rightsizing recommendations for Amazon RDS MySQL and Amazon RDS PostgreSQL database engines. For more information, see <u>Viewing RDS DB instance recommend ations</u>.

June 20, 2024

Compute Optimizer supports
rightsizing preferences
for memory ultilization
headroom

In Compute Optimizer you can use rightsizing recommendation preferenc es to customize the memory ultilization headroom settings you want Compute Optimizer to use when generating your Amazon EC2 instance recommendations. For more information, see Rightsizing recommendation preferences.

March 28, 2024

Compute Optimizer supports new EC2 instance types

Compute Optimizer now provides recommendations for 51 new EC2 instance types, including the C7i, r7i, r8g, x2idn, x2iedn, and hpc7a instances. For more informati on, see Supported Amazon EC2 instance types.

March 25, 2024

Compute Optimizer supports rigthsizing recommendation preferences

In Compute Optimizer you can use rightsizing recommendation preferenc es to customize the settings you want Compute Optimizer to consider when generatin g your Amazon EC2 and Auto Scaling group instance recommendations. For more information, see Rightsizing recommendation preferences.

November 26, 2023

Compute Optimizer supports new specific discounts for rigthsizing recommendations

You can now allow Compute Optimizer to analyze specific pricing discounts, such Saving Plans and Reserved Instances, when generating the estimated cost savings of rightsizing recommendations. For more information, see Savings estimation mode. November 26, 2023

Compute Optimizer supports
new EC2 instance types and
EBS volumes

Compute Optimizer now provides recommendations for 153 new Amazon EC2 instance types, including the M7a, M7i, M7i-flex, M6a, C7gn, R6a, R7g, X2iezn, 14g, 14i, Hpc7g, and Hpc6id instances. Additionally, Compute Optimizer now supports Provisioned IOPS Amazon EBS volumes that are attached to multiple EC2 instances. For more informati on, see AWS resources supported by Compute Optimizer.

September 28, 2023

Compute Optimizer supports
GPU-based EC2 instances

Compute Optimizer now provides rightsizing recommendations for G4dn and P3 instances. For more information, see <u>Amazon EC2</u> instance requirements.

September 5, 2023

Compute Optimizer generates
commercial software license
recommendations

Compute Optimizer now generates license recommend ations for commercial software that run on Amazon EC2. Compute Optimizer only provides Microsoft SQL Server license recommendations. For more information, see Viewing commercial software license recommendations.

August 28, 2023

Compute Optimizer supports
tag filtering and inferred
workload type filtering for
recommendations

In Compute Optimizer you can now filter your EC2 instance, EBS volume, Lambda function, and ECS service recommendations by tag key and tag value. Additionally, you can also filter your EC2 recommend ations by inferred workload types. For more information, see Viewing EC2 instances recommendations.

May 1, 2023

Compute Optimizer supports new EC2 instance types

Compute Optimizer now provides recommendations for 61 new EC2 instance types, including the C6in, R6in, R6idn, M6in, and M6idn instances. For more information, see Amazon EC2 instance requirements.

March 30, 2023

Compute Optimizer supports new EBS volume types

Compute Optimizer now provides recommendations for three new EBS volume types: HDD st1 and sc1, and Provisioned IOPS SSD io2 Block Express. For more information, see Amazon EBS volume requirements.

March 30, 2023

Compute Optimizer supports EC2 suspension workloads

Compute Optimizer can now combine utilization data from intermittent workloads to generate EC2 recommend ations. For more informati on, see <u>Amazon EC2 instance</u> requirements.

March 30, 2023

Compute Optimizer generates recommendations for Amazon ECS services on Fargate

Compute Optimizer now generates recommendations for Amazon ECS services on Fargate. For more informati on, see Recommendations for Amazon ECS services on Fargate.

December 22, 2022

Compute Optimizer launches
external metrics ingestion
feature

Compute Optimizer can now ingest and analyze external EC2 memory utilizati on metrics from one of the four observability products to generate EC2 rightsizi ng recommendations that provide you with additional savings and enhanced performance. For more information, see External metrics ingestion.

November 28, 2022

Compute Optimizer supports
new EC2 instance types and
Windows memory metrics

Compute Optimizer now provides recommendations for 37 new EC2 instance types, including the M6i.metal, C6i.metal, C7g, and Hpc6a instances. Additionally, Compute Optimizer now prioritizes the Available MBytes memory metric when generating recommend ations for EC2 Windows instances. For more informati on, see Amazon EC2 instance requirements and EC2 instance metrics.

October 7, 2022

Compute Optimizer launches delegated administrator feature

Now in Compute Optimizer, an organization's managemen t accounts can delegate a member account as an administrator for their organization. The delegated administrator can access and manage Compute Optimizer recommendations. The delegated administrator can also set recommend ation preferences for your entire organization without the need to access the management account. For more information, see Delegate an administrator account.

August 15, 2022

Updated an AWS managed policy for AWS Compute
Optimizer

The ComputeOptimizerSe rviceRolePolicy AWS managed policy for AWS Compute Optimizer was updated. For more informati on, see AWS managed policies for AWS Compute Optimizer.

July 25, 2022

Compute Optimizer adds
support for additional
Amazon EC2 instance types

Compute Optimizer now supports C5d, C6a, C6i, I2, Im4gn, Is4gen, M5ad, M6a, M6i, and R6i Amazon EC2 instance types. These instance types are supported in all the AWS Regions where both these instance types and Compute Optimizer are available. This update doesn't apply in the China (Beijing) and China (Ningxia) Regions. For more informati on, see Amazon EC2 instance requirements.

April 7, 2022

Workload-aware recommend ations and migration effort now available

With the new inferred workload types feature, Compute Optimizer can infer the applications that might be running on your resources . Examples include EC2 instances and Auto Scaling groups. Compute Optimizer does this by analyzing the attributes of your resources , such as resource names, tags, and configuration. By inferring applications, Compute Optimizer can generate recommendations that take your applications into account. It can also identify the level of effort required to migrate from the current instance type to the recommended instance type. For more information, see Inferred workload type.

January 10, 2022

View savings and performan ce improvement opportuni ties for your resources, and activate enhanced infrastru cture metrics

Identify your biggest cost and performance improveme nt opportunities in the new Savings opportunity and **Performance improveme nt opportunity** sections of the dashboard. For more information, see Viewing the **AWS Compute Optimizer** dashboard. You can also now extend the metrics analysis lookback period for EC2 instances and Auto Scaling groups up to three months. By default, the lookback period is 14 days. To do this, activate enhanced infrastru cture metrics. The enhanced infrastructure metrics feature is a paid feature of Compute Optimizer. For more informati on, see Activating enhanced

November 29, 2021

Updated AWS managed policies for AWS Compute Optimizer

The ComputeOptimizerSe rviceRolePolicy and ComputeOptimizerRe adOnlyAccess AWS managed policies for AWS Compute Optimizer were updated. For more informati on, see AWS managed policies for AWS Compute Optimizer.

infrastructure metrics.

November 29, 2021

AWS Graviton based instance recommendations

Compute Optimizer now provides the price and performance impact for running your workload on AWS Graviton based instances . For more information, see **AWS Graviton-based instance** recommendations. If your account is your organizat ion's management account, you can now also view the member accounts of an organization that are opted in to Compute Optimizer. For more information, see Viewing the accounts opted in to AWS Compute Optimizer.

August 26, 2021

Amazon EC2 instance recommendations enhanceme nts

Compute Optimizer now supports a wider range of Amazon EC2 instance types. Compute Optimizer evaluates a wider range of instance metrics to generate recommendations and provides finding instance recommendations reasons. Compute Optimizer also describes the platform differences between the current instance and the recommended instance type. For more information, see Amazon EC2 instance requirements, EC2 instance metrics, Finding reasons, and Platform differences.

May 24, 2021

Recommendations export for Amazon EBS volumes and Lambda functions You can now export recommendations for Amazon EBS volumes and Lambda functions to Amazon S3. For more information, see Exporting recommendations.

May 18, 2021

Adding documentation for AWS managed policies Compute Optimizer now tracks changes for its AWS managed policies. For more information, see <u>AWS managed policies for AWS Compute Optimizer</u>.

May 18, 2021

AWS Lambda functio	n
recommendations	

Compute Optimizer now generates recommendations for AWS Lambda functions . For more information, see <u>Viewing AWS Lambda</u> function recommendations.

December 23, 2020

Amazon EBS volume recommendations

Compute Optimizer now generates recommend ations for Amazon Elastic Block Store (Amazon EBS) volumes. For more informati on, see <u>Viewing EBS volume</u> recommendations.

December 3, 2020

Amazon EBS metrics and encrypted S3 buckets

Compute Optimizer now analyzes the read/write operations per second (ops), and the read/write bytes per second (Bps) of the Amazon Elastic Block Store (Amazon EBS) volumes that are attached to an instance. The data is used to generate recommendations. You can also view EBS read/writ e bandwidth (operations per second), and EBS read/ write throughput (KiBps) graphs in the Compute Optimizer console. For more information, see Viewing EC2 instance recommend ations. You can also now export recommendations to encrypted Amazon S3 buckets. For more informati on, see Exporting recommend ations.

October 7, 2020

Recommendations export

Recommendations can be exported to Amazon Simple Storage Service (Amazon S3). For more information, see Exporting recommendations.

June 10, 2020

Self-service opt-out

AWS Command Line Interface now supports self-service optout. For more information, see Opting out your account. April 6, 2020

Service release

Compute Optimizer released.

December 2, 2019